

DPL Command Reference

for Fiji Platform Printers

User Guide

Disclaimer

Honeywell International Inc. (“HII”) reserves the right to make changes in specifications and other information contained in this document without prior notice, and the reader should in all cases consult HII to determine whether any such changes have been made. The information in this publication does not represent a commitment on the part of HII.

HII shall not be liable for technical or editorial errors or omissions contained herein; nor for incidental or consequential damages resulting from the furnishing, performance, or use of this material.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated into another language without the prior written consent of HII.

©2010 - 2021 Honeywell International Inc. All rights reserved.

Other product names or marks mentioned in this document may be trademarks or registered trademarks of other companies and are the property of their respective owners.

Web Address: sps.honeywell.com

Other product names or marks mentioned in this document may be trademarks or registered trademarks of other companies and are the property of their respective owners.

Patents

For patent information, please refer to www.hsmpats.com.

TABLE OF CONTENTS

Chapter 1 - Customer Support	1
Technical Assistance	1
Product Service and Repair	1
Limited Warranty	1
Send Feedback	1
Chapter 2 - DPL Command Reference	3
Control Code Command Functions Introduction	3
Supported Printers	3
Attention Getters	3
Easy Control Codes	4
Alternate Control Code Modes	4
About DPL	6
Commands Listed by Name	7
Commands Listed by Syntax	24
Immediate Commands	41
System Level Commands	42
Label Format Commands	43
Label Formatting Commands	44
Format Record Commands	45
Bar Code	45
Font Loading Commands	48
Extended System Level Commands	49
Configuration Commands	50
Chapter 3 - Commands	53
- <) Make Last Field entered a Decrement Field	54
(s#W Character Download Data	56
)s###W Font Descriptor	57
^ Set Count by Amount	58
*c###D Assign Font ID Number	59
*c###E Character Code	60
+ > (Make Last Field entered an Increment Field	61
A Set Format Attribute	63
A/a Code 3 of 9 Bar Code	64
AS Single Byte Symbol Set	65

B Bar Code Magnification	66
B/b UPC-A Bar Code	67
BP British Pound	68
C Set Column Offset Amount	69
C/c UPC-E Bar Code	70
CC Control Codes	71
CF Column Adjust Fine Tune	72
CH Comm Heat Commands	73
CL Continuous Label Length	74
CO Column Offset	75
CS Comm Speed Commands	76
CT Comm TOF Commands	77
D Set Dot Size Width and Height	78
D/d Interleaved 2 of 5 (I 2 of 5) Bar Code	79
DK Darkness	80
DM Default Module	81
DS Double Byte Symbol Set	82
E Terminate Label Formatting Mode and Print Label	83
E/e Code 128 Bar Code	84
ES ESC Sequences	86
F/f EAN-13 Bar Code	87
FA Format Attributes	88
FM Feedback Mode	89
G Place Data in Global Register	90
G/g EAN-8 Bar Code	91
H Enter Heat Setting	92
H/h Health Industry Bar Code (HIBC)	93
HE Heat	94
I/i Codabar Bar Code	95
IC Ignore Control Codes	96
IE Ignore Distances	97
IP Process SOH (Data)	98
J Justification	99
J/j Interleaved 2 of 5 (with a Modulo 10 Checksum) Bar Code	100
K Plessey	101
L/l Interleaved 2 of 5 (with a Modulo 10 Checksum and Bearer Bars) Bar Code	102
LM Label Store	103
LR Label Rotation	104
LW Label Width	105
M Select Mirror Mode	106
m Set Metric Mode	107
M/m 2-Digit UPC Addendum Bar Code	108
ML Maximum Length	109

MT Media Type	110
n Set Inch (Imperial) Mode	111
N/n 5-Digit UPC Addendum Bar Code	112
NS Disable Symbol Set Selection	113
O/o Code 93 Bar Code	114
P Set Print Speed	115
p Postnet Bar Code	116
PD Present Distance	117
PJ Present Adjust Fine Tune	118
PM Pause Mode	119
pS Print Speed	120
Q Set Quantity of Labels to Print	121
Q/q UCC/EAN Code 128 Bar Code	122
QQ Query Configuration	123
R Set Row Offset Amount	124
r Recall Stored Label Format	125
R/r UCC/EAN Code128 K-MART NON EDI Bar Code	126
RF Row Adjust Fine Tune	127
RO Row Offset	128
S Set Feed Speed	129
s Store Label Format in Module	130
S/s UCC/EAN Code 128 Random Weight Bar Code	131
SA SOP Adjust	132
SL Stop Location	133
SM Maximum Length Ignore	135
SOH # Reset	136
SOH * Reset	137
SOH A Send ASCII Status String	138
SOH a Send ASCII Extended Status String	139
SOH B Toggle Pause	141
SOH C Stop/Cancel	142
SOH E Send Batch Remaining Quantity	143
SOH e Send Batch Printed Quantity	144
SOH F Send Status Byte	145
ST Sensor Type	146
STX a Enable Feedback Characters	147
STX c Set Continuous Paper Length	148
STX E Set Quantity for Stored Label	149
STX e Select Edge Sensor	150
STX F Form Feed	151
STX G Print Last Label Format	152
STX I Input Image Data	153
STX i Scalable Font Downloading	154

STX J Set Pause for Each Label	155
STX k Test Communication Port	156
STX Kc Configuration Set	157
STX KC Get Configuration	177
STX KE Character Encoding	179
STX L Enter Label Formatting Command Mode	180
STX M Set Maximum Label Length	181
STX m Set Printer to Metric Mode	182
STX n Set Printer to Imperial Mode	183
STX p Controlled Pause	184
STX Q Clear All Modules	185
STX q Clear Module	186
STX r Select Reflective Sensor	187
STX S Recall Global Data and Place in Field	188
STX S Set Feed Speed	189
STX T Print Time and Date	190
STX T Print Quality Label	191
STX t Test DRAM Memory Module	192
STX U Label Format String Replacement Field	193
STX v Request Firmware Version	194
STX W Request Memory Module Information	195
STX w Test Flash Memory Module	197
STX X Set Default Module	198
STX x Delete File from Module	199
STX y Select Font Symbol Set	200
STX Z Print Configuration Label	201
STX z Pack Module	203
T Telepen	204
T Set Field Data Line Terminator	205
TP TOF Precedence	206
U Mark Previous Field as a String Replacement Field	207
u UPS MaxiCode, Modes 2 & 3 Bar Code	208
U UPS MaxiCode, Modes 2 & 3 Bar Code with Byte Count Specifier	210
UM Unit of Measure	211
v FIM	212
W1c DataMatrix Bar Code	213
W1C DataMatrix Bar Code with Byte Count Specifier	218
W1d / W1D QR Code Bar Code	219
W1f / W1F Aztec Bar Code	226
W1I EAN128 Bar Code (with Auto Subset Switching)	232
W1J Code 128 Bar Code (with Auto Subset Switching)	234
W1k GS1 DataBar Bar Code	236
W1L Planet Code Bar Code	240

W1m / W1M Australia Post 4-State Bar Code	241
W1p Intelligent Mail Bar Code (IMB)	243
W1t TCIF Linked 3 of 9 (TLC39)	244
W1z MicroPDF417 Bar Code	246
W1Z Micro PDF417 Bar Code with Byte Count Specifier	250
X Terminate Label Formatting Mode	251
y Select Font Symbol Set	252
z Zero (Ø) Conversion to "0"	253
Z PDF-417 Bar Code with Byte Count Specifier	254
z PDF-417 Bar Code	255

Chapter 4 - Symbol Sets 257

Double Byte Sets	258
Single Byte Sets	259

Chapter 5 - Configuration 263

DPL Configuration Menu	264
System Settings	265
Default Module	266
Single Byte Symbol Set	267
Format Attributes	270
Label Rotation	271
Label Store	272
Units of Measure	273
Column Adjust	274
Row Offset	275
Pause Mode	276
Use British Lbs	277
Host Settings	278
Feedback Characters	279
Control Codes	280
Custom CNTBY Char	280
Custom CR Char	280
Custom SOH Char	281
Custom STX Char	281
Ignore Commands	282
Ignore Cntrl Code Data	282
Ignore Escape Sequences	282
Ignore Heat Cmd	282
Ignore SOH Data	283
Ignore Speed Cmd	283

Ignore Symbol Set Cmd	283
Ignore TOF Sensing Cmd	285
STX Kc Configuration Set	286

Chapter 6 - System Behavior 307

Configuration Persistence	308
Error Message Behavior	310
Font Downloading Behavior	311
Head Closure / Power Up Behavior	312
Internal Drive Mapping	313
Label Length Behavior	314
Large Bar Code Printing Behavior	316
Label Width Behavior	317
Pause / Cancel Label behavior	318
Printer Restart Behavior	320
Stop Location Behavior	321

Chapter 7 - Commands Not Supported 323

Immediate Commands	324
Label Formatting Commands	325
Label Formatting Commands	326
S Set Feed Speed	327
p Set Backfeed Speed	327
Bar Code Format Record Commands	329
K Plessey	329
W1t TCIF Linked 3 of 9 (TLC39)	330
T Telepen	331
v FIM	332
W1m / W1M Australia Post 4-State Bar Code	333
Format Record Commands	334
Scalable Fonts	334
Scalable Font K1: Gothic E Kanji (Downloaded / Embedded)	337
System Level Commands Not Supported	338
STX M Set Maximum Label Length	339
Extended System Commands	340
Configuration Commands Not Supported	342
SA SOP Adjust	344
IE Ignore Distances	345
ML Maximum Length	346
PJ Present Adjust Fine Tune	346

Symbol Sets	347
Old Commands Not Supported	348
System Level Commands	349
Extended System Commands	350
Configuration Commands	351

Chapter 8 - Reference Information 355

Speed Ranges	356
Format Record Structure	359
Internal Bitmapped Font	361
Smooth/Downloaded Bitmapped Fonts	364
Scalable Fonts	366
Images	369
Lines and Boxes	370
Polygons	372
Circles	374
Bar Code Format Record Structure	375
Bar Code Summary Data	377
Bar Code Default Widths and Heights	380

CUSTOMER SUPPORT

Technical Assistance

To search our knowledge base for a solution or to log in to the Technical Support portal and report a problem, go to www.hsmcontactsupport.com.

For our latest contact information, see www.honeywellaidc.com/locations.

Product Service and Repair

Honeywell International Inc. provides service for all of its products through service centers throughout the world. To find your service center, go to www.honeywellaidc.com and select Support. Contact your service enter to obtain a Return Material Authorization number (RMA #) before you return the product.

To obtain warranty or non-warranty service, return your product to Honeywell (postage paid) with a copy of the dated purchase record.

Limited Warranty

Refer to www.honeywellaidc.com/warranty_information for your product's warranty information.

Send Feedback

Your feedback is crucial to the continual improvement of our documentation. To provide feedback about this manual, contact the Honeywell Technical Communications department at ACSHSMTechnicalCommunications@honeywell.com.

Control Code Command Functions

Introduction

The printer requires a special “attention-getter” character in order to receive a command sequence, informing the printer that it is about to receive a command and the type of command it will be. Control Commands, System-Level Commands, and Font Loading Commands have their own unique attention-getter, followed by a command character that directs printer action.

Supported Printers

Printer Type	Printer Model
Fiji Printers	PC23, PC23d, PC42d, PC42t, PC43d, PC43t
	PD43, PD43c
	PM23c, PM43, PM43c
	PM42
	PX940
	PXie Series
	PX240 Series
	PM45 Series
	PD45 Series

Attention Getters

The attention-getters (e.g., “SOH”) are standard ASCII control labels that represent a one character control code (i.e., ^A or Ctrl A).

Attention Getter	ASCII Character	Decimal Value	HEX Value
Immediate Commands	SOH	1	01
System-Level Commands	STX	2	02
Font Loading Commands	ESC	27	1B

Easy Control Codes

DPL has been enhanced to accept a 3-character SOH and STX sequence. Easy Control Codes are always enabled, whether in Standard, Alternate, Alternate 2, or Custom Control Code Mode. Two types of sequences have been created to meet any application's requirements. Use these sequences where you normally would use a single SOH or STX character.

These sequences will not function when the printer input mode is selected to "auto".

Control Character	3 "%" Character Sequence	3 "^" Character Sequence	Command Type
SOH	%01	^01	Control
STX	%02	^02	System

Alternate Control Code Modes

For systems unable to transmit certain control codes, Alternate Control Code Modes are available. Configuring the printer to operate in an Alternate Control Code Mode (selected via the Setup Menu, the <STX>Kc command or, where applicable, the <STX>KD command) requires the substitution of Standard Control Characters with Alternate Control Characters in what is otherwise a normal data stream.

Control Character	Standard	Alternate	Alternate 2	Custom	Command Type
SOH	0x01	0x5E	0x5E	User Defined	Control
STX	0x02	0x7E	0x7E		System
CR	0x0D	0x0D	0x7C		Line Termination
ESC	0x1B	0x1B	0x1B		Front Loading
"Count By" *	0x5E	0x40	0x40		Label Formatting

*See Label formatting Commands, ^ set count by amount

Note: Throughout this manual <SOH>, <STX>, <CR>, <ESC>, and ^ will be used to indicate control codes. The actual values will depend on whether standard or alternate control codes are enabled for the particular application.

Alternate Line Terminator Example: Alternate Control Codes provide for substitution of the line terminator, as well as the control characters listed above. For example using Alternate 2, the line terminator <CR> (0x0D) is replaced by | (0x7C). The following is a sample label format data stream for a printer configured for Alternate-2 Control Codes:

~L|1911A10001000101234560|X|~UT01ABCDE|~G|

About DPL

The Datamax Programming Language (DPL) is a feature-rich printer command language designed to print labels, tags and receipts. This Command Reference is for the version of DPL implemented in the printers listed below. See the Datamax-O'Neil DPL programming manuals for specifics of DPL in those printers.

This document contains:

- [Commands Not Supported](#)
- [Configuration](#)
- [Configuration Commands](#)
- [Extended System Level Commands](#)
- [Font Loading Commands](#)
- [Immediate Commands](#)
- [Label Format Commands](#)
- [Symbol Sets](#)
- [System Behavior](#)
- [System Level Commands](#)

Datamax-O'Neil printers support their own implementation of DPL. For more information, see the product page for your printer at sps.honeywell.com.

Commands Listed by Name

Commands	Syntax	Description
2-Digit UPC Addendum Bar Code	M/m	Label Format Bar Code ID to print a 2-Digit UPC Addendum Bar Code with (M) or without (m) Human Readable text
5-Digit UPC Addendum Bar Code	N/n	Label Format Bar Code ID to print a 5-Digit UPC Addendum Bar Code with (N) or without (n) Human Readable text
Assign Font ID Number	*c###D	This command is the first command required for downloading a font to either RAM or Flash Memory modules. ESC represents the ASCII control character 27.
Australia Post 4-State Bar Code	W1m/W1M	Label Format Bar Code ID to print barcode in the Australia Post System.
Avalanche	AV	This command allows the printer to be configured for the Avalanche utility.
Aztec Bar Code	W1f/W1F	Label Format Bar Code ID's for printing an Aztec bar code in variable and fixed length modes.
Bar Code Magnification	B	This command provides a mechanism to specify the Bar Code magnification.
British Pound	BP	This command, when enabled, will automatically switch from the Number symbol (#) found at 0x23 (default PC-850 Multilingual Symbol Set) to\ the British Pound symbol (£) at 0x9C.
Character Code	*c###E	This code is the ASCII decimal value corresponding to the next downloaded character.
Character Download Data	(s#W	This command contains all of the information for one downloaded character.

Commands	Syntax	Description
Character Encoding	STX KE	This command is provided primarily as a means for users of 7-bit communication and to embed control characters and extended ASCII characters in their data streams. Any character in the DPL data stream may be substituted with a delimited two-character ASCII hexadecimal numeric equivalent. The command allows the delimiting character to be selected, and the encoding to be enabled or disabled. When character encoding is enabled, the printer will decode any ASCII hexadecimal numeric pairs following the delimiter as single-byte values. Character encoding is used where control characters cannot be transmitted or where control characters within data may prematurely terminate a label format record. Although the delimiter may be changed at any time (except within a label format definition), there cannot be more than one defined delimiter, and character encoding must be disabled with <STX>KEN prior to re-enabling regardless of any change in the delimiter.
Clear All Modules	STX Q	This command instructs the printer to clear all Flash and DRAM modules; see the printer manual for module options. All stored data will be erased.
Clear Module	STX q	This command clears the selected Flash or DRAM module. During normal operations if a module becomes corrupted (identifiable when the printer responds with a "No Modules Available" message to a <STX>W command) it must be cleared. All stored data will be destroyed.
Codabar Bar Code	I/i	Label Format Bar Code ID to print a Codabar Bar Code with (I) or without (i) Human Readable Text
Code 128 Bar Code	E/e	Label format Bar Code ID to print a Code 128 Bar Code with (E) or without (e) human readable text
Code 128 Bar Code (with Auto Subset Switching)	W1J	Label Format Bar Code ID (W1J) to print a Code 128 (with Auto Subset Switching)
Code 3 of 9 Bar Code	A/a	Label format Bar Code ID to print a 3 of 9 Bar Code with (A) or without (a) Human Readable text
Code 93 Bar Code	O/o	Label Format Bar Code ID to print a Code 93 Bar Code with (O) or without (o) Human Readable text

Commands	Syntax	Description
Column Adjust Fine Tune	CF	This command fine-tunes the Column Offset setting by shifting both the horizontal start of print position and the Label Width termination point to the right in dots to compensate for slight mechanical differences sometimes evident when multiple printers share label formats.
Column Offset	CO	See Cnnnn for command details.
Comm Heat Commands	CH	This command causes the printer to ignore DPL Heat commands. Ignore by setting value to N. Process by setting value to Y (default). When set to ignore Heat commands values are controlled via the menu setting.
Comm Speed Commands	CS	This command causes the printer to ignore DPL speed commands. Ignore by setting value to N. Process by setting value to Y (default). When set to ignore speed values are controlled via the menu setting.
Comm TOF Commands	CT	This command causes the printer to ignore DPL TOF (Gap, Continuous, and Reflective) commands. Ignore by setting value to N. Process by setting value to Y (default). When set to DPL TOF values are controlled via the menu setting.
Configuration Set	STX Kc	This command specifies the Power-up Configuration parameter values for the printer and is equivalent to using other system commands followed by the <SOH>U. This command is intended for easily configuring a custom setup, but NOT for dynamic configuration changes. Configuration commands are examined for differences relative to the current configuration, and have no impact when no differences exist. Printers will reset upon completion of a command stream containing parameter value changes. In any case, no commands should be sent to the printer until this reset is complete. Other command highlights include the following
Continuous Label Length	CL	See <STX>c for command details.
Control Codes	CC	This command, depending upon printer type, allows a change to the prefix of the software commands interpreted by the printer.

Commands	Syntax	Description
Controlled Pause	STX p	This command will cause the printer to pause only after all previously received commands are executed, often useful between label batches. (This command will not clear the pause condition; see <SOH>B).
Darkness	DK	This command adjusts the length of the print head strobe to fine tune the HEAT setting. (Linear mapping Default: DPL 32 = Honeywell O)
DataMatrix Bar Code	W1c	Label Format Bar Code ID (W1c) to print a DataMatrix Bar Code.
DataMatrix Bar Code with Byte Count Specifier	W1C	Label Format Bar Code ID (W1C) to print a DataMatrix Bar Code. This ID allows users to specify the number of data byte to be in the Bar Code. This allows for data.values 0x00 through 0xFF to be included within the data strings without conflicting with the DPL format record terminators.
Default Module	DM	See <STX>X for command details.
Delete File from Module	STX x	This command removes a specific file from the specified module. The file name is removed from the module directory and thus the file cannot be accessed.
Disable Symbol Set Selection	NS	This command set the printer to ignore any DPL symbol set selection commands
Double Byte Symbol Set	DS	See <STX>y or ySxxfor command details.
EAN128 Bar Code (with Auto Subset Switching)	W1I	Label Format Bar Code ID (W1I) to print EAN128 (with Auto Subset Switching and Human Readable text).
EAN-13 Bar Code	F/f	Label format Bar Code ID to print an EAN-13 Bar Code with (F) or without (f) human readable text
EAN-8 Bar Code	G/g	Label Format Bar Code ID to print an EAN-8 Bar Code with (F) or without (f) human readable text
Enable Feedback Characters	STX a	Enables the feedback of hex data characters to be returned from the printer following specific events during data parsing and printing.

Commands	Syntax	Description
Enter Heat Setting	H	This command changes the "on time" of elements of the print head. The default setting is 10 (except in the case of printers with a menu, where the default setting can be changed through the keypad). An increase or decrease in this value results in a change of heat applied by the print head to the media, lightening or darkening the print contrast accordingly. This is helpful when using different media types, each requiring a different amount of heat to properly image the media. The host device can send this command value to correct the heat setting per the application.
Enter Label Formatting Command Mode	STX L	This command switches the printer to the Label Formatting Command Mode, where the printer expects to receive only Record Structures and Label Formatting Commands. Immediate, System-Level, and Font Loading commands will be ignored until the label formatting mode is terminated with E, s, or X, (see Label Formatting Commands for additional information).
ESC Sequences	ES	This command allows data containing invalid ESC control code sequences to be processed (helpful because some systems send a "banner" to the printer). When set to "Disabled," ESC sequences are ignored and the data is processed. Bitmapped font downloads are disabled in this mode.
Feedback Mode	FM	See <STX>a for command details.
FIM	v	
Font Descriptor)s###W	This command (typically first data in a font file) contains all of the information about the font contained in the file. Different font generation software will create different length header information, but the initial 64 bytes will remain consistent with the PCL-4 (HP LaserJet II) format.
Form Feed	STX F	This commands the printer to form feed to the next start of print.
Format Attributes	FA	See the "An" command for details.

Commands	Syntax	Description
Get Configuration	STX KC	This command returns the configuration of the printer. The form of the returned data is similar to that of a printed Configuration Label. This command should be parsed by KEYWORDS, not character positions. Each line is terminated by a CR (0x0d) & LF (0x0a).
GS1 DataBar Bar Code	W1k	Label Format Bar Code ID (W1k) to print GS1 DataBar Bar Code. Supports six types: GS1 DataBar, DataBar Truncated, DataBar Stacked, DataBar Stacked Omni-Directional, DataBar Limited, and DataBar Expanded.
Health Industry Bar Code (HIBC)	H/h	Label Format Bar Code ID to print a Health Industry Bar Code (HIBC) with (H) or without (h) human readable text
Heat	HE	See Hnn for command details. DPL-Honeywell Mapping (3.3 * DPL = Honeywell; 23 + as Honeywell 100; Default DPL 10 = Honeywell 56,)
Ignore Control Codes	IC	This command allows the user to remove control codes (< 20 Hex) in the data field. The selected line terminator is processed. When enabled, DPL Control Code (SOH, STX, CR, ESC, and ^) characters are removed from the data string. (Note that some fonts do have printable characters in this range and they will not be printed when enabled.)
Ignore Distances	IE	This command causes the printer to ignore DPL distance commands. Ignore by setting value to N. Process by setting value to Y (default). When set to ignore distance values are controlled via the menu setting.
Input Image Data	STX I	This command downloads images to the printer. The data that immediately follows the command string will be image data.
Intelligent Mail Bar Code (IMB)	W1p	Label Format Bar Code ID (W1p) to print an Intelligent Mail Bar Code (IMB).
Interleaved 2 of 5 (I 2 of 5) Bar Code	D/d	Label format Bar Code ID to print an Interleaved 2 of 5 (I 2 of 5) Bar Code with (D) or without (d) human readable text

Commands	Syntax	Description
Interleaved 2 of 5 (with a Modulo 10 Checksum and Bearer Bars) Bar Code	L/l	Label Format Bar Code ID to print an Interleaved 2 of 5 Bar Code (with a Modulo 10 Checksum and Bearer Bars) and with (L) or without (l) Human Readable text
Interleaved 2 of 5 (with a Modulo 10 Checksum) Bar Code	J/j	Label Format Bar Code ID to print an Interleaved 2 of 5 (with a Modulo 10 Checksum) with (J) or without (j) Human Readable text
Justification	J	This command changes the printing justification.
Label Format String Replacement Field	STX U	This command places new label data into format fields to build a label. Two options are available: Exact Length and Truncated Length.
Label Rotation	LR	This command sets label rotation, allowing formats to be flipped 180 degrees. DPL Menu Display "Label Rotation"
Label Store	LM	This command selects the level of stored format recall to include the label-formatting command fields, or the label-formatting command fields and the printer state.
Label Width	LW	This command sets the maximum limit for the printable width. Objects extending beyond this limit will NOT print;
Make Last Field entered a Decrement Field	- <)	This command is used to print sequenced labels. It causes the printer to automatically decrement a field in a batch of labels. The numeric data in the field will decrement by the value assigned after the minus (-) sign each time a label is produced [or the less than character [<] can be substituted to make the field decrement alphabetically, or the right parenthesis [)] can be substituted to make the field decrement hexadecimal data (valid hexadecimal data is 0-9 or A-F, usually in pairs)]. This command is effective only on the label format record that it follows, and is intended to be used with the Q, <STX>E or <STX>G commands.

Commands	Syntax	Description
Make Last Field entered an Increment Field	+ > (This command is used to print sequenced labels. It causes the printer to automatically increment a field in a batch of labels. The numeric data in the field will increment by the value assigned after the plus sign (+) each time a label is produced [or the greater than symbol [>] can be substituted to make the field increment alphabetically, or the left parenthesis [(] can be substituted to make the field increment hexadecimal data (valid hexadecimal data is 0-9 or A-F, usually in pairs)]. This command is effective only on the label format record that it follows, and is intended to be used with the Q, <STX>E, or <STX>G commands.
Mark Previous Field as a String Replacement Field	U	This command controls the formatting of replacement data. Specifying a field as a string replacement for dynamic, not static, fields will optimize throughput. See <STX>U.
Maximum Length - Distance printer moves paper before detecting TOF fault	ML	See <STX>M for command details.
Maximum Length Ignore	SM	This command controls recognition of the <STX>M command.
Media Type	MT	This command selects the printing method: Direct Thermal for use with heat sensitive media or Thermal Transfer for use with media requiring a ribbon to create an image.
Micro PDF417 Bar Code with Byte Count Specifier	W1Z	Label format Bar Code ID (W1Z) to print a MicroPDF417 Bar Code. MicroPDF417 is a 2 dimensional Bar Code capable of holding large amounts of data in a small area. It provides a high level of redundancy and error checking. The Byte Count specifier allows for data values 0x00 through 0xFF to be included within the data strings without conflicting with the DPL format record terminators.
MicroPDF417 Bar Code	W1z	Label format Bar Code ID (W1z) to print a MicroPDF417 Bar Code. MicroPDF417 is a 2 dimensional Bar Code capable of holding large amounts of data in a small area. It provides a high level of redundancy and error checking.

Commands	Syntax	Description
Pack Module	STX z	This command is performs a memory module compression. DO Legacy only. Not required for A,H,M, I and E Class or Honeywell base printers.
Pause Mode	PM	See <STX>J for command details.
PDF-417 Bar Code	z	Label Format Bar Code ID (z) to print a PDF-417 Bar Code.
PDF-417 Bar Code with Byte Count Specifier	Z	Label Format Bar Code ID (Z) to print a PDF-417 Bar Code. This ID allows users to specify the number of data byte to be in the Bar Code. This allows for data.values 0x00 through 0xFF to be included within the data strings without conflicting with the DPL format record terminators.
Place Data in Global Register	G	The "G" command saves the print data of a print format record in a global register (temporary storage). This data may be retrieved and copied to another record in the same label format using the special Label Formatting Command: <STX>S. Global registers are named in the order received, beginning with Register A, ending at Register Z, and incrementing with each instance of the G command use.
Planet Code Bar Code	W1L	Label Format Bar Code ID (W1L) to print a Planet Code Bar Code.
Plessey	K	
Postnet Bar Code	p	Label Format Bar Code ID to print a Postnet Bar Code
Present Adjust Fine Tune	PJ	This command fine-tunes the Present Distance setting in dots to compensate for slight mechanical differences sometimes evident if multiple printers share label formats.
Present Distance	PD	This command sets the label stop position past the start of print. When the next label format is received, the printer will automatically backfeed to the start position. If the present distance is set to zero, the printer will operate without reversing.
Print Configuration Label	STX Z	This command causes the printer to produce a Database Configuration Label. To capture all printed information, use the labels as wide as the maximum print width and at least four inches (102 mm) long.

Commands	Syntax	Description
Print Last Label Format	STX G	This command prints a previously formatted label and restarts a canceled batch job following the last processed label. This is used when there is a label format in the buffer.
Print Quality Label	STX T	This command instructs the printer to produce a Print Quality label, a format comprised of different patterns and Bar Codes useful in printer setup. To capture all printed information, use the labels as wide as the maximum print width and at least four inches (102 mm) long.
Print Speed	pS	See command Pa (Print Speed Mnemonic Table) for details.
Print Time and Date	STX T	This command, using string characters and markers, allows time and date data to be selected and retrieved from the internal clock. In addition, the <STX>T may be preceded by data to be printed/encoded, and/or the string may be terminated by an <STX> command followed by more data then <CR> terminated. The string characters/markers are not printed; instead, the label will show the corresponding print value.
Process SOH (Data)	IP	Whether to allow SOH processing.
QR Code Bar Code	W1d/W1D	Label Format Bar Code ID's for printing a QR Code bar code in Auto Format (d) or Manual Format (D) modes.
Query Configuration	QQ	This command requires a parameter of either K or Q.
Recall Global Data and Place in Field	STX S	This command, when in the format record data field, places data from a specified global register into the data field. See the G command.
Recall Stored Label Format	r	This command is used to retrieve label formats stored on a memory module.
Request Firmware Version	STX v	This command causes the printer to send its version string (same as printed on the configuration label). The version may be different from printer to printer.
Request Memory Module Information	STX W	This command requests a memory module directory listing. Results may vary depending on printer class, model, or firmware version.

Commands	Syntax	Description
Reset	SOH #	Returns all settings to last-saved settings, purges all current print jobs and clears both the communications and print buffers. Also clears DRAM memory. This command does not cause the printer to restart.
Reset	SOH *	This command forces a soft reset of the microprocessor. The printer is initialized to the same state as a power cycle.
Row Adjust Fine Tune	RF	This command shifts the vertical start of print position in dots upward or downward.
Row Offset	RO	See Rnnnn for command details. DPL only parameter.
Scalable Font Downloading	STX i	The command to download TrueType (.TTF) scalable fonts to the printer.
Select Edge Sensor	STX e	This command enables the transmissive (see-through) sensing for top-of-form detection of die-cut and holed (notched) media.
Select Font Symbol Set	STX y	This command selects the scalable font symbol set. The selected symbol set remains active until another symbol set is selected. Option dependent and not all symbol sets can be used with all fonts. See "Symbol Sets" specification section for complete list of "Single Byte Sets" and "Double Byte Sets".
Select Font Symbol Set	y	This command, like the <STX>y, selects the scalable font symbol set. The selected symbol set remains active until another symbol set is selected. See "Symbol Sets" specification section for complete list of "Single Byte Sets" and "Double Byte Sets".
Select Mirror Mode	M	This command instructs the printer to "mirror" all subsequent print field records, producing fields that are transposed visually.
Select Reflective Sensor	STX r	This command enables reflective (black mark) sensing for top-of-form detection of rolled butt-cut, and fan-fold or tag stocks with reflective marks on the underside. This Media Sensor will detect a minimum mark of 0.1 inches (2.54 mm) between labels (see the <i>Operator's Manual</i> for media requirements). The end of the black mark determines the top of form. Use the <STX>O command to adjust the print position.

Commands	Syntax	Description
Send ASCII Extended Status String	SOH a	This command allows the host computer to check an extended current printer status. The printer returns a string of seventeen characters, followed by a carriage return. Most characters (see below) indicate an associated condition, either true (Y) or false (N). Byte 1 is transmitted first.
Send ASCII Status String	SOH A	This command allows the host computer to check the current printer status. The printer returns a string of eight characters, followed by a carriage return. Each character (see below) indicates an associated condition, either true (Y) or false (N). Byte 1 is transmitted first. See <SOH>F for alternative response.
Send Batch Printed Quantity	SOH e	This command causes the printer to return a 5-digit number indicating the quantity of labels that have been printed in the current batch, followed by a carriage return.
Send Batch Remaining Quantity	SOH E	This command returns a four or five digit number indicating the quantity of labels that remain to be printed in the current batch, followed by a carriage return.
Send Status Byte	SOH F	This command instructs the printer to send a single status byte where each bit (1 or 0) represents one of the printer's status flags, followed by a carriage return (see below). If an option is unavailable for the printer, the single bit will always be zero. See <SOH>A.
Sensor Type	ST	Sets sensor type.
Set Column Offset Amount	C	This command allows horizontal adjustment of the point where printing begins. The printer is instructed to print label formats nnnn units to the right of the position that the format specifies. This feature is useful when a single format is to be printed on labels containing preprinted information.
Set Continuous Paper Length	STX c	This command sets the label size for applications to using continuous media. It disables the top-of-form function performed by the Media Sensor. The sensor, however, continues to monitor paper-out conditions.

Commands	Syntax	Description
Set Count by Amount	^	This command allows applications using the increment / decrement field command to print more than one label with the same field value before the field data is updated. The default is 1.
Set Default Module	STX X	This command, typically used prior to the loading of HP/PCL-4 formatted bitmapped fonts (see Font Loading Commands), is designed to allow the user to select between modules when downloading information.
Set Dot Size Width and Height	D	This command is used to change the size of a printed dot, hence the print resolution – dots per inch (DPI) of the print head. By changing the height of a dot, the maximum length of a label can be increased or decreased.
Set Feed Speed	S	This command controls the rate at which the label is moved through non-printed areas. The setting remains unchanged unless another feed speed command is received or until the printer is reset.
Set Feed Speed	STX S	This command controls the output rate of the media when the FEED Key is pressed, or when feeding white space at the end of a label.
Set Field Data Line Terminator	T	This command, intended for use with record types that accept binary data (e.g., PDF417), allows binary control codes (e.g., a carriage return) to be embedded in the printed data by setting an alternate data line terminator. Valid only for the next format record, the terminator then defaults back to the carriage return.
Set Format Attribute	A	This command specifies the type of format operation and remains in effect until another format command is specified or another label format has begun (<STX>L).
Set Inch (Imperial) Mode	n	This command sets the printer to measure in inches. When this command is sent, all measurements will change to inches. Default mode, and is menu selectable.

Commands	Syntax	Description
Set Maximum Label Length	STX M	This command instructs the printer move media this distance in search of the top-of form (label edge, notch, black mark, etc.) before declaring a paper fault. A paper fault condition can occur if this setting is too close (within 0.1 inch [2.54 mm]) to the physical length of the label. Therefore, it is a good practice to set this command to 2.5 to 3 times the actual label length used. The minimum value should be at least 5" (127 mm).
Set Metric Mode	m	This command sets the printer to measure in metric. When this command is sent, all measurements will be interpreted as metric values, (e.g., a column offset of 0010 will be interpreted as 1.0 mm).
Set Pause for Each Label	STX J	This command causes the printer to pause after printing each label. It is intended for use with the peel mechanism or tear bar when the Present Sensor option is not installed.
Set Print Speed	P	This command sets a print speed for a label or batch of labels.
Set Printer to Imperial Mode	STX n	This command sets the printer to interpret measurements as inch values (e.g., <STX>c0100 will equal 1.00 inch), and is the default mode.
Set Printer to Metric Mode	STX m	This command sets the printer to interpret measurements as metric values (e.g., <STX>c0100 will equal 10.0 mm). The default is Imperial (see <STX>n).
Set Quantity for Stored Label	STX E	This command sets the number of labels for printing using the format currently in the print buffer. (The printer automatically stores the most recent format received in the buffer until the printer is reset or power is removed.) When used in conjunction with the <STX>G command, this will print the format.
Set Quantity of Labels to Print	Q	This command sets the number of the label copies to be printed. A one to five digit value is allowed, if the command is delimited by a carriage return <CR>. This permits host applications to generate label quantity commands without the need to pad leading zeros. (A four-digit command value does not need to be <CR> terminated.)

Commands	Syntax	Description
Set Row Offset Amount	R	This command allows vertical adjustment of the point where printing begins. The printer is instructed to print label formats nnnn units above the position that the format specifies. This feature is useful when a single format is to be printed on labels containing preprinted information.
Single Byte Symbol Set	AS	This command allows for a default single-byte symbol set. DPL only parameter. Menu Display: "Single Byte Symbol Set"
SOP Adjust	SA	This command shifts the vertical start of print position in dots upward or downward.
Stop/Cancel	SOH C	This command performs the cancel print job function (i.e., it clears the current format from the print buffer, pauses the printer, and illuminates the Paused/Stop Indicator). (The pause condition is removed as described under <SOH>B.)
Stop Location	SL	This command sets the label stopping (and in certain cases the starting) location.
Store Label Format in Module	s	This command stores a label format to a specified module as a .dlb file. Supplying the module name will store the label to that module; otherwise, using C will cause the label format to be stored in the selected default module (see <STX>X). In addition, this command terminates the Label Formatting Command.
TCIF Linked 3 of 9 (TLC39)	W1t	
Telepen	T	
Terminate Label Formatting Mode	X	This command causes the printer, when in label formatting mode, to immediately switch to the system command mode and generate a label format based on the data received at that point. However, unlike the "E" command, it will not print a label. (Other termination commands are the "E" and "s".)

Commands	Syntax	Description
Terminate Label Formatting Mode and Print Label	E	This command causes the printer, when the processing Label Formatting commands, to terminate the Label Formatting Mode then generate, print, and feed a label. The label generated will be based on whatever data has been received to that point, even if no printable data has been received. (Other termination commands are "X" and "s".) Commands sent to the printer after the Terminate Label command must be of the Immediate, System-Level, or Font Download type.
Test Communication Port	STX k	This command instructs the printer to transmit the Y character from the printer's port that received this command. (Failure to receive Y could indicate an interfacing problem.)
Test DRAM Memory Module	STX t	This command is to perform a system DRAM Module memory test.
Test Flash Memory Module	STX w	This command is to performs a system Flash Memory test.
TOF Precedence	TP	This command instructs the firmware to stop printing at the first top of form mark it detects. The default ("No") prints all of the data (traversing the top of form as necessary) then slews to the next TOF.
Toggle Pause	SOH B	This command toggles the printer's paused state between "On" and "Off." (This is the same function achieved by pressing the PAUSE Key.)
UCC/EAN Code 128 Bar Code	Q/q	Label Format Bar Code ID to print a UCC/EAN Code 128 Bar Code with (Q) or without (q) Human Readable
UCC/EAN Code 128 Random Weight Bar Code	S/s	Label Format Bar Code ID to print an UCC/EAN Code 128 Random Weight Bar Code with (S) or without (s) Human Readable text
UCC/EAN Code128 K-MART NON EDI Bar Code	R/r	Label Format Bar Code ID to print an UCC/EAN Code128 K-MART NON EDI Bar Code with (R) or without (r) Human Readable text
Unit of Measure	UM	See <STX>m (metric) or <STX>n (imperial) for command details.
UPC-A Bar Code	B/b	Label format Bar Code ID to print a UPC-A Bar Code with (B) or without (b) Human Readable text.

Commands	Syntax	Description
UPC-E Bar Code	C/c	Label format Bar Code ID to print a UPC-E Bar Code with (C) or without (c) Human Readable text
UPS MaxiCode, Modes 2 & 3 Bar Code	u	Label Format Bar Code ID(u) to print a UPS MaxiCode, Modes 2 & 3.
UPS MaxiCode, Modes 2 & 3 Bar Code with Byte Count Specifier	U	Label Format Bar Code ID (U) to print a UPS Maxicode, Modes 2 & 3. This ID allows users to specify the number of data byte to be in the bar code. This allows for special control codes like cr's to be included in the data.
Zero (Ø) Conversion to "0"	z	This command removes the slash zero in fonts 0 to 8, and in the human readable field (if any) of the Bar Codes A to Z. The command applies only to format records containing those fonts and Bar Codes, and is effective only for the label format in which it appears.

Commands Listed by Syntax

Syntax	Commands	Description
- <)	Make Last Field entered a Decrement Field	This command is used to print sequenced labels. It causes the printer to automatically decrement a field in a batch of labels. The numeric data in the field will decrement by the value assigned after the minus (-) sign each time a label is produced [or the less than character [<] can be substituted to make the field decrement alphabetically, or the right parenthesis [)] can be substituted to make the field decrement hexadecimal data (valid hexadecimal data is 0-9 or A-F, usually in pairs)]. This command is effective only on the label format record that it follows, and is intended to be used with the Q, <STX>E or <STX>G commands.
^	Set Count by Amount	This command allows applications using the increment / decrement field command to print more than one label with the same field value before the field data is updated. The default is 1
(s#W	Character Download Data	This command contains all of the information for one downloaded character.
)s###W	Font Descriptor	This command (typically first data in a font file) contains all of the information about the font contained in the file. Different font generation software will create different length header information, but the initial 64 bytes will remain consistent with the PCL-4 (HP LaserJet II) format.
*c###D	Assign Font ID Number	This command is the first command required for downloading a font to either RAM or Flash Memory modules. ESC represents the ASCII control character 27.
*c###E	Character Code	This code is the ASCII decimal value corresponding to the next downloaded character.

Syntax	Commands	Description
+ > (Make Last Field entered an Increment Field	This command is used to print sequenced labels. It causes the printer to automatically increment a field in a batch of labels. The numeric data in the field will increment by the value assigned after the plus sign (+) each time a label is produced [or the greater than symbol (>)] can be substituted to make the field increment alphabetically, or the left parenthesis [(] can be substituted to make the field increment hexadecimal data (valid hexadecimal data is 0-9 or A-F, usually in pairs)]. This command is effective only on the label format record that it follows, and is intended to be used with the Q, <STX>E, or <STX>G commands.
A	Set Format Attribute	This command specifies the type of format operation and remains in effect until another format command is specified or another label format has begun (<STX>L).
A/a	Code 3 of 9 Bar Code	Label format Bar Code ID to print a 3 of 9 Bar Code with (A) or without (a) Human Readable text
AS	Single Byte Symbol Set	This command allows for a default single-byte symbol set. DPL only parameter. Menu Display: "Single Byte Symbol Set"
AV	Avalanche	This command allows the printer to be configured for the Avalanche utility.
B	Bar Code Magnification	This command provides a mechanism to specify the Bar Code magnification.
B/b	UPC-A Bar Code	Label format Bar Code ID to print a UPC-A Bar Code with (B) or without (b) Human Readable text.
BP	British Pound	This command, when enabled, will automatically switch from the Number symbol (#) found at 0x23 (default PC-850 Multilingual Symbol Set) to\ the British Pound symbol (£) at 0x9C.
C	Set Column Offset Amount	This command allows horizontal adjustment of the point where printing begins. The printer is instructed to print label formats nnnn units to the right of the position that the format specifies. This feature is useful when a single format is to be printed on labels containing preprinted information.

Syntax	Commands	Description
C/c	UPC-E Bar Code	Label format Bar Code ID to print a UPC-E Bar Code with (C) or without (c) Human Readable text
CC	Control Codes	This command, depending upon printer type, allows a change to the prefix of the software commands interpreted by the printer.
CF	Column Adjust Fine Tune	This command fine-tunes the Column Offset setting by shifting both the horizontal start of print position and the Label Width termination point to the right in dots to compensate for slight mechanical differences sometimes evident when multiple printers share label formats.
CH	Comm Heat Commands	This command causes the printer to ignore DPL Heat commands. Ignore by setting value to N. Process by setting value to Y (default). When set to ignore Heat commands values are controlled via the menu setting.
CL	Continuous Label Length	See <STX>c for command details.
CO	Column Offset	See Cnnnn for command details.
CS	Comm Speed Commands	This command causes the printer to ignore DPL speed commands. Ignore by setting value to N. Process by setting value to Y (default). When set to ignore speed values are controlled via the menu setting.
CT	Comm TOF Commands	This command causes the printer to ignore DPL TOF (Gap, Continuous, and Reflective) commands. Ignore by setting value to N. Process by setting value to Y (default). When set to DPL TOF values are controlled via the menu setting.
D	Set Dot Size Width and Height	This command is used to change the size of a printed dot, hence the print resolution – dots per inch (DPI) of the print head. By changing the height of a dot, the maximum length of a label can be increased or decreased.
D/d	Interleaved 2 of 5 (I 2 of 5) Bar Code	Label format Bar Code ID to print an Interleaved 2 of 5 (I 2 of 5) Bar Code with (D) or without (d) human readable text
DK	Darkness	This command adjusts the length of the print head strobe to fine tune the HEAT setting. (Linear mapping Default: DPL 32 = Honeywell 0)

Syntax	Commands	Description
DM	Default Module	See <STX>X for command details.
DS	Double Byte Symbol Set	See <STX>y or ySxx for command details.
E	Terminate Label Formatting Mode and Print Label	This command causes the printer, when the processing Label Formatting commands, to terminate the Label Formatting Mode then generate, print, and feed a label. The label generated will be based on whatever data has been received to that point, even if no printable data has been received. (Other termination commands are "X" and "s".) Commands sent to the printer after the Terminate Label command must be of the Immediate, System-Level, or Font Download type.
E/e	Code 128 Bar Code	Label format Bar Code ID to print a Code 128 Bar Code with (E) or without (e) human readable text
ES	ESC Sequences	This command allows data containing invalid ESC control code sequences to be processed (helpful because some systems send a "banner" to the printer). When set to "Disabled," ESC sequences are ignored and the data is processed. Bitmapped font downloads are disabled in this mode.
F/f	EAN-13 Bar Code	Label format Bar Code ID to print an EAN-13 Bar Code with (F) or without (f) human readable text
FA	Format Attributes	See the "An" command for details.
FM	Feedback Mode	See <STX>a for command details.
G	Place Data in Global Register	The "G" command saves the print data of a print format record in a global register (temporary storage). This data may be retrieved and copied to another record in the same label format using the special Label Formatting Command: <STX>S. Global registers are named in the order received, beginning with Register A, ending at Register Z, and incrementing with each instance of the G command use.
G/g	EAN-8 Bar Code	Label Format Bar Code ID to print an EAN-8 Bar Code with (F) or without (f) human readable text

Syntax	Commands	Description
H	Enter Heat Setting	This command changes the "on time" of elements of the print head. The default setting is 10 (except in the case of printers with a menu, where the default setting can be changed through the keypad). An increase or decrease in this value results in a change of heat applied by the print head to the media, lightening or darkening the print contrast accordingly. This is helpful when using different media types, each requiring a different amount of heat to properly image the media. The host device can send this command value to correct the heat setting per the application.
H/h	Health Industry Bar Code (HIBC)	Label Format Bar Code ID to print a Health Industry Bar Code (HIBC) with (H) or without (h) human readable text
HE	Heat	See Hnn for command details. DPL-Honeywell Mapping (3.3 * DPL = Honeywell; 23 + as Honeywell 100; Default DPL 10 = Honeywell 56,)
I/i	Codabar Bar Code	Label Format Bar Code ID to print a Codabar Bar Code with (I) or without (i) Human Readable Text
IC	Ignore Control Codes	This command allows the user to remove control codes (< 20 Hex) in the data field. The selected line terminator is processed. When enabled, DPL Control Code (SOH, STX, CR, ESC, and ^) characters are removed from the data string. (Note that some fonts do have printable characters in this range and they will not be printed when enabled.)
IE	Ignore Distances	This command causes the printer to ignore DPL distance commands. Ignore by setting value to N. Process by setting value to Y (default). When set to ignore distance values are controlled via the menu setting.
IP	Process SOH (Data)	Whether to allow SOH processing.
J	Justification	This command changes the printing justification.
J/j	Interleaved 2 of 5 (with a Modulo 10 Checksum) Bar Code	Label Format Bar Code ID to print an Interleaved 2 of 5 (with a Modulo 10 Checksum) with (J) or without (j) Human Readable text
K	Plessey	

Syntax	Commands	Description
L/l	Interleaved 2 of 5 (with a Modulo 10 Checksum and Bearer Bars) Bar Code	Label Format Bar Code ID to print an Interleaved 2 of 5 Bar Code (with a Modulo 10 Checksum and Bearer Bars) and with (L) or without (l) Human Readable text
LM	Label Store	This command selects the level of stored format recall to include the label-formatting command fields, or the label-formatting command fields and the printer state.
LR	Label Rotation	This command sets label rotation, allowing formats to be flipped 180 degrees. DPL Menu Display "Label Rotation"
LW	Label Width	This command sets the maximum limit for the printable width. Objects extending beyond this limit will NOT print;
M	Select Mirror Mode	This command instructs the printer to "mirror" all subsequent print field records, producing fields that are transposed visually.
m	Set Metric Mode	This command sets the printer to measure in metric. When this command is sent, all measurements will be interpreted as metric values, (e.g., a column offset of 0010 will be interpreted as 1.0 mm).
M/m	2-Digit UPC Addendum Bar Code	Label Format Bar Code ID to print a 2-Digit UPC Addendum Bar Code with (M) or without (m) Human Readable text
ML	Maximum Length - Distance printer moves paper before detecting TOF fault	See <STX>M for command details.
MT	Media Type	This command selects the printing method: Direct Thermal for use with heat sensitive media or Thermal Transfer for use with media requiring a ribbon to create an image.
n	Set Inch (Imperial) Mode	This command sets the printer to measure in inches. When this command is sent, all measurements will change to inches. Default mode, and is menu selectable.
N/n	5-Digit UPC Addendum Bar Code	Label Format Bar Code ID to print a 5-Digit UPC Addendum Bar Code with (N) or without (n) Human Readable text

Syntax	Commands	Description
NS	Disable Symbol Set Selection	This command set the printer to ignore any DPL symbol set selection commands
O/o	Code 93 Bar Code	Label Format Bar Code ID to print a Code 93 Bar Code with (O) or without (o) Human Readable text
P	Set Print Speed	This command sets a print speed for a label or batch of labels.
p	Postnet Bar Code	Label Format Bar Code ID to print a Postnet Bar Code
PD	Present Distance	This command sets the label stop position past the start of print. When the next label format is received, the printer will automatically backfeed to the start position. If the present distance is set to zero, the printer will operate without reversing.
PJ	Present Adjust Fine Tune	This command fine-tunes the Present Distance setting in dots to compensate for slight mechanical differences sometimes evident if multiple printers share label formats.
PM	Pause Mode	See <STX>J for command details.
pS	Print Speed	See command Pa (Print Speed Mnemonic Table) for details.
Q	Set Quantity of Labels to Print	This command sets the number of the label copies to be printed. A one to five digit value is allowed, if the command is delimited by a carriage return <CR>. This permits host applications to generate label quantity commands without the need to pad leading zeros. (A four-digit command value does not need to be <CR> terminated.)
Q/q	UCC/EAN Code 128 Bar Code	Label Format Bar Code ID to print a UCC/EAN Code 128 Bar Code with (Q) or without (q) Human Readable
QQ	Query Configuration	This command requires a parameter of either K or Q.
R	Set Row Offset Amount	This command allows vertical adjustment of the point where printing begins. The printer is instructed to print label formats nnnn units above the position that the format specifies. This feature is useful when a single format is to be printed on labels containing preprinted information.
r	Recall Stored Label Format	This command is used to retrieve label formats stored on a memory module.

Syntax	Commands	Description
R/r	UCC/EAN Code128 K-MART NON EDI Bar Code	Label Format Bar Code ID to print an UCC/EAN Code128 K-MART NON EDI Bar Code with (R) or without (r) Human Readable text
RF	Row Adjust Fine Tune	This command shifts the vertical start of print position in dots upward or downward.
RO	Row Offset	See Rnnnn for command details. DPL only parameter.
S	Set Feed Speed	This command controls the rate at which the label is moved through non-printed areas. The setting remains unchanged unless another feed speed command is received or until the printer is reset.
s	Store Label Format in Module	This command stores a label format to a specified module as a .dlb file. Supplying the module name will store the label to that module; otherwise, using C will cause the label format to be stored in the selected default module (see <STX>X). In addition, this command terminates the Label Formatting Command.
S/s	UCC/EAN Code 128 Random Weight Bar Code	Label Format Bar Code ID to print an UCC/EAN Code 128 Random Weight Bar Code with (S) or without (s) Human Readable text
SA	SOP Adjust	This command shifts the vertical start of print position in dots upward or downward.
SL	Stop Location	This command sets the label stopping (and in certain cases the starting) location.
SM	Maximum Length Ignore	This command controls recognition of the <STX>M command.
SOH #	Reset	Returns all settings to last-saved settings, purges all current print jobs and clears both the communications and print buffers. Also clears DRAM memory. This command does not cause the printer to restart.
SOH *	Reset	This command forces a soft reset of the microprocessor. The printer is initialized to the same state as a power cycle.

Syntax	Commands	Description
SOH A	Send ASCII Status String	This command allows the host computer to check the current printer status. The printer returns a string of eight characters, followed by a carriage return. Each character (see below) indicates an associated condition, either true (Y) or false (N). Byte 1 is transmitted first. See <SOH>F for alternative response.
SOH a	Send ASCII Extended Status String	This command allows the host computer to check an extended current printer status. The printer returns a string of seventeen characters, followed by a carriage return. Most characters (see below) indicate an associated condition, either true (Y) or false (N). Byte 1 is transmitted first.
SOH B	Toggle Pause	This command toggles the printer's paused state between "On" and "Off." (This is the same function achieved by pressing the PAUSE Key.)
SOH C	Stop/Cancel	This command performs the cancel print job function (i.e., it clears the current format from the print buffer, pauses the printer, and illuminates the Paused/Stop Indicator). (The pause condition is removed as described under <SOH>B.)
SOH E	Send Batch Remaining Quantity	This command returns a four or five digit number indicating the quantity of labels that remain to be printed in the current batch, followed by a carriage return.
SOH e	Send Batch Printed Quantity	This command causes the printer to return a 5-digit number indicating the quantity of labels that have been printed in the current batch, followed by a carriage return.
SOH F	Send Status Byte	This command instructs the printer to send a single status byte where each bit (1 or 0) represents one of the printer's status flags, followed by a carriage return (see below). If an option is unavailable for the printer, the single bit will always be zero. See <SOH>A.
ST	Sensor Type	Sets sensor type.
STX a	Enable Feedback Characters	Enables the feedback of hex data characters to be returned from the printer following specific events during data parsing and printing.

Syntax	Commands	Description
STX c	Set Continuous Paper Length	This command sets the label size for applications to using continuous media. It disables the top-of-form function performed by the Media Sensor. The sensor, however, continues to monitor paper-out conditions.
STX E	Set Quantity for Stored Label	This command sets the number of labels for printing using the format currently in the print buffer. (The printer automatically stores the most recent format received in the buffer until the printer is reset or power is removed.) When used in conjunction with the <STX>G command, this will print the format.
STX e	Select Edge Sensor	This command enables the transmissive (see-through) sensing for top-of-form detection of die-cut and holed (notched) media.
STX F	Form Feed	This commands the printer to form feed to the next start of print.
STX G	Print Last Label Format	This command prints a previously formatted label and restarts a canceled batch job following the last processed label. This is used when there is a label format in the buffer.
STX I	Input Image Data	This command downloads images to the printer. The data that immediately follows the command string will be image data.
STX i	Scalable Font Downloading	The command to download TrueType (.TTF) scalable fonts to the printer.
STX J	Set Pause for Each Label	This command causes the printer to pause after printing each label. It is intended for use with the peel mechanism or tear bar when the Present Sensor option is not installed.
STX k	Test Communication Port	This command instructs the printer to transmit the Y character from the printer's port that received this command. (Failure to receive Y could indicate an interfacing problem.)

Syntax	Commands	Description
STX Kc	Configuration Set	This command specifies the Power-up Configuration parameter values for the printer and is equivalent to using other system commands followed by the <SOH>U. This command is intended for easily configuring a custom setup, but NOT for dynamic configuration changes. Configuration commands are examined for differences relative to the current configuration, and have no impact when no differences exist. Printers will reset upon completion of a command stream containing parameter value changes. In any case, no commands should be sent to the printer until this reset is complete. Other command highlights include the following
STX KC	Get Configuration	This command returns the configuration of the printer. The form of the returned data is similar to that of a printed Configuration Label. This command should be parsed by KEYWORDS, not character positions. Each line is terminated by a CR (0x0d) & LF (0x0a).
STX KE	Character Encoding	This command is provided primarily as a means for users of 7-bit communication and to embed control characters and extended ASCII characters in their data streams. Any character in the DPL data stream may be substituted with a delimited two-character ASCII hexadecimal numeric equivalent. The command allows the delimiting character to be selected, and the encoding to be enabled or disabled. When character encoding is enabled, the printer will decode any ASCII hexadecimal numeric pairs following the delimiter as single-byte values. Character encoding is used where control characters cannot be transmitted or where control characters within data may prematurely terminate a label format record. Although the delimiter may be changed at any time (except within a label format definition), there cannot be more than one defined delimiter, and character encoding must be disabled with <STX>KEN prior to re-enabling regardless of any change in the delimiter.

Syntax	Commands	Description
STX L	Enter Label Formatting Command Mode	This command switches the printer to the Label Formatting Command Mode, where the printer expects to receive only Record Structures and Label Formatting Commands. Immediate, System-Level, and Font Loading commands will be ignored until the label formatting mode is terminated with E, s, or X, (see Label Formatting Commands for additional information).
STX M	Set Maximum Label Length	This command instructs the printer move media this distance in search of the top-of form (label edge, notch, black mark, etc.) before declaring a paper fault. A paper fault condition can occur if this setting is too close (within 0.1 inch [2.54 mm]) to the physical length of the label. Therefore, it is a good practice to set this command to 2.5 to 3 times the actual label length used. The minimum value should be at least 5" (127 mm).
STX m	Set Printer to Metric Mode	This command sets the printer to interpret measurements as metric values (e.g., <STX>c0100 will equal 10.0 mm). The default is Imperial (see <STX>n).
STX n	Set Printer to Imperial Mode	This command sets the printer to interpret measurements as inch values (e.g., <STX>c0100 will equal 1.00 inch), and is the default mode.
STX p	Controlled Pause	This command will cause the printer to pause only after all previously received commands are executed, often useful between label batches. (This command will not clear the pause condition; see <SOH>B).
STX Q	Clear All Modules	This command instructs the printer to clear all Flash and DRAM modules; see the printer manual for module options. All stored data will be erased.
STX q	Clear Module	This command clears the selected Flash or DRAM module. During normal operations if a module becomes corrupted (identifiable when the printer responds with a "No Modules Available" message to a <STX>W command) it must be cleared. All stored data will be destroyed.

Syntax	Commands	Description
STX r	Select Reflective Sensor	This command enables reflective (black mark) sensing for top-of-form detection of rolled butt-cut, and fan-fold or tag stocks with reflective marks on the underside. This Media Sensor will detect a minimum mark of 0.1 inches (2.54 mm) between labels (see the <i>Operator's Manual</i> for media requirements). The end of the black mark determines the top of form. Use the <STX>O command to adjust the print position.
STX S	Recall Global Data and Place in Field	This command, when in the format record data field, places data from a specified global register into the data field. See the G command.
STX S	Set Feed Speed	This command controls the output rate of the media when the FEED Key is pressed, or when feeding white space at the end of a label.
STX T	Print Time and Date	This command, using string characters and markers, allows time and date data to be selected and retrieved from the internal clock. In addition, the <STX>T may be preceded by data to be printed/encoded, and/or the string may be terminated by an <STX> command followed by more data then <CR> terminated. The string characters/markers are not printed; instead, the label will show the corresponding print value.
STX T	Print Quality Label	This command instructs the printer to produce a Print Quality label, a format comprised of different patterns and Bar Codes useful in printer setup. To capture all printed information, use the labels as wide as the maximum print width and at least four inches (102 mm) long.
STX t	Test DRAM Memory Module	This command is to perform a system DRAM Module memory test.
STX U	Label Format String Replacement Field	This command places new label data into format fields to build a label. Two options are available: Exact Length and Truncated Length.
STX v	Request Firmware Version	This command causes the printer to send its version string (same as printed on the configuration label). The version may be different from printer to printer.
STX W	Request Memory Module Information	This command requests a memory module directory listing. Results may vary depending on printer class, model, or firmware version.

Syntax	Commands	Description
STX w	Test Flash Memory Module	This command is to performs a system Flash Memory test.
STX X	Set Default Module	This command, typically used prior to the loading of HP/PCL-4 formatted bitmapped fonts (see Font Loading Commands), is designed to allow the user to select between modules when downloading information.
STX x	Delete File from Module	This command removes a specific file from the specified module. The file name is removed from the module directory and thus the file cannot be accessed.
STX y	Select Font Symbol Set	This command selects the scalable font symbol set. The selected symbol set remains active until another symbol set is selected. Option dependent and not all symbol sets can be used with all fonts. See "Symbol Sets" specification section for complete list of "Single Byte Sets" and "Double Byte Sets".
STX Z	Print Configuration Label	This command causes the printer to produce a Database Configuration Label. To capture all printed information, use the labels as wide as the maximum print width and at least four inches (102 mm) long.
STX z	Pack Module	This command is performs a memory module compression. DO Legacy only. Not required for A,H,M, I and E Class or Honeywell base printers.
T	Telepen	
T	Set Field Data Line Terminator	This command, intended for use with record types that accept binary data (e.g., PDF417), allows binary control codes (e.g., a carriage return) to be embedded in the printed data by setting an alternate data line terminator. Valid only for the next format record, the terminator then defaults back to the carriage return.
TP	TOF Precedence	This command instructs the firmware to stop printing at the first top of form mark it detects. The default ("No") prints all of the data (traversing the top of form as necessary) then slews to the next TOF.

Syntax	Commands	Description
U	Mark Previous Field as a String Replacement Field	This command controls the formatting of replacement data. Specifying a field as a string replacement for dynamic, not static, fields will optimize throughput. See <STX>U.
u	UPS MaxiCode, Modes 2 & 3 Bar Code	Label Format Bar Code ID(u) to print a UPS MaxiCode, Modes 2 & 3.
U	UPS MaxiCode, Modes 2 & 3 Bar Code with Byte Count Specifier	Label Format Bar Code ID (U) to print a UPS Maxicode, Modes 2 & 3. This ID allows users to specify the number of data byte to be in the bar code. This allows for special control codes like cr's to be included in the data.
UM	Unit of Measure	See <STX>m (metric) or <STX>n (imperial) for command details.
v	FIM	
W1c	DataMatrix Bar Code	Label Format Bar Code ID (W1c) to print a DataMatrix Bar Code.
W1C	DataMatrix Bar Code with Byte Count Specifier	Label Format Bar Code ID (W1C) to print a DataMatrix Bar Code. This ID allows users to specify the number of data byte to be in the Bar Code. This allows for data.values 0x00 through 0xFF to be included within the data strings without conflicting with the DPL format record terminators.
W1d/W1D	QR Code Bar Code	Label Format Bar Code ID's for printing a QR Code bar code in Auto Format (d) or Manual Format (D) modes.
W1f/W1F	Aztec Bar Code	Label Format Bar Code ID's for printing an Aztec bar code in variable and fixed length modes.
W1I	EAN128 Bar Code (with Auto Subset Switching)	Label Format Bar Code ID (W1I) to print EAN128 (with Auto Subset Switching and Human Readable text).
W1J	Code 128 Bar Code (with Auto Subset Switching)	Label Format Bar Code ID (W1J) to print a Code 128 (with Auto Subset Switching)
W1k	GS1 DataBar Bar Code	Label Format Bar Code ID (W1k) to print GS1 DataBar Bar Code. Supports six types: GS1 DataBar, DataBar Truncated, DataBar Stacked, DataBar Stacked Omni-Directional, DataBar Limited, and DataBar Expanded.

Syntax	Commands	Description
W1L	Planet Code Bar Code	Label Format Bar Code ID (W1L) to print a Planet Code Bar Code.
W1m/W1M	Australia Post 4-State Bar Code	Label Format Bar Code ID to print Bar Code in the Australia Post System.
W1p	Intelligent Mail Bar Code (IMB)	Label Format Bar Code ID (W1p) to print an Intelligent Mail Bar Code (IMB).
W1t	TCIF Linked 3 of 9 (TLC39)	
W1z	MicroPDF417 Bar Code	Label format Bar Code ID (W1z) to print a MicroPDF417 Bar Code. MicroPDF417 is a 2 dimensional Bar Code capable of holding large amounts of data in a small area. It provides a high level of redundancy and error checking.
W1Z	Micro PDF417 Bar Code with Byte Count Specifier	Label format Bar Code ID (W1Z) to print a MicroPDF417 Bar Code. MicroPDF417 is a 2 dimensional Bar Code capable of holding large amounts of data in a small area. It provides a high level of redundancy and error checking. The Byte Count specifier allows for data values 0x00 through 0xFF to be included within the data strings without conflicting with the DPL format record terminators.
X	Terminate Label Formatting Mode	This command causes the printer, when in label formatting mode, to immediately switch to the system command mode and generate a label format based on the data received at that point. However, unlike the "E" command, it will not print a label. (Other termination commands are the "E" and "s".)
y	Select Font Symbol Set	This command, like the <STX>y, selects the scalable font symbol set. The selected symbol set remains active until another symbol set is selected. See "Symbol Sets" specification section for complete list of "Single Byte Sets" and "Double Byte Sets".
z	Zero (Ø) Conversion to "0"	This command removes the slash zero in fonts 0 to 8, and in the human readable field (if any) of the Bar Codes A to Z. The command applies only to format records containing those fonts and Bar Codes, and is effective only for the label format in which it appears.

Syntax	Commands	Description
Z	PDF-417 Bar Code with Byte Count Specifier	Label Format Bar Code ID (Z) to print a PDF-417 Bar Code. This ID allows users to specify the number of data byte to be in the Bar Code. This allows for data.values 0x00 through 0xFF to be included within the data strings without conflicting with the DPL format record terminators.
z	PDF-417 Bar Code	Label Format Bar Code ID (z) to print a PDF-417 Bar Code.

Immediate Commands

Immediate commands (listed below) are high-priority commands and will be executed in front of any other commands currently in the command processing queue.

- SOH # Reset
- SOH * Reset
- SOH A Send ASCII Status String
- SOH a Send ASCII Extended Status String
- SOH B Toggle Pause
- SOH C Stop/Cancel
- SOH E Send Batch Remaining Quantity
- SOH e Send Batch Printed Quantity
- SOH F Send Status Byte

System Level Commands

System-Level Commands (listed below) are used for print control as well as loading and storing fonts and graphic information. These commands can be used to override any default configuration parameter values and may be used anywhere outside the Label Formatting Command data.

- STX a Enable Feedback Characters
- STX c Set Continuous Paper Length
- STX E Set Quantity for Stored Label
- STX e Select Edge Sensor
- STX F Form Feed
- STX G Print Last Label Format
- STX I Input Image Data
- STX i Scalable Font Downloading
- STX J Set Pause for Each Label
- STX k Test Communication Port
- STX L Enter Label Formatting Command Mode
- STX m Set Printer to Metric Mode
- STX n Set Printer to Imperial Mode
- STX p Controlled Pause
- STX Q Clear All Modules
- STX q Clear Module
- STX r Select Reflective Sensor
- STX S Set Feed Speed
- STX T Print Quality Label
- STX t Test DRAM Memory Module
- STX U Label Format String Replacement Field
- STX v Request Firmware Version
- STX W Request Memory Module Information
- STX Z Print Configuration Label
- STX z Pack Module

Label Format Commands

Label Formatting Commands (see links below) control print operations within the System <STX>L (start label format) command. They override the System Commands as well as any default database parameter values.

- [Label Formatting Commands](#)
- [Format Record Commands](#)
- [Bar Code](#)

Label Formatting Commands

The <STX>L command switches the printer from the System-Level Processor to the Label Formatting Processor. All commands following the <STX>L are interpreted as label formatting commands, and can be used to override default parameter values. Selectable parameter value defaults may be also reassigned via the Setup Menu, as defined in the corresponding Operator's Manual. Label formats that contain no commands overriding printer default values will assume those defaults.

- [A Set Format Attribute](#)
- [B Bar Code Magnification](#)
- [C Set Column Offset Amount](#)
- [D Set Dot Size Width and Height](#)
- [E Terminate Label Formatting Mode and Print Label](#)
- [e Recall Printer Configuration](#)
- [F Advanced Format Attributes](#)
- [G Place Data in Global Register](#)
- [H Enter Heat Setting](#)
- [J Justification](#)
- [M Select Mirror Mode](#)
- [m Set Metric Mode](#)
- [n Set Inch \(Imperial\) Mode](#)
- [P Set Print Speed](#)
- [Q Set Quantity of Labels to Print](#)
- [R Set Row Offset Amount](#)
- [r Recall Stored Label Format](#)
- [s Store Label Format in Module](#)
- [T Set Field Data Line Terminator](#)
- [U Mark Previous Field as a String Replacement Field](#)
- [X Terminate Label Formatting Mode](#)
- [y Select Font Symbol Set](#)
- [z Zero \(Ø\) Conversion to "0"](#)
- [+ | > | \(Make Last Field entered an Increment Field](#)
- [– | < | \) Make Last Field entered a Decrement Field](#)
- [STX S Recall Global Data and Place in Field](#)

- [STX T Print Time and Date](#)
- [^ Set Count by Amount](#)

Format Record Commands

Format Records are data strings containing the data to be printed on the label(s) preceded by instructions for how it is to be printed. These records are the building blocks of label formats. Each record is made up of three parts:

1. A header
2. Data to be printed
3. An end-of-field termination character

There are six field types:

1. Internal bitmap fonts
2. Smooth fonts
3. Scalable fonts
4. Bar codes
5. Images
6. Graphics (lines, boxes, etc.)

See [Format Record Structure](#) for definitions of how these records are constructed for each of the six field types.

- [Internal Bitmapped Font](#)
- [Smooth/Downloaded Bitmapped Fonts](#)
- [Scalable Fonts](#)
- [Images](#)
- [Lines and Boxes](#)
- [Polygons](#)
- [Circles](#)

Bar Code

Bar Code Format Record commands (listed below) consist of all the data used to specify which bar code is to be formatted and the data to be encoded or printed. The Bar Code IDs in the data have an alpha designator. Uppercase designators print bar codes with human-readable interpretations, if supported; lowercase specifies bar codes without. Place the ID in field b of the Format Record header to cause the printer to encode the data field using the associated symbology.

- Bar Code Format Record Structure
- Bar Code Summary Data
- Bar Code Default Widths and Heights
- A/a Code 3 of 9 Bar Code
- B/b UPC-A Bar Code
- C/c UPC-E Bar Code
- D/d Interleaved 2 of 5 (I 2 of 5) Bar Code
- E/e Code 128 Bar Code
- F/f EAN-13 Bar Code
- G/g EAN-8 Bar Code
- H/h Health Industry Bar Code (HIBC)
- I/i Codabar Bar Code
- J/j Interleaved 2 of 5 (with a Modulo 10 Checksum) Bar Code
- L/l Interleaved 2 of 5 (with a Modulo 10 Checksum and Bearer Bars) Bar Code
- M/m 2-Digit UPC Addendum Bar Code
- N/n 5-Digit UPC Addendum Bar Code
- O/o Code 93 Bar Code
- p Postnet Bar Code
- Q/q UCC/EAN Code 128 Bar Code
- R/r UCC/EAN Code128 K-MART NON EDI Bar Code
- S/s UCC/EAN Code 128 Random Weight Bar Code
- u UPS MaxiCode, Modes 2 & 3 Bar Code
- U UPS MaxiCode, Modes 2 & 3 Bar Code with Byte Count Specifier
- Z PDF-417 Bar Code with Byte Count Specifier
- z PDF-417 Bar Code
- W1c DataMatrix Bar Code
- W1C DataMatrix Bar Code with Byte Count Specifier
- W1d / W1D QR Code Bar Code
- W1f / W1F Aztec Bar Code
- W1I EAN128 Bar Code (with Auto Subset Switching)
- W1J Code 128 Bar Code (with Auto Subset Switching)
- W1k GS1 DataBar Bar Code
- W1k GS1 DataBar Undercut

- W1L Planet Code Bar Code
- W1N-W1n Industrial 2 of 5 Barcode
- W1p Intelligent Mail Bar Code (IMB)
- W1s-W1S Standard 2 of 5 Barcode
- W1Y-W1y Code 16K Barcode
- W1z MicroPDF417 Bar Code
- W1Z Micro PDF417 Bar Code with Byte Count Specifier

Font Loading Commands

These commands are utilized to send bitmap fonts to the printer. The assigned font ID number command must be sent to the printer before the font file. All Font Loading Commands begin with <ESC> (ASCII control character 27 [decimal]). The downloaded font will be stored in the default module (refer to the <STX>X command) as file type .dbm. The commands in the table below are listed in their order of appearance, top to bottom, during font downloading. The <SOH>D command must be sent prior to downloading a font.

- *c###D Assign Font ID Number
-)s###W Font Descriptor
- *c###E Character Code
- (s#W Character Download Data

Extended System Level Commands

Extended System-Level Commands are extensions to the System-Level Commands and provide an extra level of printer control, some of which can be used to set the printer's default database values.

Note: Unlike Datamax-O'Neil printers, these commands are retained on power-cycling the printer.

- [STX KC Get Configuration](#)
- [STX KE Character Encoding](#)
- [STX Kf Set Present Distance](#)
- [STX KH Dot Check](#)
- [STX Kr Resettable Counter Reset](#)

Configuration Commands

This command specifies the Power-up Configuration parameter values for the printer and is equivalent to using other system commands followed by the <SOH>U. **This command is intended for easily configuring a custom setup, but NOT for dynamic configuration changes.** Configuration commands are examined for differences relative to the current configuration, and have no impact when no differences exist. Other command highlights include the following:

Note: *Printers will reset upon completion of a command stream containing parameter value changes. No commands should be sent to the printer until this reset is complete.*

- These parameter values are equivalent to changing the respective menu settings and do not affect the factory default settings of the printer.
- If separated by a semi-colon (;), multiple parameter values may be sent in a single command stream; see sample below.
- All values are stored in Flash memory and remain in effect until new values are received or until factory defaults are restored.
- If system commands are sent that override the Power-up Configuration value(s), the Power-up Configuration value(s) will be restored the next time the printer is powered "On" or is reset.
- These parameters are the same as those found in the Menu System (display equipped models). The respective functions are documented in the appropriate Operator's Manual. Not all commands are effective on all printers.

Syntax

<STX>Kcaa1val1[;aalvall][;aanvaln]<CR>

Parameters

Where:

- aa1, aal, aan - Are two letter parameter names.
- val1, vall, valn - Are parameter values, with ranges appropriate for the associated parameter.

Sample

<STX>KcPA120;CL600;STC

Result

The sample above sets the Present Adjust to 120 dots, and the Sensor Type to Continuous with a label length of six inches.

- AS Single Byte Symbol Set
- AV Avalanche
- BP British Pound
- CC Control Codes
- CF Column Adjust Fine Tune
- CH Comm Heat Commands
- CL Continuous Label Length
- CO Column Offset
- CS Comm Speed Commands
- CT Comm TOF Commands
- DK Darkness
- DM Default Module
- DS Double Byte Symbol Set
- DU Display Units
- EC Column Emulation
- EM Input Mode
- EN End Character
- ER Row Emulation
- ES ESC Sequences
- FA Format Attributes
- FH Fault Handling
- FM Feedback Mode
- HC Head Cleaning
- HE Heat
- IC Ignore Control Codes
- IP Process SOH (Data)
- LM Label Store
- LR Label Rotation
- LS Language Select
- LW Label Width
- MT Media Type
- NS Disable Symbol Set Selection
- PC Print Contrast

- PD Present Distance
- PE Peel Mode
- PM Pause Mode
- pS Print Speed
- QQ Query Configuration
- RF Row Adjust Fine Tune
- RL Ribbon Low Diameter
- RO Row Offset
- SF Save As Filename
- SL Stop Location
- SM Maximum Length Ignore
- SP Serial Port
- ST Sensor Type
- TP TOF Precedence
- UM Unit of Measure

COMMANDS

See [Commands Listed by Name](#) or [Commands Listed by Syntax](#)

- |< |) Make Last Field entered a Decrement Field

This command is used to print sequenced labels. It causes the printer to automatically decrement a field in a batch of labels. The numeric data in the field will decrement by the value assigned after the minus (-) sign each time a label is produced [or the less than character [<] can be substituted to make the field decrement alphabetically, or the right parenthesis [)] can be substituted to make the field decrement hexadecimal data (valid hexadecimal data is 0-9 or A-F, usually in pairs)]. This command is effective only on the label format record that it follows, and is intended to be used with the Q, <STX>E or <STX>G commands.

Syntax

*pii

Parameters

Where:

- - Is "-" for numeric decrement, "<" for alphanumeric decrement, or ")" for hexadecimal decrement.
- p - Is the fill character for the left-hand character of the field.
- ii - Is a mask for the amount by which to decrement the field.

Sample

```
<STX>L
1322000000000000123AB
<01
Q0003
E
```

Result

The sample above will generate a single field label format that prints the initial label with a value of 123AB, and then decrements that number by one for the next two labels.

Embedding

Numeric strings for decrementing may also be embedded between alphabetic characters (e.g., when systems require alphanumeric bar codes with alphabetic prefixes or suffixes).

```
<STX>L
16110000001000101000CD
100
Q0003
E
```


Result

The sample above will print three labels: 1000CD, 999CD, and 998CD. Note that the pad character is a placeholder for digits removed from the left side in the subtraction process. When a fixed pitch font is used, the justification of the rightmost character is sustained regardless of the number of digits replaced by the pad character on the left side.

(s#W Character Download Data

This command contains all of the information for one downloaded character.

Syntax

<ESC>(s###Wnn...n

Parameters

Where:

- ### - Is the number of bytes of bitmapped data, three digits maximum, from 1 to 999.
- nn...n - Is the bitmapped data.

)s####W Font Descriptor

This command (typically first data in a font file) contains all of the information about the font contained in the file. Different font generation software will create different length header information, but the initial 64 bytes will remain consistent with the PCL-4 (HP LaserJet II) format.

Syntax

<ESC>)s####Wddd...d

Parameters

Where:

- ### - Is the number of bytes of font descriptor data from 1 to 3 ASCII decimal digits.
- dd...d - Is the descriptor.

^ Set Count by Amount

This command allows applications using the increment / decrement field command to print more than one label with the same field value before the field data is updated. The default is 1.

Syntax

`^nn`

Parameters

Where:

- ^ - 0x5E or 0x40 if using Alternate or Alternate 2 Control Codes.
- nn - Is a two-digit value that specifies the number of labels to be generated before incrementing (or decrementing) the field value.

Behavior

This command can only be issued once per label format. In addition, when alternate Control Codes are enabled, the ^ character must be replaced by the @ character (hexadecimal 0x40); see Control Code Command Functions.

Sample

```
<STX>L  
132200000000000012345  
-01  
^02  
Q0006  
E
```

Result

The sample above prints two labels containing the same field value before decrementing the field. Six labels are printed.

***c###D Assign Font ID Number**

This command is the first command required for downloading a font to either RAM or Flash Memory modules. ESC represents the ASCII control character 27.

Syntax

<ESC>*c###D

Parameters

Where:

- ### - Is the font ID numbers 100-999 (000 – 099 are reserved for resident fonts).

***c###E Character Code**

This code is the ASCII decimal value corresponding to the next downloaded character.

Syntax

<ESC>*c###E

Parameters

Where:

- ### - Is the ASCII value of the character, three digits maximum, 0 to 999.

+ | > | (Make Last Field entered an Increment Field

This command is used to print sequenced labels. It causes the printer to automatically increment a field in a batch of labels. The numeric data in the field will increment by the value assigned after the plus sign (+) each time a label is produced [or the greater than symbol [>] can be substituted to make the field increment alphabetically, or the left parenthesis [(] can be substituted to make the field increment hexadecimal data (valid hexadecimal data is 0-9 or A-F, usually in pairs)]. This command is effective only on the label format record that it follows, and is intended to be used with the Q, <STX>E, or <STX>G commands.

Syntax

*pii

Parameters

Where:

- * - Is "+" for numeric increment, ">" for alphanumeric increment, or "(" for hexadecimal increment.
- p - Is the fill character for the left-hand character of the field.
- ii - Is a mask for the amount by which to increment the field.

Sample

```
<STX>L  
132200000000000012345  
+01  
Q0003  
E
```

Result

The sample above will generate a single field label format that prints the initial label with a value of 12345, and then increments that number by one for the next two labels.

Embedding

Numeric strings for incrementing may also be embedded between alphabetic characters (e.g., when systems require alphanumeric bar codes with alphabetic prefixes or suffixes).

Sample

```
<STX>L  
1611000000100010AB0001CD  
+ 100  
Q0003  
E
```

Result

The sample above will print three labels, incrementing 0001 by 1 on each label with AB and CD remaining untouched: AB0001CD, AB0002CD, AB0003CD. Note that the increment value has one leading blank and two trailing zeros, while the blank is a pad character and the trailing zeroes are placeholders that leave CD unchanged.

A Set Format Attribute

This command specifies the type of format operation and remains in effect until another format command is specified or another label format has begun (<STX>L).

Syntax

An

Parameters

Where:

- n - Is attribute mode 1, 2, 3, or 5; see table below. The default is 1.

n	Attribute	Description
1	XOR Mode	In this mode, the region where text strings, images or bar codes intersect will not be printed. (An odd number of overlapping objects will print.)
2	Transparent Mode	The intersecting regions of text strings, images, and bar codes will print, allowing the user to print fields atop one another.
3	Opaque Mode	Intersecting text is obliterated by the text formatted last. Each character cell is treated as opaque. This mode is effective only in rotation 1. See Record Structure
5	Inverse Mode	This mode allows inverse (white on black) printing (e.g., a proportionally sized border and background are printed similar to photographic negative). If text or image fields overlap in this mode, the effect will be similar to the XOR mode.

Sample

```
<STX>L
A3
141100001000100DATAMAX
141100001100110DATAMAX
E
```

Result

The sample above sets the printer to Opaque Mode and produces one label.

A/a Code 3 of 9 Bar Code

Label format bar code ID to print a 3 of 9 Bar Code with (A) or without (a) Human Readable text

Syntax

A or a

Parameters

Bar Size

Behavior

Valid Characters: 0-9, A-Z, - . * \$ / + % and the space character.

- Variable Length.
- Valid bar widths: The expected ratio of wide to narrow bars can range from 2:1 to 3:1.

Sample

```
<STX>L  
D11  
1A00000001501000123456789  
121100000000100Barcode A  
E
```

Result

Prints a 3 of 9 bar code with a wide to narrow bar ratio of 3:1.

AS Single Byte Symbol Set

This command allows for a default single-byte symbol set. DPL only parameter. Menu Display: "Single Byte Symbol Set"

Parameter	AS
Value / Range:	2 Byte Alpha Character
Units / Interpretation:	AA – ZZ, printer resident symbol set
Command Equivalent:	<STX>y, ySxx

B Bar Code Magnification

This command provides a mechanism to specify the bar code magnification.

Syntax

Bnn

Parameters

Where:

- nn - Is a two digit decimal number indicating the magnification value.

Sample

```
<STX>L
D11
B01
1a9305000100030ABCD
B03
1a3105000700030ABCD
Q0001
E
```

Result

The sample above instructs the printer to print two bar codes, each 9 dots by 3 dots. . The value is reset to 1 at the start of every label and stays active for the entire label or set to a new value.

B/b UPC-A Bar Code

Label format bar code ID to print a UPC-A Bar Code with (B) or without (b) Human Readable text.

Syntax

B or b

Parameters

Bar Size

Behavior

Valid Characters: 0-9

- Length: 12 digits. If the user provides 11 digits, the printer will compute the checksum.
- If the user provides the checksum, the printer will check that it matches the expected checksum. If it does not match, the printer will print out all zeros and the expected checksum.
- Valid bar widths: The fourth character of record is the width of the narrow bar in dots.
- All other bars are a ratio of the narrow bar (2 times, 3 times, and 4 times the narrow bar width).

Sample

```
<STX>L
D11
1B000000015010001234567890
121100000000100Barcode B
E
```

Result

Prints a UPC-A bar code.

BP British Pound

This command, when enabled, will automatically switch from the Number symbol (#) found at 0x23 (default PC-850 Multilingual Symbol Set) to\ the British Pound symbol (£) at 0x9C.

DPL only parameter. Menu Display: "Use British Lbs"

Parameter:	BP
Value / Range:	Y, N
Units / Interpretation:	Y = Enabled, N = Disabled
Command Equivalent:	N/A

C Set Column Offset Amount

This command allows horizontal adjustment of the point where printing begins. The printer is instructed to print label formats nnnn units to the right of the position that the format specifies. This feature is useful when a single format is to be printed on labels containing preprinted information.

Syntax

Cnnnn

Parameters

Where:

- nnnn - Is a four-digit number for the column offset, inches/100 or mm/10. The default is 0.

Sample

```
<STX>L  
C0050  
141100001000100DATAMAX
```

Result

The sample above shifts all format data 0.5 inches to the right, unless the printer is in metric mode, (see Label Formatting Command "m").

C/c UPC-E Bar Code

Label format bar code ID to print a UPC-E Bar Code with (C) or without (c) Human Readable text

Syntax

C or c

Parameters

Bar Size

Behavior

- Valid Characters: 0-9
- Length: Seven digits. If the user provides six digits, the printer will compute the checksum. If the user provides the checksum, the printer will check that it matches the expected checksum. If it does not match, the printer will print out all zeros and the expected checksum.
- Valid bar widths: The fourth character of record is the width of the narrow bar in dots.
- All other bars are a ratio of the narrow bar (2 times, 3 times, and 4 times the narrow bar width).

Sample

```
<STX>L  
D11  
1C0000000150100012345  
121100000000100Barcode C  
E
```

Result

Prints a UPC-E bar code.

CC Control Codes

This command, depending upon printer type, allows a change to the prefix of the software commands interpreted by the printer.

DPL Menu Display "Control Code Sets".

Note: There will be no reset after the command, which is different from Datamax-O'Neil DPL printers.

Parameter:	CC
Value / Range:	S,1, 2
Units / Interpretation:	S = Standard,1 = Alternate,2 = Alternate-2
Command Equivalent:	N/A

CF Column Adjust Fine Tune

This command fine-tunes the Column Offset setting by shifting both the horizontal start of print position and the Label Width termination point to the right in dots to compensate for slight mechanical differences sometimes evident when multiple printers share label formats.

Parameter:	CF
Value / Range:	+ / – dots
Units / Interpretation:	Resolution specific
Command Equivalent:	N/A

CH Comm Heat Commands

This command causes the printer to ignore DPL Heat commands. Ignore by setting value to N. Process by setting value to Y (default). When set to ignore Heat commands values are controlled via the menu setting.

Parameter:	CH
Value / Range:	Y, N or 1, 0
Units / Interpretation:	Y = Enabled, N = Disabled; or 1 = Enabled, 0 = Disabled
Command Equivalent:	N/A

CL Continuous Label Length

See <STX>c for command details.

Parameter:	CL
Value / Range:	0 -9999
Units / Interpretation:	1/100 in. or 1/10 mm
Command Equivalent:	<STX>c

If the length value is 1 through 20, Media Type will be set to "Continuous Var Len" and the Label Length will not be changed. In order to be compatible with Datamax-O'Neil printers, the operator will need to have Label Length set larger than the maximum image size being printed prior to setting "Continuous Var Len" mode, otherwise the label will be clipped. Label length value larger than 20 will not affect Media Type and in GAP mode it will only affect the distance used to seek end of the label.

CO Column Offset

See Cnnnn for command details.

Parameter:	CO
Value / Range:	0 -9999
Units / Interpretation:	1/100 in or 1/10 mm;
Command Equivalent:	Cnnnn

Note: *In Honeywell printers, this setting distance reduces Label Width in database, not expected by Datamax-O'Neil users.*

CS Comm Speed Commands

This command causes the printer to ignore DPL speed commands. Ignore by setting value to N. Process by setting value to Y (default). When set to ignore speed values are controlled via the menu setting.

Parameter:	CS
Value / Range:	Y, N or 1, 0
Units / Interpretation:	Y = Enabled, N = Disabled; or 1 = Enabled, 0 = Disabled
Command Equivalent:	N/A

CT Comm TOF Commands

This command causes the printer to ignore DPL TOF (Gap, Continuous, and Reflective) commands. Ignore by setting value to N. Process by setting value to Y (default). When set to DPL TOF values are controlled via the menu setting.

Parameter:	CT
Value / Range:	Y, N
Units / Interpretation:	Y = Enabled, N = Disabled
Command Equivalent:	N/A

D Set Dot Size Width and Height

This command is used to change the size of a printed dot, hence the print resolution - dots per inch (DPI) of the print head. By changing the height of a dot, the maximum length of a label can be increased or decreased.

Syntax

D<wh>

Parameters

Where:

- w - Is Dot Width multiplier 1 or 2.
- h - Is Dot Height multiplier 1, 2, or 3.

Limitations

D11 is the default value for 300, 400 and 600 DPI printer models, while D22 is the default value for all 203 DPI printer models.

D/d Interleaved 2 of 5 (I 2 of 5) Bar Code

Label format bar code ID to print an Interleaved 2 of 5 (I 2 of 5) bar code with (D) or without (d) human readable text

Syntax

D or d

Parameters

Bar Size

Behavior

- Valid Characters: 0-9
- Variable Length.
- Valid bar widths: The expected ratio of wide to narrow bars can range from 2:1 to 3:1.

Sample

```
<STX>L
D11
1D0000000015010001234567890
1211000000000100Barcode D
E
```

Result

Prints an Interleaved 2 of 5 bar code with a wide to narrow bar ratio of 3:1.

DK Darkness

This command adjusts the length of the print head strobe to fine tune the HEAT setting. (Linear mapping Default: DPL 32 = Honeywell 0)

Parameter:	DK
Value / Range:	1 - 64
Units / Interpretation:	N/A
Notes:	<p>Honeywell printers use a different darkness settings range than Datamax-O'Neil printers.</p> <p>Datamax-O'Neil printers use a range from 1 to 64.</p> <p>Honeywell printers use an integer range from -10 to 10.</p> <p>To maintain compatibility with DPL data streams originally intended for use by Datamax-O'Neil printers, this command continues to use the Datamax-O'Neil range but sets the Honeywell darkness setting according to the table below:</p>

DPL	Honeywell printers
1-5	-10
6-11	-8
12-16	-6
17-22	-4
23-28	-2
29-34	0
35-40	2
41-45	4
46-51	6
52-57	8
58-64	10

DM Default Module

See <STX>X for command details.

Parameter:	DM
Value / Range:	A, B, D or G
Units / Interpretation:	Module Letter
Command Equivalent:	<STX>X

Note: *Does not need reset in Honeywell printers but it resets in Datamax-O'Neil DPL printers.*

DS Double Byte Symbol Set

See <STX>y or ySxx for command details.

Parameter:	DS
Value / Range:	2-Byte alpha character
Units / Interpretation:	AA to ZZ printer resident symbol set ID
Command Equivalent:	<STX>y,, ySxx

E Terminate Label Formatting Mode and Print Label

This command causes the printer, when the processing Label Formatting commands, to terminate the Label Formatting Mode then generate, print, and feed a label. The label generated will be based on whatever data has been received to that point, even if no printable data has been received. (Other termination commands are "X" and "s".) Commands sent to the printer after the Terminate Label command must be of the Immediate, System-Level, or Font Download type.

Syntax

E

Sample

```
<STX>L  
1211000000000000Testing  
E
```

Result

The sample above will print one label.

E/e Code 128 Bar Code

Label format bar code ID to print a Code 128 bar code with (E) or without (e) human readable text

Syntax

E or e

Parameters

Bar Size

Behavior

- Valid Characters: The entire 128 ASCII character set.
- Variable Length
- Valid bar widths: The fourth character of record is the width of the narrow bar in dots.
- All other bars are a ratio of the narrow bar (2 times the narrow bar width, 3 times the narrow bar width, and 4 times the narrow bar width).
- This printer supports the Code 128 subsets A, B, and C. The printer can be selected to start on any code subset and switch to another within the data stream. The default code subset is B; otherwise, the first character (A, B, C) of the data field determines the subset. Subset switching is only performed in response to code switch command. These commands are placed in the data to be encoded at appropriate locations.

Subset A: Includes all of the standard uppercase alphanumeric keyboard characters plus the control and special characters. To select Code 128 Subset A, place an ASCII A (DEC 65, HEX 41) before the data to be encoded.

Subset B: Includes all of the standard uppercase alphanumeric keyboard characters plus the lowercase alphabetic and special characters. To select Code 128 Subset B, place an ASCII B (DEC 66, HEX 42) before the data to be encoded. If no start character is sent for the Code 128 font, Code 128 Subset B will be selected by default.

Subset C: Includes the set of 100 digit pairs from 00 through 99 inclusive, as well as special characters. Code 128 Subset C is used for double density encoding of numeric data. To select Code 128 Subset C, place an ASCII C (DEC 67, HEX 43) before the data to be encoded. Subset C can only encode an even number of numeric characters. When the data to be encoded includes an odd number of numeric characters, the last character causes the printer to automatically generate a "switch to subset B" and encode the last character appropriately in subset B.

Special Character Handling: Characters with an ASCII value greater than 95 are considered special characters. To access these values, a two-character reference table is built into the printer (see below).

For example, to encode FNC2 into a Code 128 Subset A bar code, send the ASCII "&" (DEC 38, HEX 26) followed by the ASCII "B" (DEC 66, HEX 41).

ASCII	2 CHAR	CODE A	CODE B	CODE C
96	&A	FNC3	FNC3	-NA-
97	&B	FNC2	FNC2	-NA-
98	&C	SHIFT	SHIFT	-NA-
99	&D	CODEC	CODEC	-NA-
100	&E	CODEB	FNC4	CODEB
101	&F	FNC4	CODEA	CODEA
102	&G	FNC1	FNC1	FNC1

Control Codes: By sending these control codes, control characters can be encoded into a Code 128 Subset A bar code (e.g., ABC{DE will be encoded as ABC<ESC>DE):

Control Code in the Bar Code Data Stream	Encoded Control Character Result
`	NUL
a through z	1 - 26
{	ESC
	FS
}	GS
~	RS
ASCII 127	US

Sample

```
<STX>L
D11
1E000000015010001234567890
121100000000100Barcode E
E
```

Result

Prints a Code 128 bar code.

ES ESC Sequences

This command allows data containing invalid ESC control code sequences to be processed (helpful because some systems send a "banner" to the printer). When set to "Disabled," ESC sequences are ignored and the data is processed. Bitmapped font downloads are disabled in this mode.

Parameter:	ES
Value / Range:	Y, N
Units / Interpretation:	Y = Enabled, N = Disabled
Command Equivalent:	N/A

F/f EAN-13 Bar Code

Label format bar code ID to print an EAN-13 bar code with (F) or without (f) human readable text

Syntax

F or f

Parameters

Bar Size

Behavior

- Valid Characters: 0-9
- Length: 13 digits. If the user provides 12 digits, the printer will compute the checksum.
- If the user provides the checksum, the printer will check that it matches the expected checksum. If it does not match, the printer will print all zeros and the expected checksum.
- Valid bar widths: The fourth character of record is the width of the narrow bar in dots. All other bars are a ratio of the narrow bar (2 times, 3 times, and 4 times the narrow bar width).

Sample

```
<STX>L  
D11  
1F00000000150100012345678901  
121100000000100Barcode F  
E
```

Result

Prints an EAN-13 bar code.

FA Format Attributes

See the "An" command for details.

Parameter:	FA
Value / Range:	X, O, T
Units / Interpretation:	X = XOR, O = Opaque, T = Transparent
Command Equivalent:	An

FM Feedback Mode

See <STX>a for command details.

Parameter:	FM
Value / Range:	Y, N
Units / Interpretation:	Y = Enabled, N = Disabled
Command Equivalent:	<STX>a

G Place Data in Global Register

The "G" command saves the print data of a print format record in a global register (temporary storage). This data may be retrieved and copied to another record in the same label format using the special Label Formatting Command: <STX>S. Global registers are named in the order received, beginning with Register A, ending at Register Z, and incrementing with each instance of the G command use.

Syntax

G

Sample

```
<STX>L
1211000000000000Testing
G
1A2210001000000<STX>SA
E
```

Result

The sample above stores, retrieves, and prints the data in global register A. One label is printed with "Testing" in two locations.

G/g EAN-8 Bar Code

Label Format Bar Code ID to print an EAN-8 bar code with (F) or without (f) human readable text

Syntax

G or g

Parameters

Bar Size

Behavior

- Valid Characters: 0-9
- Length: 8 digits. If the user provides 7 digits, the printer will compute the checksum. If the user provides the checksum, the printer will check that it matches the expected checksum. If it does not match, the printer will print all zeros and the expected checksum.
- Valid bar widths: The fourth character of record is the width of the narrow bar in dots.
- All other bars are a ratio of the narrow bar (2 times, 3 times, and 4 times the narrow bar width).

Sample

```
<STX>L  
D11  
1G00000001501000123456  
121100000000100Barcode G  
E
```

Result

Prints an EAN-8 bar code.

H Enter Heat Setting

This command changes the "on time" of elements of the print head. The default setting is 10 (except in the case of printers with a menu, where the default setting can be changed through the keypad). An increase or decrease in this value results in a change of heat applied by the print head to the media, lightening or darkening the print contrast accordingly. This is helpful when using different media types, each requiring a different amount of heat to properly image the media. The host device can send this command value to correct the heat setting per the application.

Syntax

Hnn

Parameters

Where:

- nn - Is a two-digit heat value (00-30).

Sample

```
<STX>L  
H15  
141100001000100SAMPLE LABEL  
E
```

Result

The sample above sets the printer for a heat value of 15 and prints one label.

H/h Health Industry Bar Code (HIBC)

Label Format Bar Code ID to print a Health Industry bar code (HIBC) with (H) or without (h) human readable text

Syntax

H or h

Parameters

Bar Size

Behavior

- Valid Characters: 0-9, A-Z, -\$ /. %
- Variable Length.
- Valid bar widths: The expected ratio of wide to narrow bars can range from 2:1 to 3:1.
- The host must supply leading "+"s

Sample

```
<STX>L
D11
1H0000000150050+0123456789
121100000000100Barcode H
E
```

Result

Prints a HIBC bar code with a wide to narrow bar ratio of 3:1.

HE Heat

See Hnn for command details.

Parameter:	HE
Value / Range:	0.0 – 30.0
Units / Interpretation:	N/A

Note: *Honeywell printers use a different heat settings range than Datamax-O'Neil printers.*

Datamax-O'Neil printers use a decimal range from 0.0 to 30.0.

Honeywell printers use an integer range from 0 to 100.

To maintain compatibility with DPL data streams originally intended for use by Datamax-O'Neil printers, this command continues to use the Datamax-O'Neil range but sets the Honeywell heat setting according to these formulas:

For incoming settings <23, it is multiplied by 3.3 to arrive at the new Honeywell heat setting.

For incoming settings >=23, the Honeywell heat setting is set to 100. The default heat setting for Honeywell printers is 56.

I/i Codabar Bar Code

Label Format Bar Code ID to print a Codabar Bar Code with (I) or without (i) Human Readable Text

Syntax

I or i

Parameters

Bar Size

Behavior

- Valid Characters: 0-9, A-D, -, ., \$,;, /, + (comma is not valid)
- Variable Length but requires at least three characters.
- Valid bar widths: The expected ratio of wide to narrow bars can range from 2:1 to 3:1.
- Valid Codabar symbols require start and stop characters (A–D). These characters should be placed in the data field along with other data to be included in the symbol.

Sample

```
<STX>L  
D11  
1I63040001501000A1234567890D  
121100000000100Barcode I  
E
```

Result

Prints a Codabar bar code with a wide to narrow bar ratio of 3:

IC Ignore Control Codes

This command allows the user to remove control codes (< 20 Hex) in the data field. The selected line terminator is processed. When enabled, DPL Control Code (SOH, STX, CR, ESC, and ^) characters are removed from the data string. (Note that some fonts do have printable characters in this range and they will not be printed when enabled.)

Parameter:	IC
Value / Range:	Y, N or 1, 0
Units / Interpretation:	Y = Enabled, N = Disabled; or 1 = Enabled, 0 = Disabled
Command Equivalent:	N/A

IE Ignore Distances

This command causes the printer to ignore DPL distance commands. Ignore by setting value to N. Process by setting value to Y (default). When set to ignore distance values are controlled via the menu setting.

Parameter:	IE
Value / Range:	Y, N or 1, 0
Units / Interpretation:	Y = Enabled, N = Disabled; or 1 = Enabled, 0 = Disabled
Command Equivalent:	N/A

IP Process SOH (Data)

Whether to allow SOH processing.

Parameter:	IP
Value / Range:	E, Y, D, N
Units / Interpretation:	Enable/Disable
Command Equivalent:	N/A

J Justification

This command changes the printing justification.

Syntax

Ja

Parameters

Where:

- a - Is a single-digit alpha character:
- L = left justified (default)
- R = right justified
- C = center justified

Sample

```
<STX>L
1911A1801001000TEST1
JR
1911A1801000100TEST2
JC
1911A1802000200TEST3
E
```

Result

The sample above prints "TEST1" one inch up and one inch over going right, "TEST2" one inch up and one inch over going left, and "TEST3" two inches up and over.

J/j Interleaved 2 of 5 (with a Modulo 10 Checksum) Bar Code

Label Format Bar Code ID to print an Interleaved 2 of 5 (with a Modulo 10 Checksum) with (J) or without (j) Human Readable text

Syntax

J or j

Parameters

Bar Size

Behavior

- Valid Characters: 0-9
- Variable Length.
- Valid bar widths: The expected ratio of wide to narrow bars can range from 2:1 to 3:1.

Sample

```
<STX>L
D11
1J0000000015010001234567890
1211000000000100Barcode J
E
```

Result

Prints an Interleaved 2 of 5 bar code with a modulo 10 checksum added and with a wide to narrow bar ratio of 3:1.

K Plessey

Syntax

N/A

Behavior

Valid Characters: 0-9

Valid bar widths: The expected ratio of wide to narrow bars can range from 2:1 to 3:1.

If a + character is the last data character, an additional MSI checksum will be added to the bar code in place of the + character.

Sample

```
<STX>L  
D11  
1K000000015010001234567890  
121100000000100Barcode K  
E
```

Result

Prints a Plessey bar code with a wide to narrow bar ratio of 3:1.

L/l Interleaved 2 of 5 (with a Modulo 10 Checksum and Bearer Bars) Bar Code

Label Format Bar Code ID to print an Interleaved 2 of 5 Bar Code (with a Modulo 10 Checksum and Bearer Bars) and with (L) or without (l) Human Readable text

Syntax

L or l

Parameters

Bar Size

Behavior

- Valid Characters: 0-9
- Variable Length: For the bearer bars to be printed, 13 characters are required.
- Valid bar widths: The expected ratio of wide to narrow bars can range from 2:1 to 3:1.

Sample

```
<STX>L  
D11  
1L00000001501000123456789012  
121100000000100Barcode L  
E
```

Result

Prints an Interleaved 2 of 5 bar code with a modulo 10 checksum with a wide to narrow bar ratio of 3:1 and bearer bars.

LM Label Store

This command selects the level of stored format recall to include the label-formatting command fields, or the label-formatting command fields and the printer state.

Parameter:	LM
Value / Range:	F, S
Units / Interpretation:	F = Fields, S = States & Fields
Command Equivalent:	N/A

LR Label Rotation

This command sets label rotation, allowing formats to be flipped 180 degrees. DPL Menu Display "Label Rotation"

Parameter:	LR
Value / Range:	Y, N
Units / Interpretation:	Y = Rotate 180, N = None
Command Equivalent:	N/A

LW Label Width

This command sets the maximum limit for the printable width. Objects extending beyond this limit will NOT print;

Parameter:	LW
Value / Range:	0075 – head width
Units / Interpretation:	1/100 in. or 1/10mm;
Command Equivalent:	<STX>KW

M Select Mirror Mode

This command instructs the printer to "mirror" all subsequent print field records, producing fields that are transposed visually.

Syntax

M

Behavior

Once set in a label format, Mirror Mode cannot be turned off until the end of the format

m Set Metric Mode

This command sets the printer to measure in metric. When this command is sent, all measurements will be interpreted as metric values, (e.g., a column offset of 0010 will be interpreted as 1.0 mm).

Syntax

m

Sample

```
<STX>L  
m  
141100001000100SAMPLE LABEL  
E
```

Result

The sample above prints the text (SAMPLE LABEL) starting at location coordinates 10.0 mm, 10.0 mm.

M/m 2-Digit UPC Addendum Bar Code

Label Format Bar Code ID to print a 2-Digit UPC Addendum Bar Code with (M) or without (m) Human Readable text

Syntax

M or m

Parameters

Bar Size

Behavior

- Valid Characters: 0-9
- Length: 2 digits.
- Valid bar widths: The fourth character of record is the width of the narrow bar in dots. All other bars are a ratio of the narrow bar (2 times, 3 times, and 4 times the narrow bar width). Human readable characters for this bar code symbology are printed above the symbol.

Sample

```
<STX>L  
D11  
1M000000015010042  
121100000000100Barcode M  
E
```

Result

Prints a 2 digit UPC bar code addendum.

ML Maximum Length

Distance printer moves paper before detecting TOF fault

See <STX>M for command details.

Parameter:	ML
Value / Range:	0 -9999
Units / Interpretation:	1/100 in. or 1/10 mm
Command Equivalent:	<STX>M

MT Media Type

This command selects the printing method: Direct Thermal for use with heat sensitive media or Thermal Transfer for use with media requiring a ribbon to create an image.

Parameter:	CL
Value / Range:	D, T
Units / Interpretation:	D = Direct, T = Thermal Transfer
Command Equivalent:	N/A

n Set Inch (Imperial) Mode

This command sets the printer to measure in inches. When this command is sent, all measurements will change to inches. Default mode, and is menu selectable.

Syntax

n

Sample

```
<STX>L  
n  
141100001000100SAMPLE LABEL  
E
```

Result

The sample above prints the text (SAMPLE LABEL) starting at location coordinates 1.0 inch, 1.0 inch.

N/n 5-Digit UPC Addendum Bar Code

Label Format Bar Code ID to print a 5-Digit UPC Addendum Bar Code with (N) or without (n) Human Readable text

Syntax

N or n

Parameters

Bar Size

Behavior

- Valid Characters: 0-9
- Length: 5 digits.
- Valid bar widths: The width multiplier is the width of the narrow bar in dots. All other bars are a ratio of the narrow bar (2 times, 3 times, and 4 times the narrow bar width). Human readable characters for this bar code symbology are printed above the symbol.

Sample

```
<STX>L  
D11  
1N000000015010001234  
121100000000100Barcode N  
E
```

Result

Prints a 5 digit UPC bar code addendum.

NS Disable Symbol Set Selection

This command set the printer to ignore any DPL symbol set selection commands

Parameter:	NS
Value / Range:	Y, N
Units / Interpretation:	Y = Enabled, N = Disabled
Command Equivalent:	N/A

O/o Code 93 Bar Code

Label Format Bar Code ID to print a Code 93 Bar Code with (O) or without (o) Human Readable text

Syntax

O or o

Parameters

Bar Size

Behavior

- Valid Characters: 0-9, A-Z, -.\$/+% and the space character.
- Variable Length.
- Valid bar widths: The width multiplier is the width of the narrow bar in dots. All other bars are a ratio of the narrow bar (2 times, 3 times, and 4 times the narrow bar width).

Sample

```
<STX>L
D11
100000000150100Datamax42
121100000000100Barcode O
E
```

Result

Prints a Code 93 bar code.

P Set Print Speed

This command sets a print speed for a label or batch of labels.

Syntax

Pa

Parameters

Where:

- a - Is a single character representing a speed.

Sample

```
<STX>L  
PC  
141100001000100LABEL1  
E  
<STX>L  
141100001000100LABEL2  
E
```

Result

The sample above prints two labels, the first at a speed of 2 inches per second (51 mm per second) and the second at the default setting.

p Postnet Bar Code

Label Format Bar Code ID to print a Postnet bar code

Syntax

p

Parameters

Bar Size

Behavior

- Valid Characters: 0-9
- Length: 5, 9 or 11 digits
- Valid bar widths: The width and height multiplier values of 00 will produce a valid Postnet symbol.
- Usage: The bar code height field is ignored since the symbol height is United States Postal Service specific. This bar code is to display the zip code on a letter or package for the US Postal Service.

Sample

```
<STX>L
D11
1p000000015010032569
121100000000100Barcode p
E
```

Result

Prints a Postnet bar code.

PD Present Distance

This command sets the label stop position past the start of print. When the next label format is received, the printer will automatically backfeed to the start position. If the present distance is set to zero, the printer will operate without reversing.

Parameter:	PD
Value / Range:	0 – 400
Units / Interpretation:	1/100 inch
Command Equivalent:	<STX>Kf

PJ Present Adjust Fine Tune

This command fine-tunes the Present Distance setting in dots to compensate for slight mechanical differences sometimes evident if multiple printers share label formats.

Parameter:	PJ
Value / Range:	+ / – dots
Units / Interpretation:	Dots (model specific)
Command Equivalent:	N/A

PM Pause Mode

See <STX>J for command details.

Parameter:	PM
Value / Range:	Y, N
Units / Interpretation:	Y = Enabled, N = Disabled
Command Equivalent:	<STX>J

pS Print Speed

See command Pa (Print Speed Mnemonic Table) for details.

Parameter:	pS
Value / Range:	Alpha Character
Units / Interpretation:	Model specific ranges;
Command Equivalent:	Pa

Note: Only full IPS speeds implemented.

Q Set Quantity of Labels to Print

This command sets the number of the label copies to be printed. A one to five digit value is allowed, if the command is delimited by a carriage return <CR>. This permits host applications to generate label quantity commands without the need to pad leading zeros. (A four-digit command value does not need to be <CR> terminated.)

Syntax

Qnnnnn

Parameters

Where:

- nnnnn - Is a one to five-digit delimited value setting for the number of labels to be printed. The default value is one.

Limitations

Specifying 9999 as the four-digit quantity results in continuous printing.

Q/q UCC/EAN Code 128 Bar Code

Label Format Bar Code ID to print a UCC/EAN Code 128 Bar Code with (Q) or without (q) Human Readable

Q or q

Parameters

Bar Size

Behavior

- Valid Characters: 0-9
- Length: 19 digits.
- Valid bar widths: The fourth character of record is the width of the narrow bar in dots. All other bars are a ratio of the narrow bar (2 times, 3 times, and 4 times the narrow bar width). Human readable characters for this bar code symbology are printed above the symbol.
- The printer spreads a weighted module 103 check sum.

Sample

```
<STX>L
D11
1Q00000001501000123456789012345678
121100000000100Barcode Q
E
```

Result

Prints a UCC/EAN Code 128 bar code.

QQ Query Configuration

This command requires a parameter of either K or Q.

K causes the printer to respond with the Printer Key, used for generating Upgrade Codes. A parameter value of Q causes the printer to respond with the current configuration settings. The <STX>Kc response command stream format is sent to the host computer via the same port as the query containing all parameters controlled by the <STX>Kc command, and may be used for restoring the printer's configuration or for configuring other printers.

Parameter:	QQ
Value / Range:	Q or K
Units / Interpretation:	N/A
Command Equivalent:	N/A

R Set Row Offset Amount

This command allows vertical adjustment of the point where printing begins. The printer is instructed to print label formats nnnn units above the position that the format specifies. This feature is useful when a single format is to be printed on labels containing preprinted information.

Syntax

Rnnnn

Parameters

Where:

- nnnn - Is a four-digit number (0000-9999) for the row offset, in inches/100 or millimeters/10. The default is 0.

Sample

```
<STX>L  
R0037  
141100001000100SAMPLE LABEL  
E
```

Result

The sample above prints a label with a row offset amount of .37 inches, unless in metric mode.

r Recall Stored Label Format

This command is used to retrieve label formats stored on a memory module.

Syntax

rnn...n

Parameters

Where:

- nn...n - Is a label name, up to 16 characters in length. The name is case-sensitive.

Sample

```
<STX>L  
rTEST  
Q0002  
E
```

Result

This sequence begins label format, retrieves format named TEST, quantity requested = 2, terminates formatting and prints. Embedding recalled labels, up to 6 levels of nesting.

R/r UCC/EAN Code128 K-MART NON EDI Bar Code

Label Format Bar Code ID to print an UCC/EAN Code128 K-MART NON EDI Bar Code with (R) or without (r) Human Readable text

Syntax

R or r

Parameters

Bar Size

Behavior

- Valid Characters: 0-9
- Length: 18 digits
- Valid bar widths: The fourth character of record is the width of the narrow bar in dots. All other bars are a ratio of the narrow bar (2 times, 3 times, and 4 times the narrow bar width). Human readable characters for this bar code symbology are printed above the symbol. (See W1R for an alternate.)
- This bar code is set up according to K-MART specifications.

Sample

```
<STX>L
D11
1R00000000150100012345678901234567
1211000000000100Barcode R
E
```

Result

Prints a KMART bar code.

RF Row Adjust Fine Tune

This command shifts the vertical start of print position in dots upward or downward.

Parameter:	RF
Value / Range:	+ / – dots
Units / Interpretation:	Resolution specific
Command Equivalent:	N/A

RO Row Offset

See Rnnnn for command details. DPL only parameter.

Parameter:	RO
Value / Range:	0 -9999
Units / Interpretation:	1/100 in.or 1/10 mm
Command Equivalent:	Rnnnn
DPL Menu Display:	"Row Offset"

S Set Feed Speed

This command controls the rate at which the label is moved through non-printed areas. The setting remains unchanged unless another feed speed command is received or until the printer is reset.

Syntax

<Sa>

Parameters

Where:

- a - Is a single alpha character representing a speed.
- h - Is Dot Height multiplier 1, 2, or 3.

Sample

a - Is a single alpha character representing a speed.

```
<STX>L
SE
141100001000100LABEL1
E
<STX>L
1411000010001000LABEL2
E
```

Result

The sample above sets a 3 IPS feed speed and prints two labels, with the same feed speed for both.

s Store Label Format in Module

This command stores a label format to a specified module as a .dlb file. Supplying the module name will store the label to that module; otherwise, using C will cause the label format to be stored in the selected default module (see <STX>X). In addition, this command terminates the Label Formatting Command.

Syntax

sann...n

Parameters

Where:

- a - Is the module designator representing a single character module name.
- nn...n - Represents the name of the label (maximum 16 characters). The name is case-sensitive.

Sample

```
<STX>L
D11
191100501000000123456789012
1911005020000001234567
191100500000000Sample
1X1100000000000B250250002002
Q0001
sATEST
```

Result

The sample above stores a format in Memory Module A and names it "TEST". (To recall a label format from the module use the "r" command.)

S/s UCC/EAN Code 128 Random Weight Bar Code

Label Format Bar Code ID to print an UCC/EAN Code 128 Random Weight Bar Code with (S) or without (s) Human Readable text

Syntax

S or s

Parameters

Bar Size

Behavior

- Valid Characters: 0-9
- Length: At least 34 digits.
- Valid bar widths: The fourth character of record is the width of the narrow bar in dots. All other bars are a ratio of the narrow bar (2 times, 3 times, and 4 times the narrow bar width).
- This bar code is commonly used by the food and grocery industry.

Sample

```
<STX>L
D11
1S000000015005001100736750292601193042032020018002110123456
121100000000100Barcode S
E
```

Result

Prints a UCC/EAN Code 128 Random Weight bar code.

SA SOP Adjust

This command shifts the vertical start of print position in dots upward or downward.

Parameter:	SA
Value / Range:	+ / – dots
Units / Interpretation:	Resolution specific
Command Equivalent:	N/A

SL Stop Location

This command sets the label stopping (and in certain cases the starting) location.

Parameter:	SL
Value / Range*:	A, H, P, C, T, N
Units / Interpretation:	Auto, Host, Peel, Cut, Tear, None
Command Equivalent:	N/A

* Only T is supported currently.

(SL) Stop Location – This command sets the label stopping (and in certain cases the starting) location, as follows:

Value	Stop Location
A	Automatically sets the stop location. Installed options will be "auto-sensed" and the appropriate stop position will automatically be set. Host commands are ignored.
H	Sets stop position according to options installed. If no options are installed the printer sets stop location to the next label's start of print. Host commands will override. The stop location (present distance) may be controlled dynamically by the host using the <STX>f or <STX>Kf commands. This selection has the same effect as <STX>KD Ignore Host Distance bit value 0.
P	Sets the stop location at approximately two millimeters behind the peel bar edge, a nominal peel position. The Present Sensor status and this setting are independent.
C	Sets the stop location to a nominal cut position. For die-cut media, the position is just following the end of the label. The cutter status and this setting are independent.
T	Sets the stop location at the tear bar.
N	Sets the stop location to the start of the next label, equivalent to setting the <STX>KD Ignore Host Distance bit value 1.

Stop Location Settings on Controls:

- Host – Ignore.
- Peel – Ignore.
- Cut – Ignore.
- Tear – sets the Print Mode to Tear Off.
- None – Ignore.

- Auto - sets the after print distance based on the option that is equipped (cut/tear/peel)

Present Distance:

- Parameter in the NV database set by UI and KcPD. and can be overridden by Kf if Stop location is Host.
- 0 = Auto and control by Stop Location; > 0 override Stop Location and is actual present distance.

SM Maximum Length Ignore

This command controls recognition of the <STX>M command.

Parameter:	SM
Value / Range:	0, 1
Units / Interpretation:	0 = Normal processing, 1 = Ignore
Command Equivalent:	N/A

SOH # Reset

Returns all settings to last-saved settings, purges all current print jobs and clears both the communications and print buffers. Also clears DRAM memory. This command does not cause the printer to restart.

Syntax

<SOH>#

Behavior

The printer will respond with a 'T' to all active communications channels in non-auto mode upon completion.

SOH * Reset

This command forces a soft reset of the microprocessor. The printer is initialized to the same state as a power cycle.

Syntax

<SOH>*

Behavior

The printer will reset with response to host printer:

- After restart printer sends an 'R' to all active communications channels in non-auto mode

SOH A Send ASCII Status String

This command allows the host computer to check the current printer status. The printer returns a string of eight characters, followed by a carriage return. Each character (see below) indicates an associated condition, either true (Y) or false (N). Byte 1 is transmitted first. See <SOH>F for alternative response.

Syntax

<SOH>A

Behavior

The printer response is:

- abcdefgh

Where:

Possible Values	Interpretation	Transmit Sequence
a - Y/N	Y = Interpreter busy	1
b - Y/N	Y = Paper out or fault	2
c - Y/N	Y = Ribbon out or fault	3
d - Y/N	Y = Printing batch	4
e - Y/N	Y = Busy printing	5
f - Y/N	Y = Printer paused	6
g - Y/N	Y = Label presented	7
h - Y/N	Y = N (not used)	8

Limitations

For "Interpreter busy (imaging)", Honeywell behavior is not the same as CEE all the time. Honeywell printers will set it to Y during printing and reset it to N after printing.

SOH a Send ASCII Extended Status String

This command allows the host computer to check an extended current printer status. The printer returns a string of seventeen characters, followed by a carriage return. Most characters (see below) indicate an associated condition, either true (Y) or false (N). Byte 1 is transmitted first.

Syntax

<SOH>a

Behavior

The printer response is:

- abcdefgh:ijklmnop:qrstuvwx

Where:

Possible Values	Interpretation	Transmit Sequence
a - Y/N	Y = Interpreter busy	1
b - Y/N	Y = Paper out or fault	2
c - Y/N	Y = Ribbon out or fault	3
d - Y/N	Y = Printing batch	4
e - Y/N	Y = Busy printing	5
f - Y/N	Y = Printer paused	6
g - Y/N	Y = Label presented	7
h - Y/N	Y = N (not used)	8
:	: = Always:	9
i - Y/N	Y = Cutter Fault	10
j - Y/N	Y = Paper Out	11
k - Y/N	Y = Ribbon Saver Fault	12
l - Y/N	Y = Print Head Up	13
m - Y/N	Y = Top of Form Fault	14
n - Y/N	Y = Ribbon Low	15
o - Y/N	Y = N (reserved for future)	16
p - Y/N	Y = N (reserved for future)	17
:	: = Always:	18

Possible Values	Interpretation	Transmit Sequence
q - Y/N	Ready (no data or signal)	19
r - Y/N	Waiting for Signal	20
s - Y/N	Waiting for Data	21
t - Y/N	Com1 has data not parsed	22
u - Y/N	Y = N (reserved for future)	23
v - Y/N	Y = N (reserved for future)	24
w - Y/N	Y = N (reserved for future)	25
x - Y/N	Y = N (reserved for future)	26

The printer response size may grow as new requirements are defined. The response will always be backward compatible and terminated with a <CR>. The user should not assume a fixed length response.

Limitations

For "Interpreter Busy" (imaging), Honeywell behavior is not the same as CEE all the time. Honeywell printers will set it to Y during printing and reset it to N after printing.

The following are not supported in Honeywell printers and are always 'N', except for q being always 'Y'.

- k - Y/N Y = Ribbon Saver Fault 12
- q - Y/N Y = Ready (no data or signal) 19
- r - Y/N Y = Waiting for Signal 20
- s - Y/N Y = Waiting for Data 21
- h - Y/N Y = Rewinder out or fault 8
- m - Y/N Y = Top of Form Fault 14

SOH B Toggle Pause

This command toggles the printer's paused state between "On" and "Off." (This is the same function achieved by pressing the PAUSE Key.)

Syntax

<SOH>B

Behavior

This command will illuminate the Paused/Stop Indicator and/or indicate PAUSED on the LCD or graphics display panel, suspend printing, and wait until one of the following occurs:

- The <SOH>B command is sent to the printer.
- The PAUSE Key is pressed.

Upon which the printer will turn the Paused/Stop Indicator "Off" and/or remove PAUSED from the LCD or graphics display, then resume operation from the point of interruption. (If the Receive Buffer is not full, an <XON> character will be transmitted from the printer.)

SOH C Stop/Cancel

This command performs the cancel print job function (i.e., it clears the current format from the print buffer, pauses the printer, and illuminates the Paused/Stop Indicator). (The pause condition is removed as described under <SOH>B.)

Syntax

<SOH>C

Behavior

The print buffer is cleared and the Paused/Stop Indicator is illuminated (and/or PAUSED is displayed on the LCD or graphics display) as operations are suspended, until one of the following occurs:

- The <SOH>B command is sent to the printer; or
- The PAUSE Key is pressed.

Upon which the printer will turn the Paused/Stop Indicator "Off" and/or remove PAUSED from the LCD or graphics display. (If the Receive Buffer is not full, an <XON> character will be transmitted from the printer.)

SOH E Send Batch Remaining Quantity

This command returns a four or five digit number indicating the quantity of labels that remain to be printed in the current batch, followed by a carriage return.

Returned values is four digits if specified quantity is ≤ 9998 . Five digits for quantities specified > 9999 . A value of 9999 is a special case and is to print forever and always returns 9999.

Communications latency may cause this value to be higher than actual on some printers.

Syntax

<SOH>E

Behavior

Printer response is:

- nnnn<CR> or nnnnn

Where: nnnn - Are four or five decimal digits, 0000-9999 or 00000-99999. Based on quantity specified.

SOH e Send Batch Printed Quantity

This command causes the printer to return a 5-digit number indicating the quantity of labels that have been printed in the current batch, followed by a carriage return.

Communications latency may cause this value to be lower than actual on some printers.

Syntax

<SOH>e

Behavior

Printer response is:

- nnnnn

Where: nnnnn - are five decimal digits, 00000 to 99999.

SOH F Send Status Byte

This command instructs the printer to send a single status byte where each bit (1 or 0) represents one of the printer's status flags, followed by a carriage return (see below). If an option is unavailable for the printer, the single bit will always be zero. See <SOH>A.

Syntax

<SOH>F

Behavior

Printer response is:

- X

Where: "X" is a hex value byte of data 0x00 through 0xFF with bits as indicated in the "Condition" column below:

Bit*	Bit* Value	Condition
8	1 or 0	Not used - always 0
7	1 or 0	Label presented
6	1 or 0	Printer paused
5	1 or 0	Busy printing
4	1 or 0	Printing batch
3	1 or 0	Ribbon out or Fault
2	1 or 0	Paper out or Fault
1	1 or 0	Interpreter busy (imaging)

*One is the least significant bit.

Limitations

For "Interpreter busy (imaging)", Honeywell behavior is not the same as CEE all the time. Honeywell printers will set it to Y during printing and reset it to N after printing.

ST Sensor Type

Sets sensor type.

Parameter:	ST
Value / Range:	G, C, R
Units / Interpretation:	G = Gap (edge), C = Continuous, R = Reflective
Command Equivalent:	<STX>e,<STX>r,<STX>c

STX a Enable Feedback Characters

Enables the feedback of hex data characters to be returned from the printer following specific events during data parsing and printing.

Syntax

<STX>a

Behavior

Printer response:

Event	Return Characters
Invalid character	0x07 (BEL)
Label printed	0x1E (RS)
End of batch	0x1F (US)

STX c Set Continuous Paper Length

This command sets the label size for applications to using continuous media. It disables the top-of-form function performed by the Media Sensor. The sensor, however, continues to monitor paper-out conditions.

Syntax

<STX>cnnnn

Parameters

Where:

- nnnn -Specifies the length of the media feed for each label format, in inches/100 or millimeters/10 (see <STX>m).

Sample

<STX>c0100

Result

The sample above sets in imperial mode a label length of 100, which equals 1.00 inch.

STX E Set Quantity for Stored Label

This command sets the number of labels for printing using the format currently in the print buffer. (The printer automatically stores the most recent format received in the buffer until the printer is reset or power is removed.) When used in conjunction with the <STX>G command, this will print the format.

Syntax

<STX>Ennnnn<CR>

Parameters

Where:

- nnnnn - A five-digit quantity, including leading zeros. <CR> - 0x0d terminates the name.

Sample

<STX>E00025
<STX>G

Result

Printer response: 25 labels of the current format in memory will be printed.

Limitations

- If no <CR> terminates the command, a four-digit quantity (nnnn) can be entered; and, specifying 9999 will cause continuous printing.

STX e Select Edge Sensor

This command enables the transmissive (see-through) sensing for top-of-form detection of die-cut and holed (notched) media.

Syntax

<STX>e

STX F Form Feed

This commands the printer to form feed to the next start of print.

Syntax

<STX>F

Behavior

The printer will form feed.

STX G Print Last Label Format

This command prints a previously formatted label and restarts a canceled batch job following the last processed label. This is used when there is a label format in the buffer.

Syntax

<STX>G

Behavior

The <STX>E command is used to enter the quantity. (Without the <STX>E command, one label will print.)

STX I Input Image Data

This command downloads images to the printer. The data that immediately follows the command string will be image data.

Syntax

<STX>labfnn...n<CR>data

Parameters

Where:

- a - Memory Module Bank Select.
- b - Data Type (optional),
 - 'A' - ASCII Characters 0-9, A-F, (7 bit)
- omitted - 00-FF, (8 bit)
- f - Format Designator Type:
 - 'F' - 7-bit Datamax-O'Neil image load file
 - 'B' - BMP 8-bit format, flipped, black and white (B&W)
 - 'b' - BMP 8-bit format, B&W
 - 'I' - IMG 8-bit format, flipped, B&W
 - 'i' - IMG 8-bit format, B&W
 - 'P' - PCX 8-bit format, flipped, B&W
 - 'p' - PCX 8-bit format, B&W
 - nn...n - Up to 16 characters used as an image name.
 - <CR> - 0x0d terminates the name.
 - data - Image data
 - 'R' - Datamax RLE image structure

Sample

<STX>IDpTest
data...data

Result

The sample above instructs the printer to (1) receive an 8-bit PCX image sent by the host in an 8-bit data format, (2) name the image "Test", and (3) store it in Module D (with a .dim file extension).

STX i Scalable Font Downloading

The command to download TrueType (.TTF) scalable fonts to the printer.

Syntax

<STX>imt^mnnName<CR>xx...xdata...

Parameters

Where:

- m - The designator of the module where the font is to be saved.
- t - Type of scalable font being downloaded:
- T = TrueType
- nn - Two-digit font reference ID. Valid range is 03-99, 9A-9Z, 9a-9z (base 62 numbers).
- Name - The title, up to 15 characters, for this font.
- <CR> - 0x0d terminates the Name.
- xx...x - Eight-digit size of the font data, number of bytes, hexadecimal, padded with leading zeros.
- data - The scalable font data.

Sample

<STX>iDT52Tree Frog<CR>000087C2data...

Result

The sample above downloads a TrueType font to Module D, and assigns it the Font ID of 52 with the name "Tree Frog" and file extension .dtt. The size of the font data is 0x87C2 bytes long.

STX J Set Pause for Each Label

This command causes the printer to pause after printing each label. It is intended for use with the peel mechanism or tear bar when the Present Sensor option is not installed.

Syntax

<STX>J

Behavior

After removing the printed label, the PAUSE Key must be pushed in order to print the next label. (The printer must be reset to clear the <STX>J command.)

STX k Test Communication Port

This command instructs the printer to transmit the Y character from the printer's port that received this command. (Failure to receive Y could indicate an interfacing problem.)

Syntax

<STX>k

Behavior

Printer response:

- Y

STX Kc Configuration Set

This command specifies the Power-up Configuration parameter values for the printer and is equivalent to using other system commands followed by the <SOH>U. This command is intended for easily configuring a custom setup, but NOT for dynamic configuration changes. Configuration commands are examined for differences relative to the current configuration, and have no impact when no differences exist. Printers will reset upon completion of a command stream containing parameter value changes. In any case, no commands should be sent to the printer until this reset is complete. Other command highlights include the following:

- These parameter values are equivalent to changing the respective menu settings and do not affect the factory default settings of the printer.
- If separated by a semi-colon (;), multiple parameter values may be sent in a single command stream; see sample below.
- All values are stored in Flash memory and remain in effect until new values are received or until factory defaults are restored.
- If system commands are sent that override the Power-up Configuration value(s), the Power-up Configuration value(s) will be restored the next time the printer is powered "On" or is reset.
- These parameters are the same as those found in the Menu System (display equipped models). The respective functions are documented in the appropriate Operator's Manual. Not all commands are effective on all printers.

Syntax

<STX>Kcaa1val1[:aalvall][;aanvaln]<CR>

Parameters

Where:

- aa1, aal, aan - Are two letter parameter names.
- val1, vall, valn - Are parameter values, with ranges appropriate for the associated parameter.

Sample

<STX>KcPA120;CL600;STC

Result

The sample above sets the Present Adjust to 120 dots, and the Sensor Type to Continuous with a label length of six inches.

The following tables lists the configuration set (<STX>Kc) commands that will be supported:

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Backup After Print	BA	Y, N	Y = Enabled, N = Disabled	N/A	This command determines the timing of the label back up positioning when the present distance is set and the GPIO option or Present Sensor option (including Peel and Present) is enabled. When enabled, the printer immediately backs up the label after the applicator-issued start of print signal is received or the label is removed, resulting in faster throughput. If disabled, the printer will not initiate repositioning until the next label is ready to print (may help prevent the curling of the label edge).
Backup Delay	BD	0 – 255	1/50 second	N/A	This command sets a time delay for the retraction of a presented label in one-fiftieth (1/50) of a second increments.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Backup (Reverse) Speed	BS or bS	alpha character	Model specific ranges	N/A	This command controls the rate of label movement during backup positioning for start of print, cutting or present distance.
British Pound	BP	Y, N	Y = Enabled, N = Disabled	N/A	This command, when enabled, will automatically switch from the Number symbol (#) found at 0x23 (default PC-850 Multilingual Symbol Set) to the British Pound symbol (£) at 0x9C.
Column Adjust Fine Tune	CF	+ / – dots	Resolution specific	N/A	This command fine-tunes the Column Offset setting by shifting both the horizontal start of print position and the Label Width termination point to the right in dots to compensate for slight mechanical differences sometimes evident when multiple printers share label formats.
Column Offset	CO	0 – 9999	1/100 in.	Cnnnn	See Cnnnn for command details.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Comm Heat Commands	CH	Y, N 1, 0	Y = Enabled, N = Disabled 1 = Enabled, 0 = Disabled	N/A	This command causes the printer to ignore DPL Heat commands. Ignore by setting value to N. Process by setting value to Y (default). When set to ignore Heat commands values are controlled via the menu setting.
Comm Speed Commands	CS	Y, N 1, 0	Y = Enabled, N = Disabled 1 = Enabled, 0 = Disabled	N/A	This command causes the printer to ignore DPL speed commands. Ignore by setting value to N. Process by setting value to Y (default). When set to ignore speed values are controlled via the menu setting.
Comm TOF Commands	CT	Y, N	Y = Enabled, N = Disabled	N/A	This command causes the printer to ignore DPL TOF (Gap, Continuous, and Reflective) commands. Ignore by setting value to N. Process by setting value to Y (default). When set to DPL TOF values are controlled via the menu setting.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Continuous Label Length	CL	0 – 9999	1/100 in.	<STX>c	See <STX>c for command details.
Control Codes	CC	S, 1, 2	S = Standard, 1 = Alternate, 2 = Alternate-2	N/A	This command, depending upon printer type, allows a change to the prefix of the software commands interpreted by the printer.
Cutter Equipped	CE	A/Y, E, N/D A, E/Y, N	A or Y = Auto, E = Enabled, N or D = Disabled A = Auto, E or Y = Enabled, N = Disabled	<STX>V	This command allows the printer to sense the cutter option. "A" - automatically senses device presence; if undetected, no error is generated. "E" - enables the device, where its presence must be detected; otherwise, a fault is generated. "N" - disables device detection. One of these values is returned in response to <STX>KcQQQ. Note that alternate values are accepted for backward compatibility as follows: "Y" is equivalent to "A".

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Darkness	DK	1 – 64	N/A	N/A	This command adjusts the length of the print head strobe to fine tune the HEAT setting.
Default Module	DM	D, G A, B	Module Letter	<STX>X	See <STX>X for command details.
Disable Symbol Set Selection	NS	Y, N	Y = Enabled, N = Disabled	N/A	This command prevents the <STX>y and y commands from changing the default single-byte symbol set. When enabled, DPL Symbol Set commands are ignored.
Double Byte Symbol Set	DS	2-Byte alpha character	AA – ZZ, printer resident symbol set	<STX>y, ySxx	See <STX>y or ySxx for command details.
DPI Emulation	DE	152, 200, 300, 400, 600	Dots per inch	N/A	This command allows printers with higher resolutions to emulate lower print resolutions
End Character	EN	D	N/A	N/A	This command terminates a <STX>Kc string.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
ESC Sequences	ES	Y, N	Y = Enabled, N = Disabled	N/A	This command allows data containing invalid ESC control code sequences to be processed (helpful because some systems send a "banner" to the printer). When set to "Disabled," ESC sequences are ignored and the data is processed. Bitmapped font downloads are disabled in this mode.
Fault Handling	FH	L, D, R, B	L,D,R,B	N/A	This command determines the level of user intervention and the disposition of the label being printed when a fault condition (ribbon out, media out, etc.) occurs.
Feed Speed	SS or sS	Alpha character	Model specific ranges	Sa	This command controls the rate of label movement between printing areas;
Feedback Mode	FM	Y, N	Y = Enabled, N = Disabled	<STX>a	See <STX>a for command details.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Font Emulation	FE	0, 1, 2	0 = No Substitution 1 = Sub CG Times SA0 2 = Sub User S50	N/A	–This command allows font substitution for all internal fonts, allowing a new default font to be defined without changing the host DPL data streams. Selecting a default font that supports a desired character set could match with third party software to print native characters without modifying the PC drivers. In other words, match the PC font with the Printer Font then no interpretation would be required by driver or printer. Depending on host drivers, the user may have to disable Symbol Set commands and modify the Default Symbol set.
Format Attributes	FA	X, O, T	X = XOR, O = Opaque, T = Transparent	An	See the "An" command for details.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
GPIO Equipped	GE	A, V, N, 2	A = Applicator, V = Verifier, N = Disabled, A = Applicator2	N/A	This command is used to interface the printer to external controlling devices.
Head Cleaning	HC	0 – 9999	Inches (or centimeters) multiplied by 1000	N/A	This command controls the print head cleaning routine. The entered value specifies the inch (or centimeter) count to reach before prompting a print head cleaning. If the number specified is exceeded three times, the printer will fault until cleaning is initiated.
Heat	HE	0 – 30	N/A	Hnn	See Hnn for command details.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Ignore Control Codes	IC	Y, N 1, 0	Y = Enabled, N = Disabled 1 = Enabled, 0 = Disabled	N/A	This command allows the user to remove control codes (< 20 Hex) in the data field. The selected line terminator is processed. When enabled, DPL Control Code (SOH, STX, CR, ESC, and ^) characters are removed from the data string. (Note that some fonts do have printable characters in this range and they will not be printed when enabled.)
Input Mode	EM	0, 1, 3, 9	0 = DPL, 1 = Line, 3 = PL-Z, 9 = Auto	N/A	This command determines the data processing mode.
Label Rotation	LR	Y, N	Y = Rotate 180 N = None	N/A	Command sets label rotation, allowing formats to be flipped 180 degrees.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Label Store	LM	F, S	F = Fields, S = States & Fields	N/A	This command selects the level of stored format recall to include the label-formatting command fields, or the label-formatting command fields and the printer state.
Label Width	LW	0075 – head width	1/100 inch	<STX>KW	This command sets the maximum limit for the printable width. Objects extending beyond this limit will NOT print;
Maximum Length Ignore	SM	0, 1	0 = Normal processing, 1 = Ignore	N/A	This command controls recognition of the <STX>M command.
Maximum Length	ML	0 – 9999	1/100 inch	<STX>M	See <STX>M for command details.
Media Type	MT	D, T	D = Direct, T = Thermal Transfer	N/A	This command selects the printing method: Direct Thermal for use with heat sensitive media or Thermal Transfer for use with media requiring a ribbon to create an image.
Pause Mode	PM	Y, N	Y = Enabled, N = Disabled	<STX>J	See <STX>J for command details.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Peel Mode	PE	Y, N	Y = Enabled, N = Disabled	N/A	This command, when enabled, specifies that a Feed operation be prevented when the label is presented and not removed.
Present Adjust Fine Tune	PJ	+ / – dots	Dots (model specific)	N/A	This command fine-tunes the Present Distance setting in dots to compensate for slight mechanical differences sometimes evident if multiple printers share label formats.
Present Distance	PD	0 – 400	1/100 inch	<STX>Kf	This command sets the label stop position past the start of print. When the next label format is received, the printer will automatically backfeed to the start position. If the present distance is set to zero, the printer will operate without reversing.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Present Sensor Equipped	PS	A/Y, E, N/D	A or Y = Auto, E = Enabled, N or D = Disabled	<STX>V	This command allows the printer to sense the present sensor option. A (or Y) - automatically senses device presence; if undetected, no error will be generated. E - enables the device, where its presence must be detected; otherwise, a fault is generated. N or D - disables device detection. See <STX>V for command details.
Print Contrast	PC	0 – 64	N/A	N/A	This command adjusts the relative print edge (gray) component of the print quality, which allows fine-tuning for specific media/ribbon mix.
Print Speed	pS	Alpha character	Model specific ranges	Pa	See command Pa for details.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Query Configuration	QQ	Q, K	N/A	N/A	<p>This command requires a parameter of either K or Q.</p> <p>K causes the printer to respond with the Printer Key, used for generating Upgrade Codes. A parameter value of Q causes the printer to respond with the current configuration settings. The <STX>Kc response command stream format is sent to the host computer via the same port as the query containing all parameters controlled by the <STX>Kc command, and may be used for restoring the printer's configuration or for configuring other printers.</p>

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Rewinder Adjust	RR	-xx, +yy	Applied torque, where -30 to +15 is the valid range.	N/A	This command changes the torque applied by the powered rewinder, in percentage points of the nominal force, to minimize TOF registration drift (sometimes evident when using small or narrow media).
Rewinder Equipped	RM	A/Y, E, N/D	A or Y = Auto, E = Enabled, N or D = Disabled	N/A	This command allows the printer to sense the powered internal rewind option. A (or Y) - automatically senses device presence; if undetected, no error is generated. E - enables the device, where its presence must be detected; otherwise, a fault is generated. N or D - disables device detection.
Ribbon Low Diameter	RL	100 – 200	1/100 in.	N/A	This command sets the threshold for a low ribbon indication, where nnnn is the diameter in hundredths of inches.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Row Adjust Fine Tune	RF	+ / – dots	Resolution specific	N/A	This command shifts the vertical start of print position in dots upward or downward.
Row Offset	RO	0 – 9999	1/100 in. Rnnnn	Rnnnn	See Rnnnn for command details.
Save As Filename	SF	Alphanumeric string	Up to 16 characters	N/A	This command, which may be sent separately or included as the last command in an <STX>Kc command string, saves the effective printer configuration to a file in Flash memory with a .dcm file extension.
Scalable Font Bolding	FB	1 – 36	N/A	N/A	This command sets a bolding factor to fine tune scalable fonts, where one causes the least amount of bolding and thirty-six the most (default value is 8).
Sensor Type	ST	G, C, R	G = Gap (edge), C = Continuous, R = Reflective	<STX>e, <STX>r, <STX>c	Sets sensor type.
Single Byte Symbol Set	AS	2-Byte alpha character	AA – ZZ, printer resident symbol set	<STX>y, ySxx	This command allows for a default single-byte symbol set.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Slew Speed	FS	Alpha character	Model specific ranges	<STX>KZSx	
Stop Location	SL	A, H, P, C, T, N	N/A	N/A	This command sets the label stopping (and in certain cases the starting) location.
TOF Precedence	TP	Y, N	Y = Enabled, N = Disabled	N/A	This command instructs the firmware to stop printing at the first top of form mark it detects. The default ("No") prints all of the data (traversing the top of form as necessary) then slews to the next TOF.
Unit of Measure	UM	M, I	M = Metric, I = Imperial	<STX>m, <STX>n	See <STX>m (metric) or <STX>n (imperial) for command details.
RFID	RI	A, B, D, E, L, M, N, P, R, S, T, U, V, W	Various	N/A	This command configures the optional RFID interface module
Dotcheck at Powerup	DC	Y, N	Y = Enabled, N = Disabled	N/A	Dotcheck at powerup
Dotcheck Schedule	DD	Y, N	Y = Enabled, N = Disabled	N/A	Dotcheck schedule
Dotcheck Hour	DH	0-23	Hour	N/A	Dotcheck hour

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Network Configuration	NE	Various	Various	N/A	The enhanced configuration two character identifier for the Network Configuration Parameters will be 'NE' for Network Ethernet.
Serial Port	SP	xyz	Various	N/A	This command configures the serial communication port(s).
GPIO Equipped	GE	A, V, N, 2	A = Applicator, V = Verifier, N = Disabled, A = Applicator2	N/A	This command is used to interface the printer to external controlling devices
GPIO Error Pause	GP	E, D	E = Enabled, D = Disabled	N/A	This command enables or disables the printer from sending a service required fault to the GPIO output.
GPIO Slew	GS	0 – 4 0 = Standard,	1 = Low Pulse, 2 = High Pulse, 3 = Active Low, 4 = Active High	N/A	This command sets the GPIO slew function and control.
End Of Print	EP	1, 2, 3, 4	1 = Low Pulse, 2 = High Pulse, 3 = Active Low, 4 = Active High	N/A	This command defines the signal output used to signify the End of Print (EOP) process.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Ribbon Low Signal	RS	3, 4	3 = Active Low, 4 = Active High	N/A	This command sets the signal output type for the Ribbon Low Diameter condition when using the optional GPIO
Start of Print	EQ	3, 4	3 = Active Low, 4 = Active High	N/A	This command defines the type of signal input required to control the Start of Print (SOP) process.
Empty Sensor Level	EV	0 – 255	N/A	N/A	This command sets threshold value for the "Empty" media sensor Parameter:
Gain Reflective Value	GR	0 – 31	N/A	N/A	This command sets the sensitivity of the reflective media sensor.
Gap / Mark Value	GM	0 – 255	N/A	N/A	This command sets threshold value for the media sensor's "gap" or "mark" parameter.
Mark Value	MV	0 – 255	N/A	N/A	This command sets threshold value for the reflective media sensor's "mark" parameter.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Paper Empty	PO	0 – 9999	1/100 inch	N/A	This command sets the length of travel before an out of stock condition is declared.
Paper Value	PV	0 – 255	N/A	N/A	This command sets threshold value for the media sensor's "paper" parameter.
Parallel Direction	PP	xz	N/A	N/A	This command controls the parallel port communications settings
Reflective Paper Value	RV	0 – 255	N/A	N/A	This command sets the threshold value for the reflective media sensor's paper parameter.
Sensor Gain Value	SG	0 – 32	N/A	N/A	This command sets the control of the voltage to the LED emitter of the Media Sensor.
Process SOH (Data)	IP	E, Y, D, N	Enable/Disable	N/A	Whether to allow SOH processing.
STX-v	SV	Y, N	Y = Enabled, N = Disabled	N/A	Whether to allow STX v processing.

STX KC Get Configuration

This command returns the configuration of the printer. The form of the returned data is similar to that of a printed Configuration Label. This command should be parsed by KEYWORDS, not character positions. Each line is terminated by a CR (0x0d) & LF (0x0a).

Syntax

<STX>KC<CR>

Behavior

Responds with Printer Configuration and DPL configuration. The printer settings included in DPL Configuration are as follow:

- Default Module
- Single Byte Symbol Set
- Double Byte Symbol Set
- Font Emulation
- SCL Font Bold Factor
- Format Attributes
- Label Rotation
- DPI Emulation
- DPL Emulation
- Column DPI Emulation
- Row DPI Emulation
- SOP Emulation
- Label Store
- Units of Measure
- Column Adjust
- Row Offset
- Pause Mode
- Use British Lbs
- Feedback Characters
- Control Code Sets
- Custom SOH Char
- Custom STX Char

- Custom CR Char
- Custom CNTBY Char

Limitations

The format of the displayed information will vary with printer, model, firmware version, and equipped options.

STX KE Character Encoding

This command is provided primarily as a means for users of 7-bit communication and to embed control characters and extended ASCII characters in their data streams. Any character in the DPL data stream may be substituted with a delimited two-character ASCII hexadecimal numeric equivalent. The command allows the delimiting character to be selected, and the encoding to be enabled or disabled. When character encoding is enabled, the printer will decode any ASCII hexadecimal numeric pairs following the delimiter as single-byte values. Character encoding is used where control characters cannot be transmitted or where control characters within data may prematurely terminate a label format record. Although the delimiter may be changed at any time (except within a label format definition), there cannot be more than one defined delimiter, and character encoding must be disabled with <STX>KEN prior to re-enabling regardless of any change in the delimiter.

Syntax

<STX>KEex<CR>

Parameters

Where:

- e - Y - character encoding enabled
- N - character encoding disabled
- x - Delimiter: one ASCII character (Do not include when e = N)

Sample

```
<STX>KEN
<STX>KEY\
<STX>L
1u0000001200120[]>\1E\01\1D\...\04\
E
```

Result

The sample above disables, and then enables character encoding with the backslash (\) as the delimiter. A UPS MaxiCode will be formatted using a data string interpreted as follows: []>R S01GS...EOT<CR> then formatting is terminated.

STX L Enter Label Formatting Command Mode

This command switches the printer to the Label Formatting Command Mode, where the printer expects to receive only Record Structures and Label Formatting Commands. Immediate, System-Level, and Font Loading commands will be ignored until the label formatting mode is terminated with E, s, or X, (see Label Formatting Commands for additional information).

See Label Format Commands for Details.

Syntax

<STX>L

STX M Set Maximum Label Length

This command instructs the printer move media this distance in search of the top-of-form (label edge, notch, black mark, etc.) before declaring a paper fault. A paper fault condition can occur if this setting is too close (within 0.1 inch [2.54 mm]) to the physical length of the label. Therefore, it is a good practice to set this command to 2.5 to 3 times the actual label length used. The minimum value should be at least 5" (127 mm).

Syntax

<STX>Mnnnn

Parameters

Where:

- nnnn - Is a four-digit length, 0000-9999, in/100 or mm/10. Maximum setting is 9999 (99.99 inches or 2540 mm). The default setting is 16 inches/ 406.4 mm.

Sample

<STX>M0500

Result

The sample above sets a maximum travel distance of 5 inches (unless the printer is in metric mode; see <STX>m).

STX m Set Printer to Metric Mode

This command sets the printer to interpret measurements as metric values (e.g., <STX>c0100 will equal 10.0 mm). The default is Imperial (see <STX>n).

Syntax

<STX>m

STX n Set Printer to Imperial Mode

This command sets the printer to interpret measurements as inch values (e.g., <STX>c0100 will equal 1.00 inch), and is the default mode.

Syntax

<STX>n

STX p Controlled Pause

This command will cause the printer to pause only after all previously received commands are executed, often useful between label batches. (This command will not clear the pause condition; see <SOH>B).

Syntax

<STX>p

STX Q Clear All Modules

This command instructs the printer to clear all Flash and DRAM modules; see the printer manual for module options. All stored data will be erased.

Syntax

<STX>Q

STX q Clear Module

This command clears the selected Flash or DRAM module. During normal operations if a module becomes corrupted (identifiable when the printer responds with a "No Modules Available" message to a <STX>W command) it must be cleared. All stored data will be destroyed.

Syntax

<STX>qa

Parameters

Where:

- a - Memory module designator.

STX r Select Reflective Sensor

This command enables reflective (black mark) sensing for top-of-form detection of rolled butt-cut, and fan-fold or tag stocks with reflective marks on the underside. This Media Sensor will detect a minimum mark of 0.1 inches (2.54 mm) between labels (see the Operator's Manual for media requirements). The end of the black mark determines the top of form. Use the <STX>O command to adjust the print position.

Syntax

<STX>r

STX S Recall Global Data and Place in Field

This command, when in the format record data field, places data from a specified global register into the data field. See the G command.

Syntax

<STX>Sn

Parameters

Where:

- n - Specifies the global register ("A" - "Z") that contains the data to place into the data field.

Sample

```
<STX>L
1211000000000000DMX
G
1A2210001000000<STX>SA
E
```

Result

The sample above places the string "DMX" into the next available global register (A), and then line 4 is effectively replaced by the data from global register A.

STX S Set Feed Speed

This command controls the output rate of the media when the FEED Key is pressed, or when feeding white space at the end of a label.

Syntax

<STX>Sn

Parameters

Where:

- n - Is a letter value starting with 'A' and representing the desired speed in one-half IPS increments

Behavior

This is not supported in Honeywell printers.

STX T Print Time and Date

This command, using string characters and markers, allows time and date data to be selected and retrieved from the internal clock. In addition, the <STX>T may be preceded by data to be printed/encoded, and/or the string may be terminated by an <STX> command followed by more data then <CR> terminated. The string characters/markers are not printed; instead, the label will show the corresponding print value.

Syntax

<STX>Tstring<CR>

Parameters

Where:

- string - Is any set of characters, A - Z and a - h; see the table below.

String Characters	Print Values	String Markers	Print Values
A	Week Day (Mon = 1, Sun = 7)	VW	24-hour time format
BCD	Day Name	XY	12-hour time format
EF	Month Number	Za	Minutes
GH...O	Month Name	gh	Seconds
PQ	Day	bc	AM or PM
RSTU	Year	def	Julian Date

Sample

```
<STX>L
121100001000100<STX>TBCD GHI PQ, TU
E
```

Result

Sample 1 prints SUN DEC 21, 98

The samples above assume a current printer date of December 21, 1998.

STX T Print Quality Label

This command instructs the printer to produce a Print Quality label, a format comprised of different patterns and bar codes useful in printer setup. To capture all printed information, use the labels as wide as the maximum print width and at least four inches (102 mm) long.

Syntax

<STX>T

STX t Test DRAM Memory Module

This command is to perform a system DRAM Module memory test.

Syntax

<STX>t

Parameters

None

Behavior

Printer must have "Feedback Characters" set to "Enable" and printer returns the Module tested, Module Size, and DRAM test results.

"MODULE D: 25600K Ram Tested Good".

STX U Label Format String Replacement Field

This command places new label data into format fields to build a label. Two options are available: Exact Length and Truncated Length.

To easily keep track of fields, place all of the fields to be updated with the command at the beginning of the label format. A maximum of 99 format fields can be updated. Fields are numbered consecutively 01 to 99 in the order received.

Exact Length Replacement Field Functions – The new data string must equal the original string length and contain valid data. When the dynamic data is shorter than the length of the originally defined data field, then field will be padded with blanks.

Truncation Replacement Field Functions – A variant of the <STX>U command includes the truncate option "T", where dynamic data shorter than the originally defined field length will not be padded and the original maximum field length is maintained for subsequent replacements.

Syntax

<STX>UTnnss...s<CR>

Parameters

Where:

- T – truncation (optional)
- nn – Is the format field number, 2 digits.
- ss...s – Is the new string data, followed by a

Sample

```
<STX>L
1A1100001000100data field 1
161100001100110data field 2
161100001200120data field 3
Q0001
E
<STX>U01123
<STX>U02New data F2
<STX>E0002
<STX>G
```

Result

The sample above produces three labels. The first is formatted with the commands between <STX>L and E. The next two labels print with the replacement data contained in the <STX>U commands (see <STX>E and <STX>G). The bar code is the same length: 3 digits and nine spaces.

STX v Request Firmware Version

This command causes the printer to send its version string (same as printed on the configuration label). The version may be different from printer to printer.

Syntax

<STX>v

Sample Response

- VER: PC43d, K10.15.017249

STX W Request Memory Module Information

This command requests a memory module directory listing. Results may vary depending on printer class, model, or firmware version.

Syntax

<STX>W[b][c]a

Parameters

Where:

- b s optional – list file size also
- c e optional – list file extension also
- a - Data type:
 - F = Downloaded fonts
 - G = Graphics (Image)
 - L = Label formats
 - C = Configuration files
 - X = Menu language files
 - N = Plug-ins
 - M = Miscellaneous type files
 - f = Resident fonts
 - p = Entire module content (Legacy and H, A and M Print Listing Command) Not supported I and EClass)
 - * = All types

Behavior

For Menu language files (WX) and Plug-ins (WN) responds with "Available Memory" but not expected to list any files in this phase.

For Entire module content (Wp), this will not be supported in Honeywell printers. There is no response to any Wp commands.

Sample response

<STX>WF

Printer response: MODULE: D

S50 92244ttf50

AVAILABLE BYTES: 945152

MODULE: G

AVAILABLE BYTES: 852480

MODULE: X

AVAILABLE BYTES: 852480

MODULE: Y

AVAILABLE BYTES: 852480

Additional Information

Sample response if size and extension are specified:

<STX>Wse*

Printer response:

- Module: D
- testmsc.msc,13923 BYTES
- Available Bytes: 22716K
- Module: G
- testfont1.dtt,95725 BYTES
- testfont2.dbm,109400 BYTES
- Available Bytes: 54912K

STX w Test Flash Memory Module

This command is to performs a system Flash Memory test.

Syntax

<STX>w

Parameters

None

Sample

<STX>w

Limitations

None - This command always return Flash Test Good,

STX X Set Default Module

This command, typically used prior to the loading of HP/PCL-4 formatted bitmapped fonts (see Font Loading Commands), is designed to allow the user to select between modules when downloading information. The default module is one of the following:

1. The first alpha designator of the existing modules if item 2 has not occurred.
2. The module selected by this command.

Syntax

<STX>Xa

Parameters

Where:

- a - Module designator.

STX x Delete File from Module

This command removes a specific file from the specified module. The file name is removed from the module directory and thus the file cannot be accessed.

Syntax

<STX>xmtnn...n<CR>

Parameters

Where:

- m - Module designator.
- t - The file type identification code:
 - G = Image file
 - L = Label format file
 - F = Downloaded bitmapped font file
 - S = Downloaded scalable font file
 - C = Configuration file
 - X = Language file
 - N = Plug-in file
 - M = Miscellaneous file type
 - U = Unknown type – must use extension if applicable
- nn...n - The file to delete, where:
 - Font (bitmapped), three character font identifier;
 - Font (scalable), two character font identifier;
 - Graphic name, up to sixteen case sensitive alphanumeric characters; or,
 - Label format name, up to sixteen case sensitive alphanumeric characters.

Sample

<STX>xDS50

Result

The sample above deletes a downloaded scalable font with ID 50 from Module D.

STX y Select Font Symbol Set

This command selects the scalable font symbol set. The selected symbol set remains active until another symbol set is selected. Option dependent and not all symbol sets can be used with all fonts. See "Symbol Sets" specification section for complete list of "Single Byte Sets" and "Double Byte Sets".

Syntax

<STX>ySxx

Parameters

Where:

- S - Byte-size designation:
- S = Single byte symbol set
- U = Double byte symbol set
- xx - Symbol set selection.

Sample

<STX>ySPM

Result

The sample above selects the PC-850 multilingual set.

STX Z Print Configuration Label

This command causes the printer to produce a Database Configuration Label. To capture all printed information, use the labels as wide as the maximum print width and at least four inches (102 mm) long.

Syntax

<STX>Z

Behavior

The printed configuration in configuration label will include both Printer Configuration and DPL Configuration. The printer settings included in DPL Configuration are as follows:

- Default Module
- Single Byte Symbol Set
- Double Byte Symbol Set
- Font Emulation
- SCL Font Bold Factor
- Format Attributes
- Label Rotation
- DPI Emulation
- DPL Emulation
- Column DPI Emulation
- Row DPI Emulation
- SOP Emulation
- Label Store
- Units of Measure
- Column Adjust
- Row Offset
- Pause Mode
- Use British Lbs
- Feedback Characters
- Control Code Sets
- Custom SOH Char
- Custom STX Char

- Custom CR Char
- Custom CNTBY Char

STX z Pack Module

On legacy Datamax-O'Neil printers, compresses the memory module. Ignored on modern Datamax-O'Neil and Honeywell printers.

Syntax

<STX>z

Parameters

None

Sample

<STX>z

Limitations

This command is legacy and is ignored on modern Datamax-O'Neil and Honeywell printers.

T Telepen

Syntax

N/A

Behavior

Valid Characters: ASCII character set (0-127)

Variable Length

Valid bar widths: The fourth character of the record is the width of the narrow bar in dots. All other bars are a ratio of the narrow bar (2 times, 3 times, and 4 times the narrow bar width).

Sample

```
<STX>L
D11
1T00000000150100ABCDEF
121100000000100Barcode T
E
```

Result

Prints a Telepen bar code.

T Set Field Data Line Terminator

This command, intended for use with record types that accept binary data (e.g., PDF417), allows binary control codes (e.g., a carriage return) to be embedded in the printed data by setting an alternate data line terminator. Valid only for the next format record, the terminator then defaults back to the carriage return.

Syntax

Tnn

Parameters

Where:

- nn - Is an ASCII two-character representation of a HEX code to be used for the end of data terminator.

Sample

```
<STX>L  
T00  
1911002000000000TEST<NULL>  
141100001000100TERMINATOR  
Q0001  
E
```

Result

The sample above sets a NULL terminator (ASCII NULL: HEX 00) for the data line termination code. The terminator is immediately restored to a carriage return <CR>, as seen in the format record containing the text "TERMINATOR".

TP TOF Precedence

This command instructs the firmware to stop printing at the first top of form mark it detects. The default ("No") prints all of the data (traversing the top of form as necessary) then slews to the next TOF.

Parameter:	TP
Value / Range:	Y, N
Units / Interpretation:	Y = Enabled, N = Disabled
Command Equivalent:	N/A

U Mark Previous Field as a String Replacement Field

This command controls the formatting of replacement data. Specifying a field as a string replacement for dynamic, not static, fields will optimize throughput. See <STX>U.

Syntax

U

Sample

```
<STX>L
D11
121100001000000123456789012
U
1211000020000001234567
U
161100000000000Sample
1X1100000000000B250250002002
Q0001
E
<STX>U01ABCDEFGHIJKL
<STX>U028901234
<STX>G
```

Result

The sample above sets the format for register loading and prints two labels. The first two of four format records have been designated replacement fields. The second label is generated with System-Level field-replacement commands and printed.

The length of the original string sets the data string length of any replacement; both must be equal. The data being used when created must be valid for the font type being selected.

u UPS MaxiCode, Modes 2 & 3 Bar Code

Label Format Bar Code ID(u) to print a UPS MaxiCode, Modes 2 & 3.

Syntax

u

Behavior

The printer supports MaxiCode as defined in the AIM Technical Specification. The following examples illustrate various label format record message syntaxes for encoding data as MaxiCode. In the following examples, special formatting is used to denote special ASCII characters as shown:

Symbol	Hexidecimal Value
RS	1E
GS	1D
EOT	04

- (Printer message syntax allows for EOT to be substituted with <CR> or the use of both EOT and <CR>.)
- The data stream can force Mode 2 or 3 encoding by placing #2 or #3, respectively, before the data. If this is not specified, the printer chooses the best mode.

Sample

```
<STX>L
D11
1u0000001200120#3
[]>RS01GS96123456GS068GS001GS1Z12345675GSUPSN GS12345EGS089GSGS1/
1GS10.1GSYGSGSGSUTRSEOT
121100000000100Barcode u
E
```

Result

Prints a MaxiCode symbol in Mode 3.

Where:

- #3 (Forces Mode 3 encoding)
- []>RS01GS96 (Message Header)
- 123456 Maximum 9 alphanumeric ASCII, postal code (Primary Message)
- 068 Country Code (Primary Message)
- 001 Class (Primary Message)

- GS1Z1... (Secondary Message)
- ...TRSEOT

U UPS MaxiCode, Modes 2 & 3 Bar Code with Byte Count Specifier

Label Format Bar Code ID (U) to print a UPS Maxicode, Modes 2 & 3. This ID allows users to specify the number of data byte to be in the bar code. This allows for special control codes like cr's to be included in the data.

Syntax

U

Parameters

Byte Count

Behavior

Specified Length – The upper case U identifies a UPS MaxiCode bar code with a 4-digit string length specifier. This allows values 0x00 through 0xFF to be included within the data strings without conflicting with the DPL format record terminators. The four-digit decimal data byte count immediately follows the 4-digit column position field. This value includes all of the data following the byte count field, but does not include itself.

Sample

```
<STX>L
D11
1U00000010001000051327895555840666this package<0x0D>is going to Datamax
121100000000100Barcode U
E
```

Result

Prints a Maxicode bar code that includes a Byte Count Specifier (the portion in bold), where 0051 equals the four-digit decimal data byte count and includes all bytes that follow until the end of the bar code data. Field termination is set by the byte count. <STX>, <CR>, and <0x0D> all represent single byte values of hexadecimal 02, 0D, and 0D, respectively. The UPS MaxiCode bar code produced encodes "327895555840666this package<CR>is going to Datamax", and prints a line of text: Bar Code U.

UM Unit of Measure

See <STX>m (metric) or <STX>n (imperial) for command details.

Parameter:	UM
Value / Range:	M, I
Units / Interpretation:	M = Metric, I = Imperial
Command Equivalent:	<STX>m, <STX>n

v FIM

Syntax

N/A

Behavior

Valid Characters: A, B, C, or D

Length: 1 character

Valid bar widths: The width and height multiplier works the same as for fonts on this bar code.

This bar code is used to display the Facing Identification Mark (FIM) that is carried on certain types of letter mail for the U S Postal Service:

FIM A: Courtesy reply mail with Postnet.

FIM B: Business reply, penalty or franked mail without Postnet.

FIM C: Business reply, penalty or franked mail with Postnet.

FIM D: OCR readable mail without Postnet (typically for envelopes with a courtesy reply window).

Sample

```
<STX>L  
D11  
1v00000000150100A  
121100000000100Barcode v  
E
```

W1c DataMatrix Bar Code

Label Format Bar Code ID (W1c) to print a DataMatrix bar code.

Syntax

W1c

Parameters

See Behavior section for details

Behavior

- Valid Characters: Any 8-bit byte data
- Variable Length
- DataMatrix is a two-dimensional matrix symbology, which is comprised of square modules arranged within a perimeter finder pattern. There are two basic types: ECC 000-140 and ECC 200.

ECC 000 - 140 symbols

These square symbols can be any odd size from 9x9 to 49x49, which may be specified in fields jjj and kkk. If an ECC 000-140 symbol is specified with even numbers of rows or columns, the next largest odd value will be used. Input values greater than 49 or less than 9 will cause the symbol to be automatically sized for the input character stream. The record format is shown here, expanded with spaces.

a W b[b] c d eee ffff gggg hhh i jjj kkk ll...l

Where:

Field	Valid Inputs	Meaning
a	1,2,3, and 4	Rotation
W	W	Fixed value, extended bar code set
b[b]	c, 1c	Selects the DataMatrix bar code - the two differing values have no other significance.
c	1 to 9, A to Z, and a to z	Module size horizontal multiplier
d	1 to 9, A to Z, and a to z	Module size vertical multiplier

Field	Valid Inputs	Meaning
eee	000 to 999	No effect; Must be numeric
ffff	0000 to 9999	Label position, row
gggg	0000 to 9999	Label position, column
hhh	000, 050, 080, 100, 140	A 3-digit convolutional error correction level. If any number other than one of these options is entered then the nearest lesser value from the valid entries is used.

Field	Valid Inputs	Meaning
i	0 - 6	<p>1 digit format identification:</p> <p>0 - Automatically choose the encodation scheme based on the characters to be encoded.</p> <p>1 - Numeric data.</p> <p>2 - Upper-case alphabetic.</p> <p>3 - Upper-case alphanumeric and punctuation characters (period, comma, hyphen, and slash).</p> <p>4 - Upper-case alphanumeric.</p> <p>5 - ASCII, the full 128 ASCII character set.</p> <p>6 - Any 8-bit byte.</p> <p>If a format identifier is selected which will not encode the input character stream then the bar code symbol will not be printed.</p> <p>Auto-encodation format identification is recommended since it will select the best possible encodation scheme for the input stream.</p>
jjj	9, 11, 13 ... 49. ECC 140 minimum is 15.	<p>A 3 digit odd number (or 000) of rows requested. 000 causes rows to be automatically determined. If the rows and columns do not match, the symbol will be sized to a square using the greater of the two values.</p>

Field	Valid Inputs	Meaning
kkk	9, 11, 13 ... 49. ECC 140 minimum is 15.	A 3 digit odd number (or 000) of columns requested. 000 causes columns to be automatically determined. If the rows and columns do not match, the symbol will be sized to a square using the greater of the two values.
ll...l	8-bit data, followed by a termination character.	Data to be encoded.

ECC 200 symbols

There are 24 square symbol sizes available, with both row and column dimensions, which may be specified in fields jjj and kkk, measured in modules as indicated in the following list - 10, 12, 14, 16, 18, 20, 22, 24, 26, 32, 36, 40, 44, 48, 52, 64, 72, 80, 88, 96, 104, 120, 132, and 144. If an ECC 200 symbol is specified with odd numbers of rows or columns, the next largest even value will be used. Input values greater than 144 or less than 10 will cause the symbol to be automatically sized for the input character stream. The record format is shown here, expanded with spaces.

a W b[b] c d eee ffff gggg hhh i jjj kkk ll...l

Where:

Field	Valid Inputs	Meaning
a	1,2,3, and 4	Rotation
W	W	Fixed value, extended bar code set
b[b]	c, 1c	Selects the DataMatrix bar code - the two differing values have no other significance.
c	1 to 9, A to Z, and a to z	Module size horizontal multiplier
d	1 to 9,A to Z, and a to z	Module size vertical multiplier
eee	000 to 999	No effect; Must be numeric
ffff	0000 to 9999	Label position, row

Field	Valid Inputs	Meaning
gggg	0000 to 9999	Label position, column
hhh	200	ECC 200 uses Reed-Solomon error correction.
i	0	Fixed value, not used
jjj	10, 12, 14, 16, 18, 20, 22, 24, 26, 32, 36, 40, 44, 48, 52, 64, 72, 80, 88, 96, 104, 120, 132, 144	A 3 digit even number (or 000) of rows requested. 000 causes rows to be automatically determined. The symbol will be sized to a square if the rows and columns do not match by taking the larger of the two values.
kkk	10, 12, 14, 16, 18, 20, 22, 24, 26, 32, 36, 40, 44, 48, 52, 64, 72, 80, 88, 96, 104, 120, 132, 144	A 3 digit even number (or 000) of columns requested. 000 causes columns to be automatically determined. The symbol will be sized to a square if the rows and columns do not match by taking the larger of the two values.
ll...l	8-bit data, followed by a termination character.	Data to be encoded.

Sample

```

<STX>L
D11
1W1c440000100010020000000000DATAMAX
121100000000100Barcode W1c
E

```

W1C DataMatrix Bar Code with Byte Count Specifier

Label Format Bar Code ID (W1C) to print a DataMatrix bar code. This ID allows users to specify the number of data byte to be in the bar code. This allows for data values 0x00 through 0xFF to be included within the data strings without conflicting with the DPL format record terminators.

Syntax

W1C

Parameters

- Byte Count
- See Behavior section for details

Behavior

Specified Length – The upper case C identifies a DataMatrix bar code with a string 4-digit length specifier. This allows values 0x00 through 0xFF to be included within the data strings without conflicting with the DPL format record terminators. The four-digit decimal data byte count immediately follows the four-digit column position field. This value includes all of the data following the byte count field, but does not include itself.

Sample

```
<STX>L
D11
1W1C440000100010000292000000000Datamax<0x0D>prints best
121100000000100Barcode W1C
E
```

Result

From the example above, the bar code's data stream, 1W1C440000100010000292000000000 Datamax<0x0D>prints best includes a Byte Count Specifier (the portion in bold), where 0029 equals the four-digit decimal data byte count and includes all bytes that follow until the end of the bar code data. Field termination is set by the byte count. <STX>, <CR>, and <0x0D> all represent single byte values of hexadecimal 02, 0D, and 0D, respectively. The DataMatrix bar code produced encodes "Datamax<CR>prints best," and prints a line of text: Bar Code W1C.

W1d / W1D QR Code Bar Code

Label Format Bar Code ID's for printing a QR Code bar code in Auto Format (d) or Manual Format (D) modes.

Syntax

a W1 b c d eee ffff gggg hh...h

Parameters

Where:

Field	Valid Inputs	Meaning
a	1,2,3, and 4	Rotation
W1	W1	Fixed value, extended bar code set
b	D and d	Selects the QR bar code formatting mode, where: D = Manual formatting. Allows the data string (hh...h) to be entered with a comma (,) as a field separator; fields are optional per QR Code specifications, and the first field indicates Model 1 or Model 2 QR Code (Model 2 is the default). d = Automatic formatting. Allows the data string (hh...h) to be data only.
c	1 to 9, A to Z, and a to z	Module size horizontal multiplier Each cell in the bar code is square, therefore "c" and "d" must be equal. Depending on the conversion mode (<STX>n or <STX>m), each unit indicates a cell dimension of .01 inch or .1 mm.

Field	Valid Inputs	Meaning
d	1 to 9, A to Z, and a to z	Module size vertical multiplier
eee	000 to 999	No effect; Must be numeric
ffff	0000 to 9999	Label position, row
gggg	0000 to 9999	Label position, column
hhh	Valid ASCII character string, followed by (a) termination character(s)	QR Code data string (see Generation Structure, below).

Behavior

- Valid Characters: Numeric Data, Alphanumeric Data, 8-bit byte data, and Kanji characters
- Variable Length: The two-dimensional bar code (as documented in AIM, Version 7.0).

Generation Structure

The data input structure (hh...h) is as follows:

Auto Format (W1d)

With bar code identifier "d", the data begins after the last character of the column position field, and does not include any command characters. The data string is terminated with a termination character, usually a 0x0d hex that occurs twice in succession. The bar code symbol will have the following characteristics:

1. Model 2
2. Error Correction Code Level = "M" (Standard Reliability Level)
3. Mask Selection = Automatic
4. Data Input Mode = Automatic^[1]

Manual Formatting (W1D)

With bar code identifier "D", minor changes allow flexibility for data entry. (Spaces have been added for readability.)

[q,] [e [m] i,] cdata cdata cdata...cdata term^[2]

Where:

Field	Valid Inputs	Meaning
q	1, 2	QR Code Model number, optional. Model 2 is the default.
e	H, Q, M, L	<p>Error Correction Level (Reed-Solomon) – Four levels allowing recovery of the symbol code words:</p> <p>H = Ultra Reliability Level (30%)</p> <p>Q = High Reliability Level (25%)</p> <p>M = Standard Reliability Level (15%)</p> <p>L = High Density Level (7%)</p>
m	0 – 8, none	<p>Mask Number, optional:</p> <p>None = Automatic Selection</p> <p>0-7 = Mask 0 to Mask 7</p> <p>8 = No Mask</p>
l	A, a, M, m	<p>Data Input Mode:</p> <p>A = Automatic setting, ASCII^[1]</p> <p>a = Automatic, hex-ASCII^[1]</p> <p>M = Manual Setting, ASCII^[2]</p> <p>m = manual, hex-ASCII^[2]</p>

Field	Valid Inputs	Meaning
cdata	N, A, B, K immediately followed by data	Character Mode: N = Numeric, N data A = Alphanumeric, A data B = Binary , Bnnnn data (where nnnn = data byte count, 4 decimal digits; byte-count /2 for hex- ASCII K = Kanji, K data
term	[3]	The data string is terminated with a termination character, generally a 0x0d hex, but can be changed by the operator. If the Data Input Mode is Automatic, the data string is terminated with two successive termination characters.

[1] When Data Input Mode = Automatic, Kanji data cannot be used; Manual data input required.

[2] When using manual formatting, commas are required between format fields and data types.

[3] <CR> represents the line termination character as defined by the current control code set or after use of Txx, line field terminator label format command.

If HEX/ASCII mode is selected in manual Data Input Mode, only the data for Kanji or Binary data types will be converted, therefore the other data types and all command characters must be entered in ASCII format. If HEX/ASCII is selected in automatic Data Input Mode, all of the data must be entered in HEX/ASCII format.

Data Append Mode String Format, Manual Formatting – Bar Code W1D

D aa tt pp l

Where:

Field	Valid Inputs	Meaning
D	D	Data Append Mode String Format indicator
aa	00, 99	QR Code Number in Append Series, 2 decimal digits
tt		The total number of QR Codes in series, 2 decimal digits
pp		Value of Parity, 2 digits, 8 LSBs of data parity
e	H, Q, M, L	As above
m	0 – 8, none	As above
i	A, a, M, m	As above
cdata	N, A, B, K immediately followed by data	As above
term		As above

Characteristics

Models:

- Model 1 (original version), bar code versions 1 through 14
- A. ECC Levels "H", "M", "Q", and "L"
- B. Mask Selection Automatic or 0 through 8
- C. Data Input Modes Automatic and Manual
- D. Data Append Mode
- Model 2 (enhanced version), bar code versions 1 through 40
- A. ECC Levels "H", "M", "Q", and "L"
- B. Mask Selection Automatic or 0 through 8
- C. Data Input Modes Automatic and Manual
- D. Data Append Mode

Representation of data:

- Dark Cell = Binary 1
- Light Cell = Binary 0

Symbol Size (not including quiet zone, 4 cells on each of the 4 sides):

- Model 1: 21 X 21 cells to 73 X 73 cells (Versions 1 to 14, increase in steps of 4 cells per side)
- Model 2: 21 X 21 cells to 177 X 177 cells (Versions 1 to 40, increase in steps of 4cells per side)

Data Characters per symbol (maximum for symbol size):

- Numeric Data
 - Model 1; Version 14; ECC = L: 1,167 characters
 - Model 2; Version 40; ECC = L: 7,089 characters
- Alphanumeric Data
 - Model 1; Version 14; ECC = L: 707 characters
 - Model 2; Version 40; ECC = L: 4,296 characters
- Binary Data
 - Model 1; Version 14; ECC = L: 486 characters
 - Model 2; Version 40; ECC = L: 2,953 characters
- Kanji Data
 - Model 1; Version 14; ECC = L: 299 characters
 - Model 2; Version 40; ECC = L: 1,817 characters
- Code Type: Matrix
- Orientation Independence: Yes

Sample

```
<STX>L
D11
1W1D44000001000102HM,AThis is the data portion also with
binary,B0003<0xfe><0xca><0x83><0x0D>
121100000000100Barcode W1D
E
```

Result

Where:

- QR Code bar code, Cell Size = 0.1 inch square, positioned at X = .1" and Y = .1", ECC=H, Mask = Automatic, Data Input Mode = Manual.
- <STX>L
- D11
- 1W1D4400000100010H3M,AThis is the data portion also with
- binary,B0003<0xfe><0xca><0x83><0x0D>

- 121100000000100Barcode W1D
- E

Where:

- QR Code bar code, Cell Size = 0.04 inch square, positioned at X = .1" and Y = .1", ECC = H, Mask = 3, Data Input Mode = Manual.
- <STX>L
- D11
- 1W1D88000001000102,LM,K<0x81><0x40><0x81><0x41><0x81><0x42><0x0D>
- 121100000000100Barcode W1D
- E

Where:

- QR Code bar code, Cell Size = 0.08 inch square, positioned at X = .1" and Y = .1", ECC = L, Mask = Automatic, Data Input Mode = Manual - Kanji.

W1f / W1F Aztec Bar Code

Label Format Bar Code ID's for printing an Aztec bar code in variable and fixed length modes.

Variable Length (W1f): This two dimensional bar code holds a large amount of data in a small area and can provide a high level of error checking.

Specified Length (W1F): With a string four-digit length specifier, values 0x00 through 0xFF to be included within the data strings without conflicting with the DPL format record terminators.

Syntax

a W1 b c d eee ffff gggg [hhhh] i jjj kk...k

Parameters

Where:

Field	Valid Inputs	Meaning
a	1,2,3, and 4	Rotation
W1	W1	Fixed value, extended bar code set
b	f and F	Lowercase selects the Aztec bar code, variable length. Uppercase selects the Aztec bar code with a Byte Count Specifier
c	1 to 9, A to Z, and a to z	Module size horizontal multiplier, 0 = default size. The c/d module size parameters should be equal to produce a square symbol. When the label command (Dwh) is used to generate larger text, then c and d may be used to compensate and ensure a square symbol.
d	1 to 9, A to Z, and a to z	Module size vertical multiplier, 0 = default size (See explanation for "c", above.)

Field	Valid Inputs	Meaning
eee	000	No Effect
ffff	0000 to 9999	Label position, row
gggg	0000 to 9999	Label position, column
[hhhh]	0000 to 9999	Optional string length specifier. Field termination is set by this byte count. This decimal value includes all of the data following this byte count field, but does not include itself.
i	0, 1	Extended Channel Interpretation (ECI) mode; 0 = Disabled, 1 = Enabled
jjj	000 to 300	Error Correction (EC) / Amount (see table below), where: 000 – Default EC, approximately 23% 001 – 099 EC fixed value, expressed as a percent. 101 – 104 Compact core, 1 to 4 layers respectively. 201 – 232 Full size core, 1 to 32 layers respectively. 300 – Rune format, encodes three ASCII decimal digits 0-256; scanner decode output is decimal number 0-256
kk...k	8-bit data, followed by a termination character	Data to be encoded.

The error correction or size selection determines the symbol size and other characteristics of the symbol, as shown in the following table. Attempting to encode more data that has been made available will result in no symbol printed.

Error Correction (EC) / Size Implications

jjj	Symbol Size [1]	Symbol Format	Maximum [2] Binary Data Bytes	Maximum [2] Alphabetic Characters	Maximum [2] Numeric Characters
000	variable	data dependent	1914	3067	3832
001 to 099	variable	data and EC dependent	1914	3067	3832
101	15	compact	6	12	13
102	19	compact	19	33	40
103	23	compact	33	57	70
104	27	compact	53	89	110
201	19	full size	8	15	18
202	23	full size	24	40	49
203	27	full size	40	68	84
204	31	full size	62	104	128
205	37	full size	87	144	178
206	41	full size	114	187	232
207	45	full size	145	236	294
208	49	full size	179	291	362
209	53	full size	214	348	433
210	57	full size	256	414	516
211	61	full size	298	482	601
212	67	full size	343	554	691
213	71	full size	394	636	793
214	75	full size	446	718	896
215	79	full size	502	808	1008
216	83	full size	559	900	1123
217	87	full size	621	998	1246
218	91	full size	687	1104	1378
219	95	full size	753	1210	1511
220	101	full size	824	1324	1653
221	105	full size	898	1442	1801

jjj	Symbol Size [1]	Symbol Format	Maximum [2] Binary Data Bytes	Maximum [2] Alphabetic Characters	Maximum [2] Numeric Characters
222	109	full size	976	1566	1956
223	113	full size	1056	1694	2116
224	117	full size	1138	1826	2281
225	121	full size	1224	1963	2452
226	125	full size	1314	2107	2632
227	131	full size	1407	2256	2818
228	135	full size	1501	2407	3007
229	139	full size	1600	2565	3205
230	143	full size	1702	2728	3409
231	147	full size	1806	2894	3616
232	151	full size	1914	3067	3832
300	11	Rune	1	1	1

[1] Measured in module size x, assuming default module size (cd=00).

[2] Maximum sizes are approximate and data dependent, and may be less than indicated.

Error Correction

Size 001 to 099: This value specifies the percent of symbol code words to be used for error correction. Actual error correction word percentage will vary depending on data. The default value, approximately 23%, is recommended. Any other value may be selected to meet the user's needs. Some minimum-security code word may be generated depending on the data sent for encoding, particularly when the volume of that data is small. If the data capacity is exceeded no symbol is printed.

Size 101 to 104: Values 101 through 104 result in 1 through 4 layers (two modules thick) respectively, around the center finder pattern. Data volume constraints apply as indicated in the table above. Symbols will be of the compact form. All available code word will be used for error correction. If the data capacity is exceeded no symbol is printed.

Size 201 to 232: Values 201 through 232 result in 1 through 32 layers (two modules thick) respectively, around the center finder pattern. Data volume constraints apply as indicated in the table above. Symbols will be of the full-size form. All available code words will be used for error correction. If the data capacity is exceeded no symbol is printed.

Size 300: Value 300 informs the printer that the data, which follows will be used to encode one RUNE symbol. The data consists of one to three ASCII digits with value range of 0 to 256. The data may include leading zeros. Data streams longer than three digits or data that includes non-numeric characters may have unpredictable results.

Extended Channel Interpretation Mode

A value of 1 provides for extended channel code words to be inserted into the bar code symbol, using escape sequences in the data stream. This mode also provides for effective Code 128 and UCC/EAN 128 emulations, when used in with appropriately configured bar code readers. The valid values for escape sequences are of the form <ESC>n, where:

<ESC> – 1 byte with value 2710 = 1B16

n – 1 ASCII digit, range 0 through 6

These escape sequences are encoded as FLG(n) character pairs described in the International Symbology Specification – Aztec Code, AIM, 1997-11-05, and the meanings of the values for n are the same in both.

<ESC>0 – Is encoded as FLG(0), and interpreted as FNC1 or <GS> depending on its location in the data stream. The printer does not validate <ESC>0 locations in the data stream. When <ESC>0 is the leading data in the stream, it is interpreted as a FNC1 as used in the Code 128 symbology, and specifically for UCC/EAN 128 applications. For appropriately configured scanners this will be interpreted/transmitted as a]C1 symbology identifier preamble. The printer does not validate UCC/EAN 128 data syntax. When <ESC>0 follows a single alphabetic or two numeric characters respectively, then it also interpreted as a FNC1. For appropriately configured scanners this would be interpreted/transmitted as a]C2 symbology identifier preamble, and the alpha or numeric characters preceding the FNC1 are Application Indicators assigned by AIM International. The printer does not check AI validity. When <ESC>0 is anywhere else in the data stream, a <GS> replaces it in the bar code symbol, as with UCC/EAN 128 field separators.

<ESC>n – Is encoded as FLG(n), and is interpreted as signaling Extended Channel Interpretation. When the value of n is from 1 to 6, it signals that the following n digits comprise an extended channel identifier for use with ECI compliant bar code scanners. An erroneous bar code symbol may result from failing to follow <ESC>n with n digits. Any <ESC>0 following <ESC>n and not within the n digits will be encoded as FLG(0). In the context of a FLG(n), any backslash "\" (9210) will be interpreted by the scanner as two backslashes "\\".

Functions Not Supported

- Structured Append
- Reader Initialization Symbol Generation
- Module shaving

Behavior

Valid Characters: All ASCII characters, depending upon the selected options.

Variable Length (W1f): This two dimensional bar code holds a large amount of data in a small area and can provide a high level of error checking.

Specified Length (W1F): With a string four-digit length specifier, values 0x00 through 0xFF to be included within the data strings without conflicting with the DPL format record terminators.

Sample

```
<STX>L
D11
1W1f00000001501000000AZTEC
121100000000100Barcode W1f
E
```

Result

The variable length example encodes "AZTEC" with no ECI input, and 23% error correction, and prints the bar code. A line of text is also printed.

Sample

```
<STX>L
D11
1W1F000000015010000170000AZTEC<0x0D>bar code
121100000000100Barcode W1F
E
```

Result

The specified length example includes a byte count field for all bytes that follow until the end of the bar code data. The byte count is 17. The symbology encodes "AZTEC<CR>bar code", and prints the bar code. Notice that a <CR> does not terminate the bar code format record. A line of text is also printed.

W1I EAN128 Bar Code (with Auto Subset Switching)

Label Format Bar Code ID (W1I) to print EAN128 (with Auto Subset Switching and Human Readable text).

Syntax

W1I

Parameters

See Behavior Section below for details.

Behavior

Valid characters: The entire 128 ASCII character set.

Variable length, minimum 4 characters

Valid bar widths: The fourth character of record is the width of the narrow bar in dots. All other bars are a ratio of the narrow bar (2 times the narrow bar width, 3 times the narrow bar width, and 4 times the narrow bar width).

This printer supports the Code 128 subsets A, B, and C. If the data begins with at least four numeric characters the default start code is subset C. If there is a non-numeric in the first four characters then the default start code is subset B. The next character after start is always FNC1. Subset switching between B and C is performed based on rules as below:

1. If in subset C and there are an odd number of numeric digits, subset B will be set prior to the last digit.
2. If four or more numeric digits appear consecutively while in subset B, the character code C will be set prior to the digits.
3. When in subset C and a non-numeric occurs, subset B will be inserted prior to the character.

Note that there is no auto-switching from or to Subset A. Standard switches are still used (see table below).

Subset A: Includes all of the standard uppercase alphanumeric keyboard characters plus the control and special characters.

Subset B: Includes all of the standard uppercase alphanumeric keyboard characters plus the lowercase alphabetic and special characters.

Subset C: Includes the set of 100 digit pairs from 00 through 99 inclusive, as well as special characters. EAN128 Subset C is used for double density encoding of numeric data.

Special Character Handling: Characters with an ASCII value greater than 95 are considered special characters. To access these values, a two-character reference table is built into the printer; see table below.

ASCII	2 CHAR	CODE A	CODE B	CODE C
96	&A	FNC3	FNC3	-NA-
97	&B	FNC2	FNC2	-NA-
98	&C	SHIFT	SHIFT	-NA-
99	&D	CODEC	CODEC	-NA-
100	&E	CODEB	FNC4	CODEB
101	&F	FNC4	CODEA	CODEA
102	&G	FNC1	FNC1	FNC1

Control Codes: By sending these control codes, control characters can be encoded into a Code 128 Subset A bar code (e.g., ABC{DE will be encoded as ABC<ESC>DE):

Control Code in the Bar Code Data Stream	Encoded Control Character Result
`	NUL
a through z	1 - 26
{	ESC
	FS
}	GS
~	RS
ASCII 127	US

Sample

```
<STX>L
D11
1W1I0000000025002512345&G10Z2133021AK
121100000000100Barcode W1I
E
```

Result

Prints an EAN128 bar code. When scanned this bar code will decode as follows:

```
[C][FNC1]1234[B]5[F1]10Z[C]213302[B]1AK(81)
```

W1J Code 128 Bar Code (with Auto Subset Switching)

Label Format Bar Code ID (W1J) to print a Code 128 (with Auto Subset Switching)

Syntax

W1J

Parameters

See behavior section below for details.

Behavior

- Valid characters: The entire 128 ASCII character set.
- Variable length
- Valid bar widths: The fourth character of record is the width of the narrow bar in dots.
- All other bars are a ratio of the narrow bar (2 times the narrow bar width, 3 times the narrow bar width, and 4 times the narrow bar width).
- This printer supports the Code 128 subsets A, B, and C. If the data begins with at least four numeric characters the default start code is subset C. If there is a non-numeric in the first four characters or there are less than four then the default start code is subset B. Subset switching between B and C is based on the following rules:
- If in subset C and there are an odd number of numeric digits, subset B will be set prior to the last digit.
- If four or more numeric digits appear consecutively while in subset B, the character code C will be set prior to the digits. If there is an odd number of numerics already in B, the first numeric will be placed in B with the others in C.
- When in subset C and a non-numeric occurs, subset B will be inserted prior to the character.
- Note that there is no auto switching from, or to, subset A. Standard switches are still used. See table below.

Subset A: Includes all of the standard uppercase alphanumeric keyboard characters plus the control and special characters.

Subset B: Includes all of the standard uppercase alphanumeric keyboard characters plus the lowercase alphabetic and special characters.

Subset C: Includes the set of 100 digit pairs from 00 through 99 inclusive, as well as special characters. Code128 Subset C is used for double density encoding of numeric data.

Special Character Handling: Characters with an ASCII value greater than 95 are considered special characters. To access these values, a two-character reference table is built into the printer; see table below.

ASCII	2 CHAR	CODE A	CODE B	CODE C
96	&A	FNC3	FNC3	-NA-
97	&B	FNC2	FNC2	-NA-
98	&C	SHIFT	SHIFT	-NA-
99	&D	CODEC	CODEC	-NA-
100	&E	CODEB	FNC4	CODEB
101	&F	FNC4	CODEA	CODEA
102	&G	FNC1	FNC1	FNC1

Control Codes: By sending these control codes, control characters can be encoded into a Code 128 Subset A bar code (e.g., ABC{DE will be encoded as ABC<ESC>DE):

Control Code in the Bar Code Data Stream	Encoded Control Character Result
`	NUL
a through z	1 - 26
{	ESC
	FS
}	GS
~	RS
ASCII 127	US

Sample

```
<STX>L
D11
1W1J000000025002512345&G10Z2133021AK
121100000000100Barcode W1J
E
```

Result

Prints a Code128 Auto bar code. When scanned this bar code will decode as follows:

```
[C]1234[B]5[F1]10Z2 [C]133021[B]AK(95)
```

W1k GS1 DataBar Bar Code

Label Format Bar Code ID (W1k) to print GS1 DataBar bar code. Supports six types: GS1 DataBar, DataBar Truncated, DataBar Stacked, DataBar Stacked Omni-Directional, DataBar Limited, and DataBar Expanded.

Syntax

W1k

Parameters

See behavior section below.

Behavior

Valid Characters: Type dependent

Bar Code Data String Length: Type dependent

GS1 DataBar is a continuous, linear symbology used for identification in EAN.UCC systems. There are six different types:

GS1 DataBar Type	Overview*
GS1 DataBar	<ul style="list-style-type: none">• Encodes a full 14-digit EAN.UCC item identification within a linear symbol that can be scanned omni-directionally.• The encodable character set is 0 through 9.• The maximum numeric data capacity is the application identifier plus 14-digit numeric item identification.• Error detection is mod 79 checksum.
GS1 DataBar Truncated	
GS1 DataBar Stacked	
GS1 DataBar Stacked Omni-Directional	

GS1 DataBar Type	Overview*
GS1 DataBar Limited	<ul style="list-style-type: none"> • Encodes a 14-digit EAN.UCC item identification with indicator digits of zero or one within a linear symbol. • The encodable character set is 0 through 9. • The maximum numeric data capacity for is the application identifier plus 14-digit numeric item identification. • Data must begin with indicator 0 or 1. Any higher number results in discarded data. • Error detection is mod 89 checksum.
GS1 DataBar Expanded	<ul style="list-style-type: none"> • Encodes EAN.UCC item identification plus supplementary AI element strings. • The encodable character is a subset of ISO 646, consisting of upper and lower case letters, digits and 20 selected punctuation characters, plus the special function character FNC1, (#). • The maximum numeric data capacity is 74 numeric or 41 alphanumeric. • Error detection is mod 211 checksum.

*Additional data can be encoded in a two-dimensional composite as per specification (see AIM Spec ITS/99-001 for more details).

Syntax for GS1 DataBar (spaces added for readability):

a W1 k c d eee ffff gggg h i j m n...n l p...p

Field	Valid Inputs	Meaning
a	1,2,3, and 4	Rotation
W1	W1	Fixed value, extended bar code set
k	k	Selects GS1 bar code
c	1 to 9, A to Z, and a to z	Wide bar ratio, default = 2
d	1 to 9, A to Z, and a to z	Narrow bar ratio, default = 2
eee	000	No Effect

Field	Valid Inputs	Meaning
ffff	0000 to 9999	Label position, row
gggg	0000 to 9999	Label position, column
h	R, T, S, D, L	GS1 Type: R = GS1 DataBar Linear, T = GS1 DataBar Truncated, S = GS1 DataBar Stacked, D = GS1 DataBar Stacked Omni-Directional, L = GS1 DataBar Limited
i	1-9	Pixel Multiplier
j	0 to (i-1)	X pixels to undercut
m	0 to (i-1)	Y pixels to undercut
n...n	0 to 9	Numeric linear data, length 13 ^[1]
	(optional)	Vertical bar separates primary linear data from secondary 2-D data
p...p	2-D data (optional)	Additional 2-D data ^[2]

[1] The application identifier is not encoded in the symbol nor is the last check digit; the user should enter in a 13-digit value. The decoding system will display the application identifier and calculate the check digit.

[2] The separator row height for two-dimensional composite is fixed at one times the pixel multiplier.

Syntax for the GS1 DataBar Expanded bar code (spaces added for readability):

a W1 k c d eee ffff gggg h i j m nn p...p | q...q

Field	Valid Inputs	Meaning
a	1,2,3, and 4	Rotation
W1	W1	Fixed value, extended bar code set
k	k	Selects GS1 bar code
c	1 to 9, A to Z, and a to z	Wide bar ratio, default = 2

Field	Valid Inputs	Meaning
d	1 to 9, A to Z, and a to z	Narrow bar ratio, default = 2
eee	000	No Effect
ffff	0000 to 9999	Label position, row
gggg	0000 to 9999	Label position, column
h	E	GS1 Type: E= GS1 DataBar Expanded
i	1-9	Pixel Multiplier
j	0 to (i-1)	X pixels to undercut
m	0 to (i-1)	Y pixels to undercut
nn	00 or 02-22, even only ^[2]	Segments per row. If it is 0, bar code is expanded linear, otherwise it is expanded stacked.
p...p	0 to 9	Subset of ISO646, including alphanumerics
	(optional)	Vertical bar separates primary linear data from secondary 2-D data
q...q	2-D data (optional)	Additional 2-D data ^[2]

[1] Separator row height for two-dimensional composite is fixed at one times the pixel multiplier.

[2] When using additional 2-D composite data, the sequence width must be at least 4.

Sample

```
<STX>L
D11
1W1k0000001500150E100022001234567890
121100000000100Barcode W1k
E
```

Result

Prints a GS1 DataBar Expanded bar code.

Limitations

X/Y pixels to undercut are not supported in phase 1.

W1L Planet Code Bar Code

Label Format Bar Code ID (W1L) to print a Planet Code bar code.

Syntax

W1L

Behavior

Valid Characters: 0-9

Variable length, minimum one digit

Sample

```
<STX>L  
D11  
1W1L4405001000100123456789  
E
```

Result

Prints a Planet bar code.

The planet bar code is limited to a maximum magnification value of 8.

For Dotsize 1, if height magnification value passed is > 8 then it is reset to 8.

For Dotsize 2, the height-magnification value is limited to 4 (because, for dotsize =2, height-magnification = 4, the calculated height magnification is 8).

W1m / W1M Australia Post 4-State Bar Code

Label Format Bar Code ID to print barcode in the Australia Post System.

Syntax

<a>,<W1>,<m>,<c>,<d>,<eee>,<ffff>,<gggg>,<hh>,<iiiiiii>,<j...j>

Parameters

Where:

Field	Valid Inputs	Meaning
a	1,2,3, and 4	Rotation
W1	W1	Fixed value, extended bar code set
m	m and M	Lowercase selects the Australia Post bar code, and uppercase selects the Australia Post bar code with a human readable field.
c	0	Not used.
d	0	Not used.
eee	000	Not used.
ffff	0000 to 9999	Label position, row
gggg	0000 to 9999	Label position, column
hh	11, 87, 45, 92, 59, 62,44	Format Control Code (FCC): FCC Value Resulting Format 11 Standard Customer Bar Code 87 Routing Bar Code 45 Reply Paid Bar Code 92 Redirection Bar Code 59 Customer Bar Code 2 62 Customer Bar Code 3 44 Reserved
iiiiiii	00000000-99999999	8-digit Delivery Point Identifier (DPID)

Field	Valid Inputs	Meaning
j...j	0-9, a-z, A-Z, #, space	Optional – Customer information, Bar Code 2 or 3 (Bar Code 2 has a maximum of 8 digits or 5 alphanumeric characters, while Bar Code 3 has a maximum of 15 digits or 10 alphanumeric characters), where if all numeric then data will be encoded in N-type; otherwise, C-type will be used.

Behavior

Length: 37, 52, or 67 bars

Usage: This symbol is used for processing mail in the Australia Post System. The symbol is 37, 52 or 67 bars in length, and the height and ratios are fixed according to the specification (see "Customer Barcoding Technical Specifications" from Australia Post for more information).

Sample

```
<STX>L
D11
1WM00000005000501139987520
E
```

Result

Prints a standard Customer Bar Code using a DPID of "39987520". Note that the human readable shows the format control code, sorting code and the generated Reed Solomon error correction parity values.

W1p Intelligent Mail Bar Code (IMB)

Label Format Bar Code ID (W1p) to print an Intelligent Mail Bar Code (IMB).

Syntax

W1p

Parameters

See Behavior section

Behavior

Valid Characters: 0-9

Length: 20, 25, 29 or 31 digits

Valid bar widths: The width and height multiplier values of 00 will produce a valid IMB symbol.

Usage: The bar code height field is ignored since the symbol height is United States Postal Service specific. This bar code represents a 20 digit tracking code and a zero, five, nine, or eleven digit routing code on a letter or package for the USPS.

The maximum size of the bar code is limited to Dotsize 1 and Height-Magnification of 1 (any bigger magnification causes the bar code to be truncated and hence not scanable).

Sample

```
<STX>L
D11
1W1p000000050005001234567094987654321012345678
91
E
```

Result

Prints an IMB bar code.

W1t TCIF Linked 3 of 9 (TLC39)

Syntax

<a>,<W1>,<t>,<c>,<d>,<eee>,<ffff>,<gggg>,<hhhhh>,<;>,<ii...i>

Parameters

Where:

Field	Valid Inputs	Meaning								
a	1,2,3, and 4	Rotation								
W1	W1	Fixed value, extended bar code set								
t	t	Selects TLC39 bar code								
c	1 to 9, A to Z, and a to z	Wide bar of Code 39, ratio of wide to narrow must be between 2:1 and 3:1.								
d	1 to 9, A to Z, and a to z	Narrow bar of Code 39								
eee	001 to 999	Height of Code 39								
ffff	0000 to 9999	Label position, row								
gggg	0000 to 9999	Label position, column								
hhhhh	ECI Data	Six digit ECI number								
;	Fixed	Parses data. (If the seventh character is not a semi colon then only a six-digit code 39 will print.)								
i...i	S/N Data	<div>Up to 25 alphanumeric serial number characters to be encoded in the MicroPDF417 symbol. This symbol is fixed at four columns. The number of rows is determined by the amount of data, as follows:</div> <table><tr><th>Character Count</th><th>Row Count</th></tr><tr><td>1-14</td><td>4</td></tr><tr><td>15-22</td><td>6</td></tr><tr><td>23-25</td><td>8</td></tr></table>	Character Count	Row Count	1-14	4	15-22	6	23-25	8
Character Count	Row Count									
1-14	4									
15-22	6									
23-25	8									

The link flag is the character "T" in Code 39 without a start/stop indicator. The flag location is based on the ECI code location, length, and height. The location of the MicroPDF417 symbol is based on the location of ECI bar code. The symbol's module width and height are fixed at the default.

Behavior

Valid Characters: All ASCII characters.

Variable Length: Encodes a 25-character alphanumeric number in MicroPDF417 symbol.

Specified Length: Encodes a six-digit sequence in a standard Code 39 followed by a link flag character in Code 3 of 9.

Sample

```
<STX>L
D11
1Wt0000001500150123456;ABCD12345678901234
1911A0801300170A1B2C3DAAA
121100000000100Barcode W1t
E
```

Result

Prints a TLC39 bar code.

W1z MicroPDF417 Bar Code

Label format bar code ID (W1z) to print a MicroPDF417 bar code. MicroPDF417 is a 2 dimensional bar code capable of holding large amounts of data in a small area. It provides a high level of redundancy and error checking.

Syntax

a W z c d eee ffff gggg h i j k 0 m...m

Parameters

Where:

Field	Valid Inputs	Meaning
a	1,2,3, and 4	Rotation
W1	W1	Fixed value, extended bar code set
z	z	Selects the MicroPDF417 bar code.
c	1 to 9, A to Z, and a to z	Module size horizontal multiplier, 0 – default size.
d	1 to 9, A to Z, and a to z	Module size vertical multiplier, 0 – default size.
eee	000	No Effect
ffff	0000 to 9999	Label position, row
gggg	0000 to 9999	Label position, column
h	1 to 4	Number columns
i	0 to 9 and A	Row / Error Correction index
j	0, 1	Byte Compaction Mode, 1 - best binary data compression
k	0, 1	Macro Character Substitution, 1 - disable
0	0	Fixed ASCII digit 0. Reserved for future use.
m...m	8-bit data	Data to be encoded.

The number of columns (h) and row / error correction index (i) combine to form the selection index (hi), which determines other symbol characteristics as shown below:

hi	Columns	Rows	Max Errors Corrected [1]	Symbol Width [2]	Symbol Height [3]	Max Binary Data Bytes [3]	Max Alpha Characters [5]	Max Numeric Characters [5]
10	1	11	4	40	24	3	6	8
11	1	14	4	40	30	7	12	17
12	1	17	4	40	36	10	18	26
13	1	20	5	40	42	13	22	32
14	1	24	5	40	50	18	30	44
15	1	28	5	40	58	22	38	55
20	2	8	5	57	18	8	14	20
21	2	11	6	57	24	14	24	35
22	2	14	6	57	30	21	36	52
23	2	17	7	57	36	27	46	67
24	2	20	8	57	42	33	56	82
25	2	23	10	57	48	38	67	93
26	2	26	12	57	54	43	72	105
30	3	6	9	84	14	6	10	14
31	3	8	11	84	18	10	18	26
32	3	10	13	84	22	15	26	38
33	3	12	15	84	26	20	34	49
34	3	15	18	84	32	27	46	67
35	3	20	23	84	42	39	66	96
36	3	26	29	84	54	54	90	132
37	3	32	35	84	66	68	114	167
38	3	38	41	84	48	82	138	202
39	3	44	47	84	90	97	162	237
40	4	4	5	101	10	8	14	20
41	4	6	8	101	14	13	22	32
42	4	8	11	101	18	20	34	449
43	4	10	13	101	22	27	46	67

hi	Columns	Rows	Max Errors Corrected [1]	Symbol Width [2]	Symbol Height [3]	Max Binary Data Bytes [3]	Max Alpha Characters [5]	Max Numeric Characters [5]
44	4	12	15	101	26	34	58	85
45	4	15	18	101	32	45	76	111
46	4	20	23	101	42	63	106	155
47	4	26	29	101	54	85	142	208
48	4	32	35	101	66	106	178	261
49	4	38	41	101	48	128	214	313
4A	4	44	47	101	90	150	250	366

[1] Can be any combination of 1 erasures + 2 substitutions (e.g. 13 maximum number of errors corrected might include 7 erasures and 3 substitutions).

[2] Includes 1 module width of quiet zone on either side.

[3] Assumes the module height is 2 module width, and includes one module width quiet zones on top and bottom.

[4] Assumes Binary Compaction.

[5] Assumes Text Compaction.

Byte Compaction Mode (j = 1)

A value of 1 forces Byte Compaction. The compaction ratio is six 8-bit bytes of data compressed into a 5-symbol code word. See the table above for the maximum data allowed for any row/column/error correction selection index (hi).

Macro Character Substitution Disable (k=1)

By default Macro Character Substitution is enabled (k=0). When enabled, Byte Compaction has priority over Macro Character Substitution. When Macro Character Substitution is enabled, the data stream header and trailer are compacted when they conform to the following forms:

- [D]>R S05G S data RS E
or
- [D]>R S06G S data RS E

where:

- data may not contain adjacent bytes with values RS or GS
- (RS = 3010 , 1E16 and GS = 2910 , 1D16 and E = 410 , 416)

Functions Not Supported

- General Purpose Extended Channel Interpretations, including Code-128 emulations
- Structured Append
- Reader Initialization Symbol Generation
- Module shaving

Behavior

- Valid Characters: All ASCII characters, depending on the selected options.
- Variable Length

Sample

```
<STX>L
D11
1W1z000000015010014000PDF417
121100000000100Barcode W1z
E
```

Result

Prints a MicroPDF417 bar code, default module size (cd = 00), with 1 column, 24 rows, error correction of 33%, no byte compaction, macro character substitution enabled.

W1Z Micro PDF417 Bar Code with Byte Count Specifier

Label format bar code ID (W1Z) to print a MicroPDF417 bar code. MicroPDF417 is a 2 dimensional bar code capable of holding large amounts of data in a small area. It provides a high level of redundancy and error checking. The Byte Count specifier allows for data values 0x00 through 0xFF to be included within the data strings without conflicting with the DPL format record terminators.

Syntax

W1Z

Parameters

See Behavior section below,

Behavior

Specified Length – The upper case Z identifies a Micro PDF417 bar code with a 4-digit string length specifier. This allows values 0x00 through 0xFF to be included within the data strings without conflicting with the DPL format record terminators. The four-digit decimal data byte count immediately follows the four-digit column position field. This value includes all of the data following the byte count field, but does not include itself.

Sample

```
<STX>L
D11
1W1Z0000000150100001214000pdf<0x0D>417
121100000000100Barcode W1Z
E
```

Result

From the example, the bar code's data stream, 1W1Z0000000150100001214000PDF<0x0D>417, includes a Byte Count Specifier (the portion in bold), where 0012 equals the four-digit decimal data byte count and includes all bytes that follow until the end of the bar code data. Field termination is set by the byte count. <STX>, <CR>, and <0x0D> all represent single byte values of hexadecimal 02, 0D, and 0D, respectively. The Micro PDF417 bar code produced encodes "pdf<CR>417", and prints a line of text: Bar Code W1Z.

X Terminate Label Formatting Mode

This command causes the printer, when in label formatting mode, to immediately switch to the system command mode and generate a label format based on the data received at that point. However, unlike the "E" command, it will not print a label. (Other termination commands are the "E" and "s".)

Syntax

X

Sample

```
<STX>L  
141100001000100SAMPLE  
X
```

Result

The sample above will result in a label format, but no label will be printed.

y Select Font Symbol Set

This command, like the <STX>y, selects the scalable font symbol set. The selected symbol set remains active until another symbol set is selected. See "Symbol Sets" specification section for complete list of "Single Byte Sets" and "Double Byte Sets".

Syntax

ySxx

Parameters

Where:

- S - Byte-size designation;
- S = Single byte symbol sets; and,
- U = Double byte symbol sets.
- xx - Symbol set selection.

z Zero (Ø) Conversion to "0"

This command removes the slash zero in fonts 0 to 8, and in the human readable field (if any) of the bar codes A to Z. The command applies only to format records containing those fonts and bar codes, and is effective only for the label format in which it appears.

Syntax

z

Sample

```
<STX>L  
z  
1211000000000000Test0000  
E
```

Result

None of the smooth fonts (i.e., Font 9) use the slash zero convention, and this command will have no effect on scalable fonts.

Z PDF-417 Bar Code with Byte Count Specifier

Label Format Bar Code ID (Z) to print a PDF-417 bar code. This ID allows users to specify the number of data byte to be in the bar code. This allows for data values 0x00 through 0xFF to be included within the data strings without conflicting with the DPL format record terminators.

Syntax

Z

Parameters

- Byte Count
- See Behavior section for details.

Behavior

Specified Length – The upper case Z identifies a PDF-417 bar code with a string 4-digit length specifier. This allows values 0x00 through 0xFF to be used within the data strings without conflicting with the DPL format record terminators. The four-digit decimal data byte count immediately follows the 4-digit column position field. This value includes all of the data following the byte count field, but does not include itself.

Sample

```
<STX>L
D11
1Z00000001501000015F1000000pdf<0x0D>417
121100000000100Barcode Z
E
```

Result

From the example above, the bar code's data stream,
1Z00000001501000015F1000000pdf<CR>417

includes a Byte Count Specifier (the portion in bold), where 0015 equals the four-digit decimal data byte count and includes all bytes that follow until the end of the bar code data. Field termination is set by the byte count. <STX>, <CR>, and <0x0D> all represent single byte values of hexadecimal 02, 0D, and 0D, respectively. The PDF-417 bar code produced encodes "pdf<CR>417", and prints a line of text: Bar Code Z.

z PDF-417 Bar Code

Label Format Bar Code ID (z) to print a PDF-417 bar code.

Syntax

z

Parameters

See Behavior section for details.

Behavior

- Valid Characters: All ASCII characters.
- Variable Length – This two dimensional bar code holds large amounts of data in a small area, while providing a high level of redundancy and error checking, if specified.

Sample

```
<STX>L
D11
1z00000000150100F1000000PDF417
121100000000100Barcode z
E
```

Result

Prints a normal, security level one, PDF-417 bar code with a 1:2 aspect ratio and best-fit rows and columns. The (bolded) bar code's data stream 1z00000000150100F1000000PDF417 decodes as follows:

Example Data	Explanation
F	1-character specifying a normal or truncated bar code (T to truncate, F for normal).
1	1-digit security level ranging from 0 to 8.
00	2-digit aspect ratio specified as a fraction, with the first digit being the numerator and the second digit the denominator. Use "00" for the default ratio of 1:2. Valid range is from "00" to "99."
00	2-digit number specifying the number of rows requested. Use "00" to let the printer find the best fit. Valid range is from "03" to "90". Row values less than 3 are set to 3, while row values greater than 90 are set to 90.

Example Data	Explanation
00	2-digit number specifying the number of columns requested. Use "00" to let the printer find the best fit. Valid range is from "01" to "30". Column values greater than 30 are set to 30.
PDF417	The data stream to be encoded.
<CR>	Terminates the data stream.

SYMBOL SETS

Single and Double Byte Symbol Sets

Use the symbol set commands to select the symbol sets (code pages) for your specific language needs.

- [Double Byte Sets](#)
- [Single Byte Sets](#)

Double Byte Sets

Doubled Byte Fonts Symbol Set Selections

Double Byte Character Map		
Character Map ID	TrueType Font	Description
B5	✓	BIG 5 (Taiwan) Encoded
EU	✓	EUC (Extended UNIX Code)
GB	✓	Government Bureau Industry Standard; Chinese (PRC); default
JS	✓	JIS (Japanese Industry Standard); default
SJ	✓	Shift JIS
UC	✓	Unicode (including Korean)

Single Byte Sets

Single Byte Symbols Set Selections:

Code Page Identifier		Font Format			Description
		MicroType		True Type	
Datamax-O'Neil	HP (PCL)	CG Triumvirate	CG Times		
AR	8V	X	✓	✓	Arabic-8
CP	3R	Part	✓	✓	PC Cyrillic
D1	11L	X	X		ITC Zapf Dingbats/100
D2	12L	X	X		ITC Zapf Dingbats/200
D3	13L	X	X		ITC Zapf Dingbats/300
DN	0D	Part	Part	✓	ISO 60 Danish / Norwegian
DS	10L	X	X		PS ITC Zapf Dingbats
DT	7J	✓	✓	✓	DeskTop
E1	0N	✓	✓	✓	ISO 8859/1 Latin 1
E2	2N	✓	✓	✓	ISO 8859/2 Latin 2
E5	5N	✓	✓	✓	ISO 8859/9 Latin 5
E6	6N	✓	✓	✓	ISO 8859/10 Latin 6
E7	12N	X	X	✓	ISO 8859/7 Latin/Greek
E9	9N	✓	✓	✓	ISO 8859/15 Latin 9
EG	12N	Part	✓	✓	ISO 8859/7 Latin/Greek
EH	7H	Part	✓	✓	ISO 8859/8 Latin/Hebrew
ER	10N	Part	✓	✓	ISO 8859/5 Latin/Cyrillic
FR	1F	Part	Part	✓	ISO 69: French
G8	8G	Part	✓	✓	Greek-8

Code Page Identifier		Font Format			Description
		MicroType		True Type	
Datamax-O'Neil	HP (PCL)	CG Triumvirate	CG Times		
GK	12G	Part	✓	✓	PC-8 Greek
GR	1G	Part	Part	✓	ISO 21: German
H0	0H	Part	✓	✓	Hebrew-7
H8	8H	Part	✓	✓	Hebrew-8
IT	0I	✓	✓	✓	ISO 15: Italian
L\$ ^[1]	14L	X	X	✓	HP4000 ITC Zapf Dingbats
LG	1U	✓	✓	✓	Legal
M8	8M	✓	✓	✓	Math-8
MC	12J	✓ ^[1]	✓	✓ ^[1]	Macintosh
MS	5M	✓	✓ ^[1]	✓ ^[1]	PS Math
p9 ^[1]	13U	✓	✓ ^[1]	✓ ^[1]	PC-858 Multilingual
PB	6J	Part	Part	✓	Microsoft Publishing
PC	10U	✓	✓	✓	PC-8, Code Page 437
PD	11U	✓	✓	✓	PC-8 D/N, Code Page 437N
PE	17U	✓	✓	✓	PC-852 Latin 2
PG	10G	Part	✓	✓	PC-851 Latin/Greek
PH	15H	✓	✓	✓	PC-862 Latin/Hebrew
PI	15U	Part	Part	✓	Pi Font
PM	12U	✓ ^[1]	✓ ^[1]	✓ ^[1]	PC-850 Multilingual
PR	10V	✓	✓	✓	PC-864 Latin/Arabic
PT	9T	✓	✓	✓	PC-8 TK, Code Page 437T
PU	9J	✓	✓	✓	PC-1004
PV	26U	✓	✓	✓	PC-775 Baltic

Code Page Identifier		Font Format			Description
		MicroType		True Type	
Datamax-O'Neil	HP (PCL)	CG Triumvirate	CG Times		
PX	12U	X	X		PTXT3000
PY	3Y	X	X	✓	Non-UGL, Generic Pi Font
R8	8U	✓	✓	✓	Roman-8
R9 ^[1]	4U	✓	✓ ^[1]	✓ ^[1]	Roman-9
SP	2S	✓	✓	✓	ISO 17: Spanish
SW	0S	✓	✓	✓	ISO 11: Swedish
SY	19M	X	X	✓	Symbol
TK	8T	X	X		Turkish-8
TS	10J	✓	✓	✓	PS Text
UK	1E	✓	✓	✓	ISO 4: United Kingdom
US	0U	✓	✓	✓	ISO 6: ASCII
U8	-	✓	✓	✓	UTF8
VI	13J	✓	✓	✓	Ventura International
VM	6M	✓	✓	✓	Ventura Math
VU	14J	Part	Part	✓	Ventura US
W1 ^[1]	19U	✓	✓	✓	Windows 3.1 Latin 1
WA	9V	✓	✓	✓	Windows Latin/Arabic
WD	579L	X	X	✓	Wingdings
WE ^[1]	9E	✓	✓	✓	Windows 3.1 Latin 2
WG ^[1]	9G	Part	✓	✓	Windows Latin/Greek
WL ^[1]	19L	✓	✓	✓	Windows 3.1 Baltic (Latv, Lith)
WN	9U	X	X		Windows
WO	9U	✓ ^[1]	✓ ^[1]	✓ ^[1]	Windows 3.0 Latin 1

Code Page Identifier		Font Format			Description
		MicroType		True Type	
Datamax-O'Neil	HP (PCL)	CG Triumvirate	CG Times		
WR ^[1]	9R	✓ ^[1]	✓	✓	Windows Latin/Cyrillic
WT ^[1]	5T	✓	✓	✓	Windows 3.1 Latin 5

[1] Contains the Euro currency symbol (€).


CONFIGURATION

The following configuration commands are supported. Each command is displayed as a table with a "Property" and "Value" column. The "property" shows an attribute of the command and the "value" either contains a value or an explanation. Here is the meaning of each "property" row:

Property	Value
Description	What the command does.
Value	the possible values for the command.
Type	the type of value possible: a list, an integer, a string, etc.
Default	the default value for the command in factory-configured printers.
Access Level	the user access required to change the command. Can be 1="user", 2="admin", or 3="itadmin" Interface and Supported describe the different ways this command can be viewed and/or changed
Web Page	if "yes", this command can be accessed from the printer web page (for network connected printers).
LCD	if "yes", this command can be accessed on the printer's LCD-panel menu system (for printers with a display).
SmartSystems	if "yes", this command can be accessed from Honeywell's SmartSystems device management utility

DPL Configuration Menu

DPL-specific configuration commands are accessed from Settings --> Languages --> DPL in the various printer menu systems. Here is a listing of all of the configuration commands.

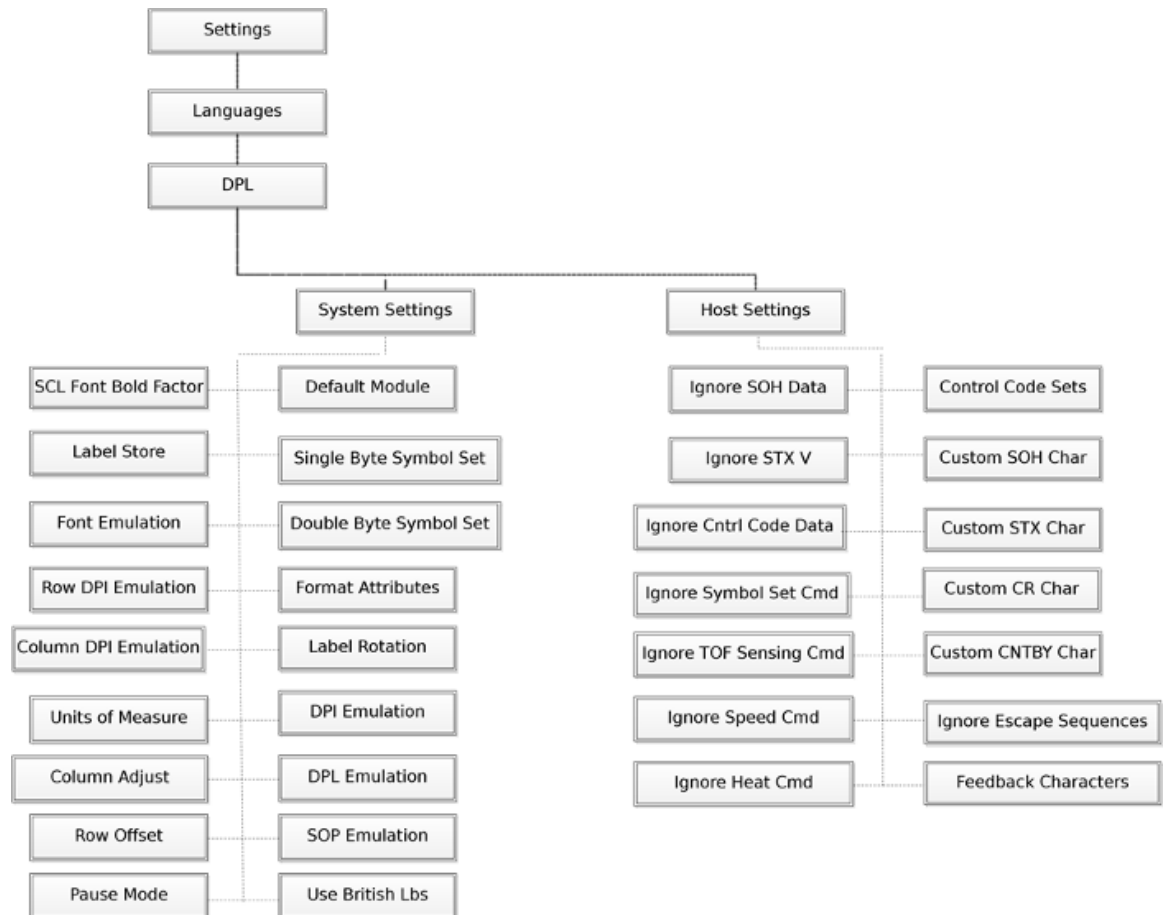

Note: More configurations can be added in the future.

System Settings

System settings affect how DPL reacts to incoming data. Note that these only affect DPL data streams. If the printer is in Language Autosense mode, then print jobs in other printing languages will respect their own system settings, not these DPL-specific settings.

Default Module

Property	Value
Description	Selects default module for storing and recalling in DPL mode.
Value	Module D Module G
Type	List
Default	Module D
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Single Byte Symbol Set

Property	Value
Description	Selects default single byte symbol set for DPL labels.

Property	Value
Value	AR - Arabic-8 CP - PC Cyrillic DN - ISO 60 Danish / Norwegian DT - DeskTop E1 - ISO 8859/1 Latin 1 E2 - ISO 8859/2 Latin 2 E5 - ISO 8859/9 Latin 5 E6 - ISO 8859/10 Latin 6 E7 - ISO 8859/7 Latin/Greek E9 - ISO 8859/15 Latin 9 EG - ISO 8859/7 Latin/Greek EH - ISO 8859/8 Latin/Hebrew ER - ISO 8859/5 Latin/Cyrillic FR - ISO 69: French G8 - Greek-8 GK - PC-8 Greek GR - ISO 21: German HO - Hebrew-7 H8 - Hebrew-8 IT - ISO 15: Italian L\$ - HP4000 ITC Zapf Dingbats LG - Legal M8 - Math-8 MC - Macintosh MS - PS Math P9 - PC-858 Multilingual PB - Microsoft Publishing PC - PC-8, Code Page 437 PD - PC-8 D/N, Code Page 437N PE - PC-852 Latin 2 PG - PC-851 Latin/Greek PH - PC-862 Latin/Hebrew PI - Pi Font PM - PC-850 Multilingual PR - PC-864 Latin/Arabic PT - PC-8 TK, Code Page 437T PU - PC-1004 PV - PC-775 Baltic PY - Non-UGL, Generic Pi Font R8 - Roman-8 R9 - Roman-9 SP - ISO 17: Spanish SW - ISO 11: Swedish

Property	Value
	SY - Symbol TS - PS Text U8 - UTF8
	UK - ISO 4: United Kingdom US - ISO 6: ASCII VI - Ventura International VM - Ventura Math VU - Ventura US W1 - Windows 3.1 Latin 1 WA - Windows Latin/Arabic WD - Wingdings WE - Windows 3.1 Latin 2 WG - Windows Latin/Greek WL - Windows 3.1 Baltic (Latv, Lith) WO - Windows 3.0 Latin 1 WR - Windows Latin/Cyrillic WT - Windows 3.1 Latin 5
Type	List
Default	PM
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Format Attributes

Property	Value
Description	Selects default format attributes for DPL labels.
Value	XOR Opaque Transparent
Type	List
Default	XOR
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Label Rotation

Property	Value
Description	Selects default label rotation for DPL labels.
Value	0 deg 90 deg 180 deg 270 deg
Type	List
Default	0 deg
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Label Store

Property	Value
Description	Selects default format of storing DPL labels.
Value	State and Fields Fields only
Type	List
Default	State and Fields
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Units of Measure

Property	Value
Description	Selects default units of measurement.
Value	Imperial Metric
Type	List
Default	Imperial
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Column Adjust

Property	Value
Description	Adjusts starting column position of the label.
Value	-300 to 300
Type	Numeric
Default	0
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Row Offset

Property	Value
Description	Sets vertical offset of the image for DPL labels.
Value	0 - 6000
Type	Numeric
Default	0
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Pause Mode

Property	Value
Description	Pause after every label.
Value	On Off
Type	List
Default	Off
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Use British Lbs

Property	Value
Description	Use symbol for the British Pound.
Value	Disable Enable
Type	List
Default	Disable
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Host Settings

Host settings configuration commands change the way DPL responds to the sending host system.

Feedback Characters

Property	Value
Description	Enables or disables the feedback ASCII hex characters.
Value	Disable Enable
Type	List
Default	Disable
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Control Codes

Control code configuration commands change the different control characters used to activate DPL commands.

Custom CNTBY Char

Property	Value
Description	Enter CNTBY control character.
Value	0 - 255 decimal
Type	Numeric
Default	94
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Custom CR Char

Property	Value
Description	Enter CR control character.
Value	0 - 255 decimal
Type	Numeric
Default	13
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Custom SOH Char

Property	Value
Description	Enter SOH control character.
Value	0 - 255 decimal
Type	Numeric
Default	1
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Custom STX Char

Property	Value
Description	Enter STX control character.
Value	0 - 255 decimal
Type	Numeric
Default	2
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes
SmartSystems	Yes

Ignore Commands

Ignore commands is a list of DPL commands which, if set to 'On', are ignored (they will not be processed if found in incoming data streams).

Ignore Cntrl Code Data

Property	Value
Description	Ignore Control Code Data.
Value	On / Off
Type	List
Default	Off
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes

Ignore Escape Sequences

Property	Value
Description	Ignore Escape Sequences.
Value	On / Off
Type	List
Default	Off
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes

Ignore Heat Cmd

Property	Value
Description	Ignore Heat Command.
Value	On / Off
Type	List
Default	Off
Access Level	1

Interface	Supported
Web Page	Yes
LCD	Yes

Ignore SOH Data

Property	Value
Description	Ignore SOH data.
Value	On / Off
Type	List
Default	Off
Access Level	1
Interface	Supported
Fingerprint	N/A
Web Page	Yes
LCD	Yes

Ignore Speed Cmd

Property	Value
Description	Ignore Speed Command.
Value	On / Off
Type	List
Default	Off
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes

Ignore Symbol Set Cmd

Property	Value
Description	Ignore Symbol Set Command.
Value	On / Off
Type	List

Default	Off
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes

Ignore TOF Sensing Cmd

Property	Value
Description	Ignore TOF Sensing Command.
Value	On / Off
Type	List
Default	Off
Access Level	1
Interface	Supported
Web Page	Yes
LCD	Yes

STX Kc Configuration Set

This command specifies the Power-up Configuration parameter values for the printer and is equivalent to using other system commands followed by the <SOH>U. This command is intended for easily configuring a custom setup, but NOT for dynamic configuration changes. Configuration commands are examined for differences relative to the current configuration, and have no impact when no differences exist. Printers will reset upon completion of a command stream containing parameter value changes. In any case, no commands should be sent to the printer until this reset is complete. Other command highlights include the following:

- These parameter values are equivalent to changing the respective menu settings and do not affect the factory default settings of the printer.
- If separated by a semi-colon (;), multiple parameter values may be sent in a single command stream; see sample below.
- All values are stored in Flash memory and remain in effect until new values are received or until factory defaults are restored.
- If system commands are sent that override the Power-up Configuration value(s), the Power-up Configuration value(s) will be restored the next time the printer is powered "On" or is reset.
- These parameters are the same as those found in the Menu System (display equipped models). The respective functions are documented in the appropriate Operator's Manual. Not all commands are effective on all printers.

Syntax

<STX>Kcaa1val1[:aalvall][;aanvaln]<CR>

Parameters

Where:

- aa1, aal, aan - Are two letter parameter names.
- val1, vall, valn - Are parameter values, with ranges appropriate for the associated parameter.

Sample

<STX>KcPA120;CL600;STC

Result

The sample above sets the Present Adjust to 120 dots, and the Sensor Type to Continuous with a label length of six inches.

The following tables lists the configuration set (<STX>Kc) commands that will be supported:

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Backup After Print	BA	Y, N	Y = Enabled, N = Disabled	N/A	This command determines the timing of the label back up positioning when the present distance is set and the GPIO option or Present Sensor option (including Peel and Present) is enabled. When enabled, the printer immediately backs up the label after the applicator-issued start of print signal is received or the label is removed, resulting in faster throughput. If disabled, the printer will not initiate repositioning until the next label is ready to print (may help prevent the curling of the label edge).
Backup Delay	BD	0 – 255	1/50 second	N/A	This command sets a time delay for the retraction of a presented label in one-fiftieth (1/50) of a second increments.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Backup (Reverse) Speed	BS or bS	alpha character	Model specific ranges	N/A	This command controls the rate of label movement during backup positioning for start of print, cutting or present distance.
British Pound	BP	Y, N	Y = Enabled, N = Disabled	N/A	This command, when enabled, will automatically switch from the Number symbol (#) found at 0x23 (default PC-850 Multilingual Symbol Set) to the British Pound symbol (£) at 0x9C.
Column Adjust Fine Tune	CF	+ / – dots	Resolution specific	N/A	This command fine-tunes the Column Offset setting by shifting both the horizontal start of print position and the Label Width termination point to the right in dots to compensate for slight mechanical differences sometimes evident when multiple printers share label formats.
Column Offset	CO	0 – 9999	1/100 in.	Cnnnn	See Cnnnn for command details.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Comm Heat Commands	CH	Y, N 1, 0	Y = Enabled, N = Disabled 1 = Enabled, 0 = Disabled	N/A	This command causes the printer to ignore DPL Heat commands. Ignore by setting value to N. Process by setting value to Y (default). When set to ignore Heat commands values are controlled via the menu setting.
Comm Speed Commands	CS	Y, N 1, 0	Y = Enabled, N = Disabled 1 = Enabled, 0 = Disabled	N/A	This command causes the printer to ignore DPL speed commands. Ignore by setting value to N. Process by setting value to Y (default). When set to ignore speed values are controlled via the menu setting.
Comm TOF Commands	CT	Y, N	Y = Enabled, N = Disabled	N/A	This command causes the printer to ignore DPL TOF (Gap, Continuous, and Reflective) commands. Ignore by setting value to N. Process by setting value to Y (default). When set to DPL TOF values are controlled via the menu setting.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Continuous Label Length	CL	0 – 9999	1/100 in.	<STX>c	See <STX>c for command details.
Control Codes	CC	S, 1, 2	S = Standard, 1 = Alternate, 2 = Alternate-2	N/A	This command, depending upon printer type, allows a change to the prefix of the software commands interpreted by the printer.
Cutter Equipped	CE	A/Y, E, N/D A, E/Y, N	A or Y = Auto, E = Enabled, N or D = Disabled A = Auto, E or Y = Enabled, N = Disabled	<STX>V	This command allows the printer to sense the cutter option. "A" - automatically senses device presence; if undetected, no error is generated. "E" - enables the device, where its presence must be detected; otherwise, a fault is generated. "N" - disables device detection. One of these values is returned in response to <STX>KcQQQ. Note that alternate values are accepted for backward compatibility as follows: "Y" is equivalent to "A".

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Darkness	DK	1 – 64	N/A	N/A	This command adjusts the length of the print head strobe to fine tune the HEAT setting.
Default Module	DM	D, G A, B	Module Letter	<STX>X	See <STX>X for command details.
Disable Symbol Set Selection	NS	Y, N	Y = Enabled, N = Disabled	N/A	This command prevents the <STX>y and y commands from changing the default single-byte symbol set. When enabled, DPL Symbol Set commands are ignored.
Double Byte Symbol Set	DS	2-Byte alpha character	AA – ZZ, printer resident symbol set	<STX>y, ySxx	See <STX>y or ySxx for command details.
DPI Emulation	DE	152, 200, 300, 400, 600	Dots per inch	N/A	This command allows printers with higher resolutions to emulate lower print resolutions
End Character	EN	D	N/A	N/A	This command terminates a <STX>Kc string.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
ESC Sequences	ES	Y, N	Y = Enabled, N = Disabled	N/A	This command allows data containing invalid ESC control code sequences to be processed (helpful because some systems send a "banner" to the printer). When set to "Disabled," ESC sequences are ignored and the data is processed. Bitmapped font downloads are disabled in this mode.
Fault Handling	FH	L, D, R, B	L,D,R,B	N/A	This command determines the level of user intervention and the disposition of the label being printed when a fault condition (ribbon out, media out, etc.) occurs.
Feed Speed	SS or sS	Alpha character	Model specific ranges	Sa	This command controls the rate of label movement between printing areas;
Feedback Mode	FM	Y, N	Y = Enabled, N = Disabled	<STX>a	See <STX>a for command details.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Font Emulation	FE	0, 1, 2	0 = No Substitution 1 = Sub CG Times SA0 2 = Sub User S50	N/A	–This command allows font substitution for all internal fonts, allowing a new default font to be defined without changing the host DPL data streams. Selecting a default font that supports a desired character set could match with third party software to print native characters without modifying the PC drivers. In other words, match the PC font with the Printer Font then no interpretation would be required by driver or printer. Depending on host drivers, the user may have to disable Symbol Set commands and modify the Default Symbol set.
Format Attributes	FA	X, O, T	X = XOR, O = Opaque, T = Transparent	An	See the "An" command for details.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
GPIO Equipped	GE	A, V, N, 2	A = Applicator, V = Verifier, N = Disabled, A = Applicator2	N/A	This command is used to interface the printer to external controlling devices.
Head Cleaning	HC	0 – 9999	Inches (or centimeters) multiplied by 1000	N/A	This command controls the print head cleaning routine. The entered value specifies the inch (or centimeter) count to reach before prompting a print head cleaning. If the number specified is exceeded three times, the printer will fault until cleaning is initiated.
Heat	HE	0 – 30	N/A	Hnn	See Hnn for command details.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Ignore Control Codes	IC	Y, N 1, 0	Y = Enabled, N = Disabled 1 = Enabled, 0 = Disabled	N/A	This command allows the user to remove control codes (< 20 Hex) in the data field. The selected line terminator is processed. When enabled, DPL Control Code (SOH, STX, CR, ESC, and ^) characters are removed from the data string. (Note that some fonts do have printable characters in this range and they will not be printed when enabled.)
Input Mode	EM	0, 1, 3, 9	0 = DPL, 1 = Line, 3 = PL-Z, 9 = Auto	N/A	This command determines the data processing mode.
Label Rotation	LR	Y, N	Y = Rotate 180 N = None	N/A	Command sets label rotation, allowing formats to be flipped 180 degrees.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Label Store	LM	F, S	F = Fields, S = States & Fields	N/A	This command selects the level of stored format recall to include the label-formatting command fields, or the label-formatting command fields and the printer state.
Label Width	LW	0075 – head width	1/100 inch	<STX>KW	This command sets the maximum limit for the printable width. Objects extending beyond this limit will NOT print;
Maximum Length Ignore	SM	0, 1	0 = Normal processing, 1 = Ignore	N/A	This command controls recognition of the <STX>M command.
Maximum Length	ML	0 – 9999	1/100 inch	<STX>M	See <STX>M for command details.
Media Type	MT	D, T	D = Direct, T = Thermal Transfer	N/A	This command selects the printing method: Direct Thermal for use with heat sensitive media or Thermal Transfer for use with media requiring a ribbon to create an image.
Pause Mode	PM	Y, N	Y = Enabled, N = Disabled	<STX>J	See <STX>J for command details.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Peel Mode	PE	Y, N	Y = Enabled, N = Disabled	N/A	This command, when enabled, specifies that a Feed operation be prevented when the label is presented and not removed.
Present Adjust Fine Tune	PJ	+ / – dots	Dots (model specific)	N/A	This command fine-tunes the Present Distance setting in dots to compensate for slight mechanical differences sometimes evident if multiple printers share label formats.
Present Distance	PD	0 – 400	1/100 inch	<STX>Kf	This command sets the label stop position past the start of print. When the next label format is received, the printer will automatically backfeed to the start position. If the present distance is set to zero, the printer will operate without reversing.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Present Sensor Equipped	PS	A/Y, E, N/D	A or Y = Auto, E = Enabled, N or D = Disabled	<STX>V	This command allows the printer to sense the present sensor option. A (or Y) - automatically senses device presence; if undetected, no error will be generated. E - enables the device, where its presence must be detected; otherwise, a fault is generated. N or D - disables device detection. See <STX>V for command details.
Print Contrast	PC	0 – 64	N/A	N/A	This command adjusts the relative print edge (gray) component of the print quality, which allows fine-tuning for specific media/ribbon mix.
Print Speed	pS	Alpha character	Model specific ranges	Pa	See command Pa for details.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Query Configuration	QQ	Q, K	N/A	N/A	<p>This command requires a parameter of either K or Q.</p> <p>K causes the printer to respond with the Printer Key, used for generating Upgrade Codes. A parameter value of Q causes the printer to respond with the current configuration settings. The <STX>Kc response command stream format is sent to the host computer via the same port as the query containing all parameters controlled by the <STX>Kc command, and may be used for restoring the printer's configuration or for configuring other printers.</p>

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Rewinder Adjust	RR	-xx, +yy	Applied torque, where -30 to +15 is the valid range.	N/A	This command changes the torque applied by the powered rewinder, in percentage points of the nominal force, to minimize TOF registration drift (sometimes evident when using small or narrow media).
Rewinder Equipped	RM	A/Y, E, N/D	A or Y = Auto, E = Enabled, N or D = Disabled	N/A	This command allows the printer to sense the powered internal rewind option. A (or Y) - automatically senses device presence; if undetected, no error is generated. E - enables the device, where its presence must be detected; otherwise, a fault is generated. N or D - disables device detection.
Ribbon Low Diameter	RL	100 – 200	1/100 in.	N/A	This command sets the threshold for a low ribbon indication, where nnnn is the diameter in hundredths of inches.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Row Adjust Fine Tune	RF	+ / – dots	Resolution specific	N/A	This command shifts the vertical start of print position in dots upward or downward.
Row Offset	RO	0 – 9999	1/100 in. Rnnnn	Rnnnn	See Rnnnn for command details.
Save As Filename	SF	Alphanumeric string	Up to 16 characters	N/A	This command, which may be sent separately or included as the last command in an <STX>Kc command string, saves the effective printer configuration to a file in Flash memory with a .dcm file extension.
Scalable Font Bolding	FB	1 – 36	N/A	N/A	This command sets a bolding factor to fine tune scalable fonts, where one causes the least amount of bolding and thirty-six the most (default value is 8).
Sensor Type	ST	G, C, R	G = Gap (edge), C = Continuous, R = Reflective	<STX>e, <STX>r, <STX>c	Sets sensor type.
Single Byte Symbol Set	AS	2-Byte alpha character	AA – ZZ, printer resident symbol set	<STX>y, ySxx	This command allows for a default single-byte symbol set.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Slew Speed	FS	Alpha character	Model specific ranges	<STX>KZSx	
Stop Location	SL	A, H, P, C, T, N	N/A	N/A	This command sets the label stopping (and in certain cases the starting) location.
TOF Precedence	TP	Y, N	Y = Enabled, N = Disabled	N/A	This command instructs the firmware to stop printing at the first top of form mark it detects. The default ("No") prints all of the data (traversing the top of form as necessary) then slews to the next TOF.
Unit of Measure	UM	M, I	M = Metric, I = Imperial	<STX>m, <STX>n	See <STX>m (metric) or <STX>n (imperial) for command details.
RFID	RI	A, B, D, E, L, M, N, P, R, S, T, U, V, W	Various	N/A	This command configures the optional RFID interface module
Dotcheck at Powerup	DC	Y, N	Y = Enabled, N = Disabled	N/A	Dotcheck at powerup
Dotcheck Schedule	DD	Y, N	Y = Enabled, N = Disabled	N/A	Dotcheck schedule
Dotcheck Hour	DH	0-23	Hour	N/A	Dotcheck hour

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Network Configuration	NE	Various	Various	N/A	The enhanced configuration two character identifier for the Network Configuration Parameters will be 'NE' for Network Ethernet.
Serial Port	SP	xyz	Various	N/A	This command configures the serial communication port(s).
GPIO Equipped	GE	A, V, N, 2	A = Applicator, V = Verifier, N = Disabled, A = Applicator2	N/A	This command is used to interface the printer to external controlling devices
GPIO Error Pause	GP	E, D	E = Enabled, D = Disabled	N/A	This command enables or disables the printer from sending a service required fault to the GPIO output.
GPIO Slew	GS	0 – 4 0 = Standard,	1 = Low Pulse, 2 = High Pulse, 3 = Active Low, 4 = Active High	N/A	This command sets the GPIO slew function and control.
End Of Print	EP	1, 2, 3, 4	1 = Low Pulse, 2 = High Pulse, 3 = Active Low, 4 = Active High	N/A	This command defines the signal output used to signify the End of Print (EOP) process.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Ribbon Low Signal	RS	3, 4	3 = Active Low, 4 = Active High	N/A	This command sets the signal output type for the Ribbon Low Diameter condition when using the optional GPIO
Start of Print	EQ	3, 4	3 = Active Low, 4 = Active High	N/A	This command defines the type of signal input required to control the Start of Print (SOP) process.
Empty Sensor Level	EV	0 – 255	N/A	N/A	This command sets threshold value for the "Empty" media sensor Parameter:
Gain Reflective Value	GR	0 – 31	N/A	N/A	This command sets the sensitivity of the reflective media sensor.
Gap / Mark Value	GM	0 – 255	N/A	N/A	This command sets threshold value for the media sensor's "gap" or "mark" parameter.
Mark Value	MV	0 – 255	N/A	N/A	This command sets threshold value for the reflective media sensor's "mark" parameter.

Parameter Name	Parameter	Value / Range	Units / Interpretation	Command Equivalent	Description
Paper Empty	PO	0 – 9999	1/100 inch	N/A	This command sets the length of travel before an out of stock condition is declared.
Paper Value	PV	0 – 255	N/A	N/A	This command sets threshold value for the media sensor's "paper" parameter.
Parallel Direction	PP	xz	N/A	N/A	This command controls the parallel port communications settings
Reflective Paper Value	RV	0 – 255	N/A	N/A	This command sets the threshold value for the reflective media sensor's paper parameter.
Sensor Gain Value	SG	0 – 32	N/A	N/A	This command sets the control of the voltage to the LED emitter of the Media Sensor.
Process SOH (Data)	IP	E, Y, D, N	Enable/Disable	N/A	Whether to allow SOH processing.
STX-v	SV	Y, N	Y = Enabled, N = Disabled	N/A	Whether to allow STX v processing.

SYSTEM BEHAVIOR

This section describes operational behaviors and differences from Datamax-O'Neil printers.

- [Configuration Persistence](#)
- [Error Message Behavior](#)
- [Font Downloading Behavior](#)
- [Head Closure / Power Up Behavior](#)
- [Internal Drive Mapping](#)
- [Label Length Behavior](#)
- [Pause / Cancel Label behavior](#)
- [Printer Restart Behavior](#)
- [Stop Location Behavior](#)

Configuration Persistence

DPL will use the default Honeywell printer behavior and save configuration values when they are changed.

Summary

Configuration Persistence

Note:

- C_structures - RAM based, persistent during power up session, lost at power down, language unique
- M_structures - RAM based, temporary for active print job, lost with next job, language unique
- RAM database - RAM based, lost at power down, not available in Honeywell, language unique or shared
- NV database - Nonvolatile permanent memory, language unique or shared, power-up configuration

Configuration Kc commands:

- Value written into NV, then loaded into data C_structures at power up or soft reset
- Persistent through power down
- NV database Changes checked and taken into C_structures at job initialization
- Takes effect on any next job for native command immediately (asynchronously)
- Native parameters affected by other languages because they are shared
- Changes are visible in User Interfaces

System STX commands:

- Value goes into C_structures, and into RAM database (Datamax-O'Neil), NV database (Honeywell)
- Persistent during powered up session, lost (Datamax-O'Neil), preserved (Honeywell) at power down
- Effect (if any) takes place immediately, asynchronously
- Native parameters affected by other languages because they are shared
- NV database changes reflected in C_structures at beginning of each job
- C_structures are used to initialize job parameters (M_structures) at beginning of job
- M_structures are modified and used while parsing and rendering
- Changes are visible in User Interfaces

Label Commands– Controls image format, (format spec. commands inside label format)

- Values written into language specific M_structures during parsing of label commands
- Persistent with the label job, lost at next label job initialization
- M_structures affect immediate formatting but physical effect is delayed till printing
- Changes are not visible in User Interfaces

Error Message Behavior

Honeywell/Intermec Printer

System error message behavior shall follow Honeywell/Intermec printer behavior, and handles general media errors similar to the reference DPL printer.

Error messages shall be notified through typical means as with all printers via LED, LCD (UI), printer web page.

Notable difference from reference printer:

1. If the printer is configured for Direct Thermal media, and Ribbon is physically installed, an error message "Ribbon Installed" will be triggered.

Datamax-O'Neil Printer

1. Ribbon Fault: - No Motion detected for configured distance during label print or feed operations and configured for Thermal Transfer mode of operation. No faults reported is in Direct Thermal Operation.
2. TOF Faults: - Printer did not reach the gap or black mark within the configured Maximum label length setting.
3. Out of Media - TOF Sensor detected reading below Paper Out threshold configuration setting during label print or feed operation.

Error Messaging LED's

- Solid Green - Ready
- Flashing Green - Receiving data
- Solid Red - TOF Error
- Flashing Red - Out of Media (Paper or Ribbon)
- Solid Orange - Printer Paused
- Flashing Orange - Printer Label Taken sensor blocked.

Display equipped printers output appropriate corresponding messages.

Font Downloading Behavior

Honeywell/Intermec Printer

Fonts can be downloaded using the respective DPL font download/installation commands

Fonts downloaded via means, other than DPL command, will not be accessible by DPL font IDs.

E.g. Non-DPL command means of installing fonts

- USB menu selection (for printers with LCD).
- Printer web page.
- Via host applications such as PrintSet.

Datamax-O'Neil Printer

DO downloaded fonts require use of a storage location and unique access DPL access ID descriptors to be appended to the beginning of all fonts data to be download. The label scripts then utilize the ID along with access method to utilize the fonts. DO printers not support copying raw files directly. All saved data is parsed through the host port access and labeled accordingly.

Head Closure / Power Up Behavior

Printer shall adapt Honeywell printer native behavior regardless if it is in DPL Language mode or not.

Internal Drive Mapping

The drive mapping below applies to all DPL commands that store files in printer.

DPL Drive	IN Path	Notes
G:	/home/user	Persistent storage
X:	/home/user	Persistent storage
Y:	/home/user	Persistent storage
D:	/tmp	Volatile storage, cleared upon power cycle
H:	/media/sda1	USB memory

Label Length Behavior

Terminology used here:

- Label Length - specified by <stx>KcCL, or overridden by <stx>c command.
- Image Length - imaged area of the label (includes top/ bottom margins)
- Print Length - physical label length (motion length excluding stop distance)

Continuous Paper:

1. Fixed Length:

- 1A. If image length is smaller or equal than label length specified then Honeywell print is the same as Datamax-O'Neil print.
- 1B. If image length is longer than label length specified then in Phase1 there will be the following difference:
 - Datamax-O'Neil prints the entire image and fills in white space up to the nearest multiple of label length. (Ex: image length 5", label length 3", print length 6" with 1" white space)
 - Honeywell clips label at 3". User required to set label length to 6" to get same result as Datamax-O'Neil.

Note: Instruct Honeywell DPL user to set the desired print length as specified label length.

2. Variable Length:

- 2A. If image length is larger or equal than label length specified:
 - Datamax-O'Neil expects the label length to be set to 1 (or less than 20) to produce variable length label equal to image size.
(Datamax-O'Neil: If the label length specified is larger than 20, then print will be as in 1B)
 - Honeywell (in continuous variable mode) will truncate print at label length.
- 2B. If image length is smaller than label size:
 - Datamax-O'Neil: The print will be the same as 1A
 - Honeywell: (in continuous variable mode) The print will be the length of the image.

Note: Instruct Honeywell DPL user to set database label length to be larger than the actual image size, then leave Datamax-O'Neil script label length set to 1 when printing the label.

Gap/Mark Paper:

- Honeywell truncates image according to Label Length but Datamax-O'Neil printers do not. Datamax-O'Neil user needs to make sure Label Length does not constrain the print length.
- Honeywell and Datamax-O'Neil print the same over gaps. "Clip" is Honeywell terminology for Datamax-O'Neil TOF Precedence or truncation.

Large Bar Code Printing Behavior

Very large bar codes will not print if they exceed available memory. This typically occurs when using height and width multipliers in the "A-Z" or "a -z" range. In most cases these bar codes would print outside the label boundary anyway so they would not be scannable if printed.

Label Width Behavior

KcLW write command will allow minimum $\frac{3}{4}$ " width and maximum to print head width.

LW read will not check minimum but limit maximum to print head width.

KcQQQ will return database value up to print head width.

Label width can be set via menu but Honeywell printers have a minimum width below which the printer will not print.

Pause / Cancel Label behavior

Honeywell/Intermec Printer

Printers in DPL language mode shall behave similar to reference DPL printers in the behavior of Pause and Cancel operations.

Datamax-O'Neil Printer - Pause

If the user pauses while printing, the current label being printed shall complete before the printing pauses.

A printer in paused state shall resume from last operational state prior to being paused.

If the printer has jobs to be printed the UI will prompt for Cancel or Resume and for non display resume from paused state or for non-display printers if button depression for 5 seconds or more will automatically cancel the current batch of label and proceed to the ready state if not faulted.

Non display printer operation

Can be invoked by sent via host interface DPL immediate command or UI button press.

1. If Printer is Idle: Printer will be put into paused state; No printing or print operations will be enabled.
2. If Printer is Paused, Printer go to Ready / Idle state and commence print operation if print jobs were interrupted
3. If printer is Paused and print jobs suspended via pause operations if UI button is depressed for 3 seconds the current label or batch of labels are purged.

Display printer operation

Can be invoked by sent via host interface DPL immediate command or UI button press.

1. If printer is Idle: Printer will be put into paused state; No printing or print operations will be enabled.
2. If Printer is Paused, Printer go to Ready / Idle state and commence print operation if print jobs were interrupted

Datamax-O'Neil Printer - Cancel

Cancel request received in the Paused state will purge any label jobs in the current batch and enter the ready state. No additional labels shall be printed.

Cancel request received (via immediate command) in the idle state will place the printer into the paused state.

Cancel request received while printing will pause the printer, same as pause, and purge any label in the current label batch. No additional labels shall be printed from the current batch when the printer resumes operation via the pause mode functionality described above.

Printer Restart Behavior

Printer needs a restart only on specific Kc commands as indicated in command specification.

Webpages will require reset for parameters corresponding to Kc commands that require reset.

Stop Location Behavior

T – sets print mode to TEAR, leaves present distance (rest adjust) alone.

- KcQQQ returns SLT

A – leaves print mode alone, sets present distance (rest adjust) to AUTO (zero)

- KcQQQ returns SLA (if still in present distance Auto)
- H, C, P, N are ignored

COMMANDS NOT SUPPORTED

Some commands in Datamax-O'Neil DPL will not be supported in this version of DPL. The non-supported commands are listed here, by section.

- [Immediate Commands](#)
- [Label Formatting Commands](#)
- [Extended System Commands](#)
- [Symbol Sets](#)

Immediate Commands

The following Immediate (<SOH>) commands will not be supported:

Commands	Description
SOH D	SOH Shutdown
SOH S	Set Printer State
SOH U	Reset
SOH v	Send Internal Build String

Label Formatting Commands

The following extended system commands will not be supported:

Commands	Description
S	Set Feed Speed
p	Set Backfeed Speed
Format Record Command	Fill Patterns

Label Formatting Commands

The <STX>L command switches the printer from the System-Level Processor to the Label Formatting Processor. All commands following the <STX>L are interpreted as label formatting commands, and can be used to override default parameter values. Selectable parameter value defaults may be also reassigned via the Setup Menu, as defined in the corresponding Operator's Manual. Label formats that contain no commands overriding printer default values will assume those defaults.

- [A Set Format Attribute](#)
- [B Bar Code Magnification](#)
- [C Set Column Offset Amount](#)
- [D Set Dot Size Width and Height](#)
- [E Terminate Label Formatting Mode and Print Label](#)
- [e Recall Printer Configuration](#)
- [F Advanced Format Attributes](#)
- [G Place Data in Global Register](#)
- [H Enter Heat Setting](#)
- [J Justification](#)
- [M Select Mirror Mode](#)
- [m Set Metric Mode](#)
- [n Set Inch \(Imperial\) Mode](#)
- [P Set Print Speed](#)
- [Q Set Quantity of Labels to Print](#)
- [R Set Row Offset Amount](#)
- [r Recall Stored Label Format](#)
- [s Store Label Format in Module](#)
- [T Set Field Data Line Terminator](#)
- [U Mark Previous Field as a String Replacement Field](#)
- [X Terminate Label Formatting Mode](#)
- [y Select Font Symbol Set](#)
- [z Zero \(Ø\) Conversion to "0"](#)
- [+ | > | \(Make Last Field entered an Increment Field](#)
- [– | < | \) Make Last Field entered a Decrement Field](#)
- [STX S Recall Global Data and Place in Field](#)

- [STX T Print Time and Date](#)
- [^ Set Count by Amount](#)

S Set Feed Speed

This command controls the rate at which the label is moved through non-printed areas. The setting remains unchanged unless another feed speed command is received or until the printer is reset.

Syntax

<Sa>

Parameters

Where:

- a - Is a single alpha character representing a speed.
- h - Is Dot Height multiplier 1, 2, or 3.

Sample

a - Is a single alpha character representing a speed.

```
<STX>L
SE
141100001000100LABEL1
E
<STX>L
1411000010001000LABEL2
E
```

Result

The sample above sets a 3 IPS feed speed and prints two labels, with the same feed speed for both.

p Set Backfeed Speed

This command, typically used in conjunction with the Cut or Peel and Present operations, controls the rate at which the labels will reverse to align to the next start of print position. The setting remains in effect until another backfeed speed command is received or until the printer is reset.

Syntax

<pa>

Parameters

Where:

- a - Is a single character representing a speed.

Bar Code Format Record Commands

The following bar code format record commands are not supported.

Command	Description
K	Plessey
T	Telepen
v	FIM
W1m/W1M	Australia Post 4-State Bar Code
W1t	TCIF Linked 3 of 9 (TLC39)

K Plessey

Syntax

N/A

Behavior

Valid Characters: 0-9

Valid bar widths: The expected ratio of wide to narrow bars can range from 2:1 to 3:1.

If a + character is the last data character, an additional MSI checksum will be added to the bar code in place of the + character.

Sample

```
<STX>L
D11
1K000000015010001234567890
121100000000100Barcode K
E
```

Result

Prints a Plessey bar code with a wide to narrow bar ratio of 3:1.

Behavior

Valid Characters: 0-9

Valid bar widths: The expected ratio of wide to narrow bars can range from 2:1 to 3:1.

If a + character is the last data character, an additional MSI checksum will be added to the bar code in place of the + character.

Sample

```
<STX>L
```

D11
1K000000015010001234567890
121100000000100Barcode K
E

Result

Prints a Plessey bar code with a wide to narrow bar ratio of 3:1.

W1t TCIF Linked 3 of 9 (TLC39)

Syntax

<a>,<W1>,<t>,<c>,<d>,<eee>,<ffff>,<gggg>,<hhhhh>,<;>,<ii...i>

Parameters

Where:

Field	Valid Inputs	Meaning
a	1,2,3, and 4	Rotation
W1	W1	Fixed value, extended bar code set
t	t	Selects TLC39 bar code
c	1 to 9, A to Z, and a to z	Wide bar of Code 39, ratio of wide to narrow must be between 2:1 and 3:1.
d	1 to 9, A to Z, and a to z	Narrow bar of Code 39
eee	001 to 999	Height of Code 39
ffff	0000 to 9999	Label position, row
gggg	0000 to 9999	Label position, column
hhhhh	ECI Data	Six digit ECI number
;	Fixed	Parses data. (If the seventh character is not a semi colon then only a six-digit code 39 will print.)

Field	Valid Inputs	Meaning								
i...i	S/N Data	<p>Up to 25 alphanumeric serial number characters to be encoded in the MicroPDF417 symbol. This symbol is fixed at four columns. The number of rows is determined by the amount of data, as follows:</p> <table><tr><th>Character Count</th><th>Row Count</th></tr><tr><td>1-14</td><td>4</td></tr><tr><td>15-22</td><td>6</td></tr><tr><td>23-25</td><td>8</td></tr></table>	Character Count	Row Count	1-14	4	15-22	6	23-25	8
Character Count	Row Count									
1-14	4									
15-22	6									
23-25	8									

The link flag is the character "T" in Code 39 without a start/stop indicator. The flag location is based on the ECI code location, length, and height. The location of the MicroPDF417 symbol is based on the location of ECI bar code. The symbol's module width and height are fixed at the default.

Behavior

Valid Characters: All ASCII characters.

Variable Length: Encodes a 25-character alphanumeric number in MicroPDF417 symbol.

Specified Length: Encodes a six-digit sequence in a standard Code 39 followed by a link flag character in Code 3 of 9.

Sample

```
<STX>L
D11
1Wt0000001500150123456;ABCD12345678901234
1911A0801300170A1B2C3DAAA
121100000000100Barcode W1t
E
```

Result

Prints a TLC39 bar code.

T Telepen

Syntax

N/A

Behavior

Valid Characters: ASCII character set (0-127)

Variable Length

Valid bar widths: The fourth character of the record is the width of the narrow bar in dots. All other bars are a ratio of the narrow bar (2 times, 3 times, and 4 times the narrow bar width).

Sample

```
<STX>L  
D11  
1T0000000150100ABCDEF  
121100000000100Barcode T  
E
```

Result

Prints a Telepen bar code.

v FIM

Syntax

N/A

Behavior

Valid Characters: A, B, C, or D

Length: 1 character

Valid bar widths: The width and height multiplier works the same as for fonts on this bar code.

This bar code is used to display the Facing Identification Mark (FIM) that is carried on certain types of letter mail for the U S Postal Service:

FIM A: Courtesy reply mail with Postnet.

FIM B: Business reply, penalty or franked mail without Postnet.

FIM C: Business reply, penalty or franked mail with Postnet.

FIM D: OCR readable mail without Postnet (typically for envelopes with a courtesy reply window).

Sample

```
<STX>L  
D11  
1v0000000150100A  
121100000000100Barcode v  
E
```

W1m / W1M Australia Post 4-State Bar Code

Label Format Bar Code ID to print barcode in the Australia Post System.

Syntax

<a>,<W1>,<m>,<c>,<d>,<eee>,<ffff>,<gggg>,<hh>,<iiiiiii>,<j...j>

Parameters

Where:

Field	Valid Inputs	Meaning
a	1,2,3, and 4	Rotation
W1	W1	Fixed value, extended bar code set
m	m and M	Lowercase selects the Australia Post bar code, and uppercase selects the Australia Post bar code with a human readable field.
c	0	Not used.
d	0	Not used.
eee	000	Not used.
ffff	0000 to 9999	Label position, row
gggg	0000 to 9999	Label position, column
hh	11, 87, 45, 92, 59, 62,44	Format Control Code (FCC): FCC Value Resulting Format 11 Standard Customer Bar Code 87 Routing Bar Code 45 Reply Paid Bar Code 92 Redirection Bar Code 59 Customer Bar Code 2 62 Customer Bar Code 3 44 Reserved
iiiiiii	00000000-99999999	8-digit Delivery Point Identifier (DPID)

Field	Valid Inputs	Meaning
j...j	0-9, a-z, A-Z, #, space	Optional – Customer information, Bar Code 2 or 3 (Bar Code 2 has a maximum of 8 digits or 5 alphanumeric characters, while Bar Code 3 has a maximum of 15 digits or 10 alphanumeric characters), where if all numeric then data will be encoded in N-type; otherwise, C-type will be used.

Behavior

Length: 37, 52, or 67 bars

Usage: This symbol is used for processing mail in the Australia Post System. The symbol is 37, 52 or 67 bars in length, and the height and ratios are fixed according to the specification (see "Customer Barcoding Technical Specifications" from Australia Post for more information).

Sample

```
<STX>L
D11
1WM00000005000501139987520
E
```

Result

Prints a standard Customer Bar Code using a DPID of "39987520". Note that the human readable shows the format control code, sorting code and the generated Reed Solomon error correction parity values.

Format Record Commands

Scalable Fonts

Microtype, Monotype, and TrueType (.TTF) Scalable Font file formats are supported. The eee field identifies the scalable font, and data type – normal (binary) or Hex ASCII. Uppercase S or U – binary, lowercase u – Hex ASCII. Values S00 to S9z, and U00 to U9z (u00 to u9z), select a scalable font. S00, S01 and SAx are used for the standard internal (resident) fonts.

Syntax

```
abcd eee ffff gggg jj...j <CR>
```

Parameters

Where:

Field	Valid Inputs	Meaning
a	1, 2, 3 and 4	Rotation
b	9	Font
c	1 to 9, A to Z, and a to z	Width Multiplier
d	1 to 9, A to Z, and a to z	Height Multiplier
eee	000	N/A
ffff	0000 to 9999	Row
gggg	0000 to 9999 Dependent upon printer.	Column
jj...j	Valid ASCII character string up to 255 characters, followed by a termination character.	Data

Behavior

Single and Double Byte Character Font Mapping

Font Name	Character Mapping	Font Size Specifier (eee Height)	Point Size
CG Triumvirate Bold Condensed	Single Byte	S00	scalable
CG Triumvirate	Single Byte	S01	scalable
CG Times	Single Byte	SA0	scalable
CG Times Italic	Single Byte	SA1	scalable
CG Times Bold	Single Byte	SA2	scalable
CG Times Bold Italic	Single Byte	SA3	scalable
Gothic B Kanji	Double Byte (Binary)	U40	scalable
Gothic B Kanji	Double Byte (Hex ASCII)	u40	scalable
GB Simplified Chinese	Double Byte (Binary)	UC0	scalable
GB Simplified Chinese	Double Byte (Hex ASCII)	uC0	scalable
Korean Hangul	Double Byte (Binary)	UH0	scalable
Korean Hangul	Double Byte (Hex ASCII)	uH0	scalable

Font Name	Character Mapping	Font Size Specifier (eee Height)	Point Size
User-downloaded typeface	Single Byte (Binary)	S50 - S5z..., S90 - S9z	scalable
User-downloaded Typeface	Double Byte (Binary)	U50...,U5z..., U90...U9z	scalable
User-downloaded typeface	Double Byte (Hex ASCII)	u50...,u5z..., u90...u9z	scalable

Scalable Font 00: CG Triumvirate Bold Condensed (Resident)

CG Triumvirate Bold Condensed. Single Byte Scalable Font ID S00. This is a resident embedded Scalable Font. .

Scalable Font 01: CG Triumvirate (Resident)

CG Triumvirate: Single Byte Scalable Font ID S01. This is the default resident embedded Scalable Font.

Scalable Font A0: CG Times (Resident)

CG Times: Single Byte Scalable Font ID SA0. This font is resident.

Scalable Font A1: CG Times Italic (Resident)

CG Times Italic: Single Byte Scalable Font ID SA1. This font is resident.

Scalable Font A2: CG Times Bold (Resident)

CG Times Bold: Single Byte Scalable Font ID SA2. This font is resident.

Scalable Font A3: CG Times Bold Italic (Resident)

CG Times Bold Italic: Single Byte Scalable Font ID SA3. This font is resident.

User Downloaded Single Byte Scalable typeface (Binary ID's S50 - S5z..., S90 - S9z)

User Downloaded Single Byte (Binary) Scalable ID's S50 - S5z..., S90 - S9z

User-downloaded Double Byte Scalable Typeface (Binary ID's U50..., U5z..., U90...U9z)

User Downloadable Double Byte (Binary) Scalable ID's U50..., U5z..., U90...U9z

User Downloaded Double Byte Scalable typeface (Hex Ascii ID'su50..., u5z..., u90...u9z)

User Downloaded Double Byte (Hex ASCII) Scalable ID's u50..., u5z..., u90...u9z

DPL to FIJI font mapping

Scalable Font H0: Korean Hangul (Downloaded / Embedded)

Scalable Font 40: Gothic B Kanji (Downloaded / Embedded)

Scalable Fonts C0: Simplified GB Chinese (Downloaded /Embedded)

Scalable Font T0: Traditional Chinese (Downloaded / Embedded)

Scalable Font K1: Gothic E Kanji (Downloaded / Embedded)

Gothic E Kanji: Double Byte Scalable Font ID UK1 Binary / uK1 Hex Ascii. This font is downloaded via dpl plugin. Available upon request from users

System Level Commands Not Supported

The following system commands will not be supported:

Commands	Description
STX C	Command Line Configuration
STX f	Set Form Stop Position (Backfeed Command)
STX M	Set Maximum Label Length
STX O	Set Start of Print (SOP) Position
STX P	Set Hex Dump Mode
STX R	Ribbon Saver Control
STX Y	Output Sensor Values
STX:	Dump RAM configuration to host. DEBUG must be defined.

STX M Set Maximum Label Length

This command instructs the printer move media this distance in search of the top-of-form (label edge, notch, black mark, etc.) before declaring a paper fault. A paper fault condition can occur if this setting is too close (within 0.1 inch [2.54 mm]) to the physical length of the label. Therefore, it is a good practice to set this command to 2.5 to 3 times the actual label length used. The minimum value should be at least 5" (127 mm).

Syntax

<STX>Mnnnn

Parameters

Where:

- nnnn - Is a four-digit length, 0000-9999, in/100 or mm/10. Maximum setting is 9999 (99.99 inches or 2540 mm). The default setting is 16 inches/ 406.4 mm.

Sample

<STX>M0500

Result

The sample above sets a maximum travel distance of 5 inches (unless the printer is in metric mode; see <STX>m).

Extended System Commands

The following extended system commands will not be supported:

Commands	Description
STX K}E	Empty Sensor Calibration
STX K}M	Manual Media Calibration
STX K}Q	Quick Media Calibration
STX KaR	Read Data from RFID Tag
STX KaW	Write Data to RFID Tag
STX Kb	Backfeed Time Delay
STX KF	Select Factory Default
STX Kp	Module Protection
STX Ky	Download Plug-In File
STX KD	Database Configuration
STX Kd	Set File as Factory Default
STX KH	Dot Check
STX KI	GPIO Input
STX Kn	NIC Request
STX KO	GPIO Output
STX KtA	Write Application Family Identifier (AFI) to Tag
STX KtD	Write Data Storage Format Identifier (DSFID) to Tag
STX KtE	Write Electronic Article Surveillance (EAS) Bit
STX KtH	Read and Feedback Tag INformation to Host
STX KtR	Read Data from RFID Tag
STX KtU	Read Unique Serial Number from RFID Tag
STX KtW	Write Data to RFID Tag
STX KuB	Read Data from Gen2 Tag Selection
STX KuF	Send RFID Device Firmware Version
STX KuJ	Write Data to Gen 2 Tag Selection
STX KuR	Read Data from RFID Tag
STX KuW	Write Data to RFID Tag

Commands	Description
STX KV	Verifier Enable/Disable

Configuration Commands Not Supported

The following configuration set commands (<STX>Kc) will not be supported:

Commands	Description
A1	BOOT 1 Architecture (DO CEE Platform Only)
A2	BOOT 2 Architecture (DO CEE Platform Only)
A3	Firmware Architecture (DO CEE Platform Only)
AT	Auto Input Toggle Mode
BS	Backup Speed
EV	Empty Sensor Level
FC	WIFI FCC Testing (compile flag)
FS	Slew Speed (Uses Feed Speed - Honeywell)
GD	Display Mode
GL	Gap Sensor Location (MP Compact Only)
GM	Gap / Mark Value
GR	Gain Reflective Value
GS	GPIO Slew
IE	Ignore Distance (no longer supported - DO)
ML	Max Label Length (Fixed 1.5*Cont length - Honeywell)
MV	Mark Value
PH	Parse LAH
PJ	Present Adjust Fine Tune - (Printer Mech Adjust)
PO	Paper Empty
PV	Paper Value
RV	Reflective Paper Value
SA	SA SOP Adjust (no longer supported - DO)
SB	Smart Battery
SC	Scalable Font Cache
SG	Sensor Gain Value
WP	Windows driver for EZ Emulation
XX	Printer Information
XY	Retail Initiative

Commands	Description
XZ	Retail Initiative
ZR	WIFI Radio Power state.

SA SOP Adjust

This command shifts the vertical start of print position in dots upward or downward.

Parameter:	SA
Value / Range:	+ / – dots
Units / Interpretation:	Resolution specific
Command Equivalent:	N/A

IE Ignore Distances

This command causes the printer to ignore DPL distance commands. Ignore by setting value to N. Process by setting value to Y (default). When set to ignore distance values are controlled via the menu setting.

Parameter:	IE
Value / Range:	Y, N or 1, 0
Units / Interpretation:	Y = Enabled, N = Disabled; or 1 = Enabled, 0 = Disabled
Command Equivalent:	N/A

ML Maximum Length

Distance printer moves paper before detecting TOF fault

See <STX>M for command details.

Parameter:	ML
Value / Range:	0 -9999
Units / Interpretation:	1/100 in. or 1/10 mm
Command Equivalent:	<STX>M

PJ Present Adjust Fine Tune

This command fine-tunes the Present Distance setting in dots to compensate for slight mechanical differences sometimes evident if multiple printers share label formats.

Parameter:	PJ
Value / Range:	+ / – dots
Units / Interpretation:	Dots (model specific)
Command Equivalent:	N/A

Symbol Sets

Commands	Description
D1	11L - ITC Zapf Dingbats/100
D2	12L - ITC Zapf Dingbats/200
D3	13L - ITC Zapf Dingbats/300
DS	10L - PS ITC Zapf Dingbats
PX	12U - PTXT3000
TK	8T - Turkish-8
WN	9U - Windows
EU - Double Byte Encoding	Ö - EUC (Extended UNIX Code)
JS - Double Byte Encoding	Ö - JIS (Japanese Industry Standard); default

Old Commands Not Supported

- [System Level Commands](#)
- [Extended System Commands](#)
- [Configuration Commands](#)

System Level Commands

The following system commands will not be supported:

Commands	Description
STX c	Set Continuous Paper Length Modulus Support
STX M	Set Maximum Label Length
STX P	Set Hex Dump Mode
STX R	Ribbon Saver Control
STX Y	Output Sensor Values
STX:	Dump RAM configuration to host. DEBUG must be defined.
STX z	Pack Module

Extended System Commands

The following extended system commands will not be supported:

Commands	Description
STX K}E	Empty Sensor Calibration
STX K}M	Manual Media Calibration
STX K}Q	Quick Media Calibration
STX KaR	Read Data from RFID Tag
STX KaW	Write Data to RFID Tag
STX Kb	Backfeed Time Delay
STX KF	Select Factory Default
STX Kp	Module Protection
STX Ky	Download Plug-In File
STX KD	Database Configuration
STX Kd	Set File as Factory Default
STX KH	Dot Check
STX KI	GPIO Input
STX Kn	NIC Request
STX KO	GPIO Output
STX KtA	Write Application Family Identifier (AFI) to Tag
STX KtD	Write Data Storage Format Identifier (DSFID) to Tag
STX KtE	Write Electronic Article Surveillance (EAS) Bit
STX KtH	Read and Feedback Tag INformation to Host
STX KtR	Read Data from RFID Tag
STX KtU	Read Unique Serial Number from RFID Tag
STX KtW	Write Data to RFID Tag
STX KuB	Read Data from Gen2 Tag Selection
STX KuF	Send RFID Device Firmware Version
STX KuJ	Write Data to Gen 2 Tag Selection
STX KuR	Read Data from RFID Tag
STX KuW	Write Data to RFID Tag

Commands	Description
STX KV	Verifier Enable/Disable

Configuration Commands

The following configuration set commands (<STX>Kc) will not be supported:

Commands	Description
STX KcA1	BOOT 1 Architecture (DO CEE Platform Only)
STX KcA2	BOOT 2 Architecture (DO CEE Platform Only)
STX KcA3	Firmware Architecture (DO CEE Platform Only)
STX KcAT	Auto Input Toggle Mode
STX KcBS	Backup Speed
STX KcEV	Empty Sensor Level
STX KcFC	Wi-Fi FCC Testing (compile flag)
STX KcFS	Slew Speed (Uses Feed Speed - Fiji)
STX KcGD	Display Mode
STX KcGL	Gap Sensor Location (MP Compact Only)
STX KcGM	Gap/Mark Value
STX KcGR	Gain Reflective Value
STX KcGS	GPIO Slew
STX KcIE	Ignore Distance (no longer supported -DO)
STX KcML	Max Label Length (Fixed 1.5* Cont length - Fiji)
STX KcMV	Mark Value
STX KcPH	Parse LAH
STX KcPJ	Present Adjust Fine Tune - (Printer Mech Adjust)
STX KcPO	Paper Empty
STX KcPV	Paper Value
STX KcRV	Reflective Paper Value
STX KcSA	SA SOP Adjust (no longer supported - DO)
STX KcSB	Smart Battery
STX KcSC	Scalable Font Cache

Commands	Description
STX KcSG	Sensor Gain Value
STX KcWP	Windows driver for EZ Emulation
STX KcXX	Printer Information
STX KcXY	RetaPil Initiative
STX KcXZ	Retail Initiative
STX KcZR	Wi-Fi Radio Power State
STX KcFE	Font Emulation
STX KcFB	Scalable Font Bolding
STX KcNR	No Reprint
STX KcOF	Option Feedback
STX KcSA	SOP Adjust
STX KcAW	Airwatch
STX KcBA	Backup After Print
STX KcBC	Batch Cancel
STX KcBL	Backup Label
STX KcBS	Backup (Reverse Speed)
STX KcBZ	Buzzer Enable
STX KcCU	Configuration Builder
STX KcCP	Center Print
STX KcDE	DPI Emulation
STX KcDR	Delay Rate
STX KcEP	End of Print
STX KcEQ	Start of Print
STX KcGE	GPIO Equipped
STX KcGP	GPIO Error Pause
STX KcGS	GPIO Slew
STX KcHT	Host Timeout
STX KcIE	Ignore Distance
STX KcIL	Image Mode
STX KcLA	Label Alignment

Commands	Description
STX KcLE	Legacy Emulation
STX KcMCC	Module Command
STX KcML	Maximum Length - Distance printer moves paper before detecting TOF fault
STX KcMM	Menu Mode
STX KcPG	Present Delay
STX KcPJ	Present Adjust Fine Tune
STX KcPP	Parallel Direction
STX KcPW	Password Set
STX KcRR	Rewinder Adjust
STX KcRI	RFID
STX KcRI	Reprint Last
STX KcRP	Ribbon Low Pause
STX KcRS	Ribbon Low Signal
STX KcSS	sS Feed Speed
STX KcSV	STX-v
STX KcUD	User Label Mode
STX KcUT	User Terminator

REFERENCE INFORMATION

- [Speed Ranges](#)
- [Format Record Structure](#)
- [Bar Code Format Record Structure](#)
- [Bar Code Summary Data](#)
- [Bar Code Default Widths and Heights](#)

Speed Ranges

Printer Speed Command*	Speed Value:	
	Inches per Second	Millimeters per Second
A	1.0	25
B	1.5	38
C	2.0	51
D	2.5	63
E	3.0	76
F	3.5	89
G	4.0	102
H	4.5	114
I	5.0	127
J	5.5	140
K	6.0	152
L	6.5	165
M	7.0	178
N	7.5	191
O	8.0	203
P	8.5	216
Q	9.0	227
R	9.5	241
S	10.0	254
T	10.5	267
U	11.0	279
V	11.5	292
W	12.0	305
X	13.0	330
Y	14.0	356
Z	15.0	381
a	16.0	406

Printer Speed Command*	Speed Value:	
	Inches per Second	Millimeters per Second
b	17.0	432
c	18.0	457
d	19.0	483
e	20.0	508

*Applicable speed values are printer dependent. See the table below.

Model	Print Speed		Feed Speed		Reverse Speed		Slew Speed	
	Range	Default	Range	Default	Range	Default	Range	Default
PC42t/d	2-4ips	4ips	2-4ips	4ips	N/A	4ips	N/A	N/A
PC42d 6/8ips	2-8ips	6ips	2-8ips	6ips	N/A	4ips	N/A	N/A
PC42tp	2-5ips	4ips	2-5ips	4ips	N/A	4ips	N/A	N/A
OT800/OD800	2-4ips	4ips	2-4ips	4ips	N/A	4ips	N/A	N/A
PC43t/d	2-6ips	4ips	2-8ips	4ips	N/A	2ips	N/A	N/A
PM43	4-12ips	4ips	4-12ips	4ips	N/A	12ips	N/A	N/A
PM42	4-12ips	4ips	4-12ips	4ips	N/A	4ips	N/A	N/A
PD43	2-6ips	4ips	2-8ips	4ips	N/A	2ips	N/A	N/A

PX940A	Print and Feed Speed		Reverse Speed	
	Range	Default	Range	If > 6 ips
203 dpi	50 to 350 mm/sec (2 to 14 ips)	100 mm/s (4ips)	2-6	6
300 dpi	50 to 300 mm/sec (2 to 12 ips)	100 mm/s (4ips)	2-6	6
600 dpi	25 to 150 mm/sec (1 to 6 ips)	50 mm/s (2ips)	1-6	6
900 dpi	25 to 100 mm/sec (1 to 4 ips)	50 mm/s (2ips)	1-4	4
1200 dpi	25 to 100 mm/sec (1 to 4 ips)	50 mm/s (2ips)	1-4	4

PX940V	Print and Feed Speed		Reverse Speed	
	Range	Default	Range	If > 6 ips
203 dpi	50 to 200 mm/sec (2 to 8ips)	100 mm/s (4ips)	2-6	6

PX940V	Print and Feed Speed		Reverse Speed	
300 dpi	50 to 200 mm/sec (2 to 8 ips)	100 mm/s (4ips)	2-6	6
600 dpi	25 to 150 mm/sec (1 to 6 ips)	50 mm/s (2ips)	1-6	6

Format Record Structure

Format records (with spaces between fields added here for readability – the actual data stream cannot contain spaces between fields) conforms to the following fixed-length field format. Identifying lower case letters have been placed below field values for reference in the following sections:

a b[b[b]] c d eee ffff gggg [hhhh iii] jj...j Termination character

Location Within Record	Internal Bitmapped Font	Smooth Font	Scalable Font	Bar Code	Images	Graphics
a	Rotation	Rotation	Rotation	Rotation	Rotation	1
b[b[b]]	Font ID	9	9	Bar Code	Y	X
c	Width Multiplier	Width Multiplier	Width Multiplier	Wide Bar	Width Multiplier	1
d	Height Multiplier	Height Multiplier	Height Multiplier	Narrow Bar	Height Multiplier	1
eee	000	Font Size/ID	ID	Bar Code Height	000	000
Ffff	Row Position	Row Position	Row Position	Row Position	Row Position	Row Position
gggg	Column Position	Column Position	Column Position	Column Position	Column Position	Column Position
hhhh	N/A	N/A	Font Height	N/A	N/A	N/A
iiii	N/A	N/A	Font Width	N/A	N/A	N/A
jj...j	Data String	Data String	Data String	Data String	Image Name	Graphics Specifier

The record structure is shown for each of the record types. The left-most column shows the locations of all characters in the record, and corresponds to the example above the table. Each record structure interprets the characters of the record in its own way, though some of the interpretations of the characters are identical across all record types. For example, the characters ffff are interpreted as Row Position in all record types. While c is a Width Multiplier for Internal Bitmapped Font, Smooth Font, Scalable Font, and Image record types, it has other interpretations for Bar Code and Graphics record types.

The table below defines the allowed values and their meanings for each field type.

Field Type	Allowed Values
a (Rotation)	1=0°, upright; 2=90° clockwise; 3=180°; 4=270° clockwise
b[b[b]] (Field Type)	See individual field types below for allowed values
c (Width multiplier)	1=100% width; 2=200%; 3=300%; to a maximum of z=62x 100% width
d (Height multiplier)	Same as "c" for height
eee	See individual field types below for allowed values
ffff	Row position. Depends on system units value: If Imperial, 1/100ths of inches (1234 is 12.34 inches) If metric, 1/10ths of millimeters (1234 is 123.4mm)
gggg	Column position. Same as "ffff" for row position.
hhhh	See individual field types below for allowed values
iiii	See individual field types below for allowed values
data	Data to be printed; for Images the name of the graphic to be saved; for Graphics, a specifier

Internal Bitmapped Font

This record type is used for internal bitmapped fonts.

Syntax

abcd eee ffff gggg jj...j <CR>

Parameters

Where:

Field	Valid Inputs	Meaning
a	1, 2, 3 and 4	Rotation
b	0 to 8	Font
c	1 to 9, A to Z, and a to z	Width Multiplier
d	1 to 9, A to Z, and a to z	Height Multiplier
eee	000	N/A
ffff	0000 to 9999	Row
gggg	0000 to 9999 Dependent upon printer.	Column
jj...j	Valid ASCII character string up to 255 characters, followed by a termination character.	Data

Behavior

When a 0 through 8 is entered in field b, then the height field eee is not used. The bitmapped fonts include 8 different fonts.

Valid characters:

Font Number	Valid ASCII Characters (decimal)
0	32-127, 255
1	32-168, 171, 172, 225, 255
2	32-168, 171, 172, 225, 255
3	32, 35-38, 40-58, 65-90, 128, 142-144, 146, 153, 154, 156, 157, 165, 168, 225, 255

Font Number	Valid ASCII Characters (decimal)
4	32, 35-38, 40-58, 65-90, 128, 142-144, 146, 153, 154, 156, 157, 165, 168, 225, 255
5	32, 35-38, 40-58, 65-90, 128, 142-144, 146, 153, 154, 156, 157, 165, 168, 225, 255
6	32, 35-38, 40-58, 65-90, 128, 142-144, 146, 153, 154, 156, 157, 165, 168, 225, 255
7	32-126
8	32, 48-57, 60, 62, 67, 69, 78, 83, 84, 88, 90

Font Sizes:

Font sizes are dependent upon the print head resolution of the printer used. The tables below contain a listing of the font sizes by resolution with dimensions given in dots.

203 DPI:

Font	Height	Width	Spacing	Point Size
Font 0	7	5	1	2.5
Font 1	13	7	2	4.6
Font 2	18	10	2	6.4
Font 3	27	14	2	9.6
Font 4	36	18	3	12.8
Font 5	52	18	3	18.4
Font 6	64	32	4	22.7
Font 7	32	15	5	11.3
Font 8	28	15	5	9.9

300 DPI:

Font	Height	Width	Spacing	Point Size
Font 0	10	7	1	2.4
Font 1	19	10	3	4.6
Font 2	27	15	3	6.5
Font 3	40	21	3	9.6
Font 4	53	27	4	12.7

Font	Height	Width	Spacing	Point Size
Font 5	77	27	4	18.5
Font 6	95	47	6	22.8
Font 7	47	22	7	11.3
Font 8	41	22	7	9.8

600 DPI:

Font	Height	Width	Spacing	Point Size
Font 0	20	14	2	2.4
Font 1	38	20	6	4.6
Font 2	54	30	6	6.5
Font 3	80	42	6	9.6
Font 4	106	54	8	12.7
Font 5	154	54	8	18.5
Font 6	190	94	12	22.8
Font 7	94	44	14	11.3
Font 8	82	44	14	9.8

Smooth/Downloaded Bitmapped Fonts

This record type is used for internal smooth fonts (CG Triumvirate) or a bitmapped font downloaded to a memory module; see Font Loading Commands.

Syntax

abcd eee ffff gggg jj...j <CR>

Parameters

Where:

Field	Valid Inputs	Meaning
a	1, 2, 3 and 4	Rotation
b	9	Font
c	1 to 9, A to Z, and a to z	Width Multiplier
d	1 to 9, A to Z, and a to z	Height Multiplier
eee	000	N/A
ffff	0000 to 9999	Row
gggg	0000 to 9999 Dependent upon printer.	Column
jj...j	Valid ASCII character string up to 255 characters, followed by a termination character.	Data

Behavior

When a 9 is entered in field b, then the height field eee determines the font. The internal smooth font has up to 13 font sizes. Values 100 through 999 select individual fonts stored on DRAM, or Flash memory. These include downloaded bitmapped fonts. Use eee values of 096 – 099 for Kanji fonts, if equipped.

Valid characters

- Dependent upon selected symbol set

Font sizes

Point Size	203 DPI Syntax	300, 600 DPI Syntax	Onn Syntax
4	-	A04	-
5	-	A05	000
6	A06	A06	001
8	A08	A08	002
10	A10	A10	003
12	A12	A12	004
14	A14	A14	005
18	A18	A18	006
24	A24	A24	007
30	A30	A30	008
36	A36	A36	009
48	A48	A48	010
72	-	A72	-

Scalable Fonts

Microtype, Monotype, and TrueType (.TTF) Scalable Font file formats are supported. The eee field identifies the scalable font, and data type – normal (binary) or Hex ASCII. Uppercase S or U – binary, lowercase u – Hex ASCII. Values S00 to S9z, and U00 to U9z (u00 to u9z), select a scalable font. S00, S01 and SAx are used for the standard internal (resident) fonts.

Syntax

abcd eee ffff gggg jj...j <CR>

Parameters

Where:

Field	Valid Inputs	Meaning
a	1, 2, 3 and 4	Rotation
b	9	Font
c	1 to 9, A to Z, and a to z	Width Multiplier
d	1 to 9, A to Z, and a to z	Height Multiplier
eee	000	N/A
ffff	0000 to 9999	Row
gggg	0000 to 9999 Dependent upon printer.	Column
jj...j	Valid ASCII character string up to 255 characters, followed by a termination character.	Data

Behavior

Single and Double Byte Character Font Mapping

Font Name	Character Mapping	Font Size Specifier (eee Height)	Point Size
CG Triumvirate Bold Condensed	Single Byte	S00	scalable
CG Triumvirate	Single Byte	S01	scalable
CG Times	Single Byte	SA0	scalable

Font Name	Character Mapping	Font Size Specifier (eee Height)	Point Size
CG Times Italic	Single Byte	SA1	scalable
CG Times Bold	Single Byte	SA2	scalable
CG Times Bold Italic	Single Byte	SA3	scalable
Gothic B Kanji	Double Byte (Binary)	U40	scalable
Gothic B Kanji	Double Byte (Hex ASCII)	u40	scalable
GB Simplified Chinese	Double Byte (Binary)	UC0	scalable
GB Simplified Chinese	Double Byte (Hex ASCII)	uC0	scalable
Korean Hangul	Double Byte (Binary)	UH0	scalable
Korean Hangul	Double Byte (Hex ASCII)	uH0	scalable
User-downloaded typeface	Single Byte (Binary)	S50 - S5z..., S90 - S9z	scalable
User-downloaded Typeface	Double Byte (Binary)	U50...,U5z..., U90...U9z	scalable
User-downloaded typeface	Double Byte (Hex ASCII)	u50...,u5z..., u90...u9z	scalable

Scalable Font 00: CG Triumvirate Bold Condensed (Resident)

CG Triumvirate Bold Condensed. Single Byte Scalable Font ID S00. This is a resident embedded Scalable Font. .

Scalable Font 01: CG Triumvirate (Resident)

CG Triumvirate: Single Byte Scalable Font ID S01. This is the default resident embedded Scalable Font.

Scalable Font A0: CG Times (Resident)

CG Times: Single Byte Scalable Font ID SA0. This font is resident.

Scalable Font A1: CG Times Italic (Resident)

CG Times Italic: Single Byte Scalable Font ID SA1. This font is resident.

Scalable Font A2: CG Times Bold (Resident)

CG Times Bold: Single Byte Scalable Font ID SA2. This font is resident.

Scalable Font A3: CG Times Bold Italic (Resident)

CG Times Bold Italic: Single Byte Scalable Font ID SA3. This font is resident.

User Downloaded Single Byte Scalable typeface (Binary ID's S50 - S5z..., S90 - S9z)

User Downloaded Single Byte (Binary) Scalable ID's S50 - S5z..., S90 - S9z

User-downloaded Double Byte Scalable Typeface (Binary ID's U50..., U5z..., U90...U9z)

User Downloadable Double Byte (Binary) Scalable ID's U50..., U5z..., U90...U9z

User Downloaded Double Byte Scalable typeface (Hex Ascii ID's u50..., u5z..., u90...u9z)

User Downloaded Double Byte (Hex ASCII) Scalable ID's u50..., u5z..., u90...u9z

DPL to FIJI font mapping

Scalable Font H0: Korean Hangul (Downloaded / Embedded)

Scalable Font 40: Gothic B Kanji (Downloaded / Embedded)

Scalable Fonts C0: Simplified GB Chinese (Downloaded /Embedded)

Scalable Font T0: Traditional Chinese (Downloaded / Embedded)

Images

An image record is used to print an image that is stored in a memory module. Images can be printed only in Rotation 1; see <STX>I.

Syntax

abcd eee ffff gggg jj...j <CR>

Parameters

Where:

Field	Valid Inputs	Meaning
a	1	Rotation
b	Y	Image
c	1 to 9, A to Z, and a to z	Width Multiplier
d	1 to 9, A to Z, and a to z	Height Multiplier
eee	000	Fixed
ffff	0000 to 9999	Row
gggg	0000 to 9999 Dependent upon printer.	Column
jj...j	ASCII string, up to 16 characters followed by a termination character.	Image Name

Limitations:

The supported graphic types are:

- 7-bit Datamax-O'Neil image load file,
- BMP 8-bit format, flipped, black and white (B&W)
- BMP 8-bit format, B&W
- IMG 8-bit format, flipped, B&W
- IMG 8-bit format, B&W
- PCX 8-bit format, flipped, B&W
- PCX 8-bit format, B&W
- RLE-2 8-bit format, B&W

Lines and Boxes

Lines and boxes are drawn by values that determine column and row starting position, length, width, and wall thickness of the line or box. Depending on the printer's mode, all measurements are interpreted as inches/100 or millimeters/10 (see <STX>m). The data field jj...j is used to describe the line or box dimensions.

Syntax

abcd eee ffff gggg jj...j <CR>

Parameters

Where:

Field	Valid Inputs	Meaning
a	1	Fixed Value
b	X	Line / Box
c	1	Fixed Value
d	1	Fixed Value
eee	000	Fixed Value
ffff	0000 to 9999	Row
gggg	0000 to 9999	Column
jj...j	Lhhhvvv lhhhhvvvv Bhhhvvvbbbsss bhhhhvvvvbbbbssss	Line* Line** Box*** Box****

Line*: Lhhhvvv

Where:

- L = "L" and specifies line drawing;
- hhh= horizontal width of line;
- vv = vertical height of line.

Line**: lhhhhvvvv

Where:

- l = "l" and specifies line drawing;
- Hhhh = horizontal width of line;

- vvv = vertical height of line.

Box***: Bhhhvvvbbbsss

Where:

- B = "B" and specifies box drawing;
- Hhh = horizontal width of box;
- vvv = vertical height of box;
- bbb = thickness of bottom and top box edges;
- sss = thickness of box sides.

Box****: bhhhhvvvvbbbssss

Where: b ="b" and specifies box drawing;

- hhhh =horizontal width of box;
- vvvv =vertical height of box;
- bbbb =thickness of bottom and top box edges;
- ssss = thickness of box sides

Behavior

- Boxes fill/grow "in" from the bounding box

Polygons

Polygons are created by defining the positions of the corners, specifying a number of data points that represent the vertices of the object, which can range from a simple line (two points), or a triangle (three points), to any free-form outline. All row/column specifiers are interpreted as inches/100 or millimeters/10 depending on the printer mode, (see <STX>m).

Syntax

1 X 11 ppp rrrr cccc P ppp bbbb rrrr cccc rrrr cccc ... <CR>

Parameters

Field	Valid Inputs	Meaning
1	1	Fixed Value
X	X	Polygon
1	1	Fixed Value
1	1	Fixed Value
rrrr	0000 to 9999	Row of point 1
cccc	0000 to 9999	Column of point 1
P	Polygon ID	Fixed Value
ppp	001	Fixed Value
bbbb	0001	Fixed Value
rrrr	0000 to 9999	Row of point 2
cccc	0000 to 9999	Column of point 2
rrrr	0000 to 9999	Row of point 3
cccc	0000 to 9999	Column of point 3
...	...	Additional points
<CR>	Termination character	Termination character

Sample

1X1100000100010P00100010040002500100040

Result

Produces a triangle with no fill pattern.

Limitations

Fill Patterns not yet supported.

Circles

A circle is created by defining by its center point and radius. Row, column, and radius are interpreted as inches (100) or millimeters (10) depending on printer mode. Record structure for a circle (spaces have been added for readability):

Syntax

```
1 X 11 fff rrrr cccc C ppp bbbb rrrr <CR>
```

Parameters

Where:

Field	Valid Inputs	Meaning
1	1	Fixed Value
X	X	Circle
1	1	Fixed Value
1	1	Fixed Value
fff	000	No Fill Pattern
rrrr	0000 to 9999	Row of the center point
cccc	0000 to 9999	Column of the center point
C	Circle ID	Fixed Value
ppp	001	Fixed Value
bbbb	0001	Fixed Value
rrrr	0000 to 9999	Radius of the circle
<CR>	Termination character	Termination character

Sample record

```
1X1100001000100C00100010025<CR>
```

Result

Produces a circle centered at row 0100, column 0100 with a radius of 0025 and no fill pattern.

Limitations

Fill pattern is not yet supported

Bar Code Format Record Structure

Valid inputs for the bar code field b are letters: uppercase letters will print a human readable text below the bar code; lowercase letters will only print the bar code. For example, entering a "p" in the b field selects the Postnet bar code. Because the Postnet font does not provide human-readable data, the uppercase P is not valid. Other bar codes without a human-readable counterpart include u (MaxiCode) and z (PDF417).

For module-based bar codes, field d is the narrow bar width in dots (bar code module size). For consistent results in all rotations for bar codes of this type, field d and field c must have the same value. For ratio-based bar codes field c is the wide bar width in dots (the numerator); field d is the narrow bar width in dots (the denominator).

The eee height field represents the bar code (symbol) height. The valid range (001 to 999) translates to bar heights ranging from .01 inch (.254 mm) to 9.99 inches (253.7 mm). For bar codes that require additional specified parameters, use the jj..j data field as the location for these parameters.

Syntax

abcd eee ffff gggg jj..j <CR>

Parameters

Where:

Field	Valid Inputs	Meaning
a	1, 2, 3 and 4	Rotation (see Format Record Structure for rotation definitions)
b[b[b]]	A-Z, a-z P, u, v, z unused	Bar Code Symbology Designator
c	1 to 9, A to Z, and a to z	Wide Bar
d	1 to 9, A to Z, and a to z	Narrow Bar
eee	001 to 999	Symbol Height
ffff	0000 to 9999	Row
gggg	0000 to 9999. Dependent upon printer.	Column

Field	Valid Inputs	Meaning
jj...j	Valid ASCII character string up to 255 characters, followed by a termination character.	Data

Bar Code Summary Data

Bar code fonts have alpha names (left column, below). Uppercase alpha names will print bar codes with human-readable interpretations, if supported. Lowercase alpha names will print bar codes only. Place the ID in field b of the Format Record header to cause the printer to encode the data field using the associated symbology.

Bar Code ID	Symbology	Length	Checksum	Valid ASCII Characters, decimal value representation
A / a	Code 39	Varies	No	32, 36, 37, 42, 43, 45-57, 65-90
B / b	UPC-A	11	Yes	48-57 Numeric only. Option V used in the 6th & 7th position
C / c	UPC-E	6	Yes	48-57 Numeric only
D / d	Interleaved 2 of 5 (I2 of 5)	Varies	No	48-57 Numeric only
E / e	Code 128	Varies	M-103	32-127
F / f	EAN-13	12	Yes	48-57 Numeric only. Option V used in 7th & 8th position
G / g	EAN-8	7	Yes	48-57 Numeric only
H / h	HIBC	Varies	M-43	32, 36-39, 42, 43, 45-57, 65-90
I / i	Codabar	Varies	No	36, 43, 45-58, 65-68
J / j ü	Interleaved 2 of 5 w/ a modulo 10 checksum	Varies	M-10	48-57 Numeric only
K / k	Plessey	Up to 14	M-10	48-57 Numeric only. Option + is last character for 2nd M-11 chksum
L / l	Interleaved 2 of 5 w/ modulo 10 checksum & bearer bars	13	M-10	48-57 Numeric only
M / m	2 digit UPC addendum	2	Yes	48-57 Numeric only
N / n	5 digit UPC addendum	5	Yes	48-57 Numeric only
O / o	Code 93	Varies	No	35-38, 42-58, 65-90, 97-122

Bar Code ID	Symbology	Length	Checksum	Valid ASCII Characters, decimal value representation
p	Postnet	Varies	Yes	48-57 Numeric only
Q / q	UCC/EAN 128	19	Yes	48-57 Numeric only
R / r	UCC/EAN 128 K-Mart non-EDI	18	Yes	48-57 Numeric only
S / s ü	UCC/EAN 128 Random Weight	34 +	Yes	48-57 Numeric only
T / t	Telepen	Varies	Yes	All ASCII characters
U	UPS MaxiCode	84	Yes	Alphanumeric
u	UPS MaxiCode w/ Byte Count	Specified	Yes	Alphanumeric
v	FIM	1	No	A, B, C, D
z	PDF417	Varies	Yes	All
Z	PDF417 w/ Byte Count	Specified	Yes	All
W1c	DataMatrix	Varies	Yes	All 8-bit values
W1C	DataMatrix w/ Byte Count	Specified	Yes	All 8-bit values
W1d	QR Code – Auto format	Varies	Yes	Alphanumeric
W1D	QR Code – Manual format	Varies	Yes	Single-byte or Kanji double- byte
W1f	Aztec	Varies	Yes	All 8-bit values
W1F	Aztec w/ Byte Count	Specified	Yes	All 8-bit values
W1G / W1g	USD-8 (Code 11)	Varies	Yes	45, 48-57
W1I	EAN 128 w/auto subset switching	Varies	Yes	32-127
W1J ü	Code 128 w/auto subset switching	Varies	Yes	32-127

Bar Code ID	Symbology	Length	Checksum	Valid ASCII Characters, decimal value representation
W1k	GS1 DataBar (six types)	Varies	Yes	Numeric / Alphanumeric (type dependent)
W1L	Planet Code	Varies	Yes	48-57 Numeric only
W1M / W1m	Australia Post 4-State Bar Code	Varies	Yes	Numeric / Alphanumeric (type dependent)
W1N / W1n	Industrial 2 of 5	Varies	M-10	48-57 Numeric only
W1p	Intelligent Mail Bar Code (IMB)	Varies	No	48-57 Numeric only
W1q	CODABLOCK	Varies	Yes	32, 36, 37, 42, 43, 45-57, 65-90 / All ASCII characters (type dependent)
W1R	UCC/EAN Code 128 K-MART NON EDI	18	Yes	48-57 Numeric only
W1S / W1s	Standard 2 of 5	Varies	M-10	48-57 Numeric only
W1t	TCIF Linked 3 of 9 (TLC39)	Varies	Yes	Alphanumeric
W1Y / W1y	Code 16K	Varies	Yes	All ASCII characters
W1z	MicroPDF417	Varies	Yes	All 8-bit value
W1Z	W1Z MicroPDF417 w/ Byte Count	Specified	Yes	All 8-bit values

Bar Code Default Widths and Heights

Font	203 DPI Height (inches)	203 DPI Ratio / Module Size	300 DPI Height (inches)	300 DPI Ratio / Module Size	600 DPI Height (inches)	600 DPI Ratio / Module Size
A	.40	6:2	.40	9:4	.40	18:6
B	.80	3	.80	4	.80	9
C	.80	3	.80	4	.80	9
D	.40	5:2	.40	9:4	.40	15:6
E	.40	2	.40	4	.40	6
F	.80	3	.80	4	.80	9
G	.80	3	.80	4	.80	9
H	.40	6:2	.40	9:4	.40	18:6
I	.40	6:3	.40	9:4	.40	18:6
J	.40	5:2	.40	9:4	.40	15:6
K	.40	5:2	.40	9:4	.40	15:6
L	1.30	5:2	1.30	9:4	1.30	15:6
M	.90	3	.90	4	.90	9
N	.80	3	.80	4	.80	9
O	.40	6:3	.40	8:4	.40	18:9
p	.08	N/A	.08	N/A	.08	N/A
Q	1.40	2	1.40	4	1.40	6
R	1.40	2	1.40	4	1.40	6
S	1.40	2	1.40	4	1.40	6
T	.80	1	.80	1	.80	3
U/u	1.00	N/A	1.00	N/A	1.00	N/A
v	.50	1	.50	1	.50	3
z	N/A	N/A	N/A	N/A	N/A	N/A
Z	N/A	N/A	N/A	N/A	N/A	N/A
W1C/W1c	N/A	N/A	N/A	N/A	N/A	N/A
W1D/W1d	N/A	N/A	N/A	N/A	N/A	N/A
W1F/W1f	N/A	N/A	N/A	N/A	N/A	N/A

Font	203 DPI Height (inches)	203 DPI Ratio / Module Size	300 DPI Height (inches)	300 DPI Ratio / Module Size	600 DPI Height (inches)	600 DPI Ratio / Module Size
W1G/W1g	0.50	5:2	0.50	7:3	0.50	14:6
W1I	.40	2	.40	4	.40	6
W1J	.40	2	.40	4	.40	6
W1k	N/A	2	N/A	3	N/A	6
W1L	.80	N/A	.80	N/A	.80	N/A
W1M/W1m	N/A	N/A	N/A	N/A	N/A	N/A
W1N/W1n	.40	6:2	.40	9:4	.40	18:6
W1p	N/A	N/A	N/A	N/A	N/A	N/A
W1q	.40	2	.40	4	.40	6
W1R	1.40	2	1.40	4	1.40	6
W1S/W1s	.40	6:2	.40	9:4	.40	18:6
W1t	.40	6:2	.40	9:4	.40	18:6
W1Y/ W1y	.40	2	.40	4	.40	6
W1Z/W1z	N/A	N/A	N/A	N/A	N/A	N/A

Honeywell
855 S. Mint Street
Charlotte, NC 28202

sps.honeywell.com